

Detail Bill of Material

Project Name: Linde Phoenix AZ TSMC Phases
AP21-1+ 5
General Order No:
Bid Date 9/30/2026

Negotiation No: RH130721X6K2
Alternate No: 0005
Est. Purchase Date: 9/30/2026

Item No.	Qty	Product	Description
	1	Medium Voltage Assemblies	Witness Test

Standard Eaton Witness Test
Price is PER DAY

Catalog No Witness Test

Item No.	Qty	Product	Description
	1	Medium Voltage Assemblies	MVA3 Spare Parts

Designation MVA SPARES

Qty List of Materials

- 3 Fuse NCLPT5.5KV 1.0E for VT Primary
- 2 Pull Fuse Block 2P 30A for VT Secondary
- 2 Fuse 6A Control for VT Secondary
- 1 Breaker for VT Secondary-Arc

Item No.	Qty	Product	Description
	1	Medium Voltage Assemblies	Medium Voltage Assemblies, 4160V, 3-Phase, 3-Wire, 60 Hertz, 50 kA, 1200 Amps Main Bus Rating

Designation 14-ES9486.1A

Structure

- 1 Cell, 50kA Arc Resistant Switchgear IEEE Type 2B, 5kV 1200 A**
- D Compartment - Voltage transformer 5 kV**
 - 1 Closed-Door Racking Provision w/ plug - VT Compartment
- B Compartment - Unable to find the Price Table**
 - 1 Blank -- Comp B
 - 1 Meter - Crompton - VOLT-STD-AC-007
 - 1 SWITCH, SELECTOR - Electros witch - 24-VOLT

Project Name: Linde Phoenix AZ TSMC Phases
AP21-1+ 5

Negotiation No: RH130721X6K2

General Order No:

Alternate No: 0005

Bid Date 9/30/2026

Est. Purchase Date: 9/30/2026

Structure

2 Cell, 50kA Arc Resistant Switchgear IEEE Type 2B, 5kV 1200 A

1 Lightning arrester distribution class 6 kV - Set of 3

1 Ground Stud - set

1 Cable lugs, extra sets (1st included)

1 Door-Mounted Duplex Receptacle

D Compartment - Breaker Compartment 5 VCP-W 50kA 1200A

1 Zero Sequence CT, Rect 8x20in ID

3 CT, single ratio, high accuracy

1 Breaker undervoltage trip

1 MOC switch 9 poles (5a / 4b contacts)

1 TOC switch 9 poles (4a / 5b contacts)

1 Relay Box

1 Closed Door Breaker Position Indication

1 Breaker Control Switch, Electroswitch Series 24

1 M22 LED Push-To-Test light assembly, qty 2 (red & green)

1 MCCB protection for common motor and close, separate trip ckts

B Compartment - Unable to find the Price Table

1 Blank -- Comp B

1 Relay - Protective - Schweitzer Engineering Lab - SEL-751

1 Switch, Test - ABB - FT-1

1 Switch, Selector - Eaton - ARM-SWITCH-ASSY

1 Switch, Selector - Electroswitch - 24-AMM

1 Meter - Crompton - AMM-STD-AC-007

1 Relay - Lockout - Electroswitch - LOR-24

1 Receptacle - Bryant - RECEPTACLE

2 Pushbutton - Eaton - PUSHBUTTON-M22

1 Breaker acc - Eaton - BKR-GHC

1 Relay - Eaton - D26_6-8P

2 Relay - TE Connectivity - R10

1 Diode - NTE Electronics - DIODE

2 Resistor - Power - OHMITE - RESISTOR-ADJ

2 Light - Eaton - E22-RESISTOR

1 Capacitor - Power - Sprague - CAPACITOR-W

1 Switch, Test - ABB - FT-1-PLUG

Structure

3 Cell, 50kA Arc Resistant Switchgear IEEE Type 2B, 5kV 1200 A

1 Arc Duct (Up to 4 feet) with End Louver for Ampgard Arc Gear

1 Upper Sectionalizing Bus 1200A

1 Upper Vertical Bus 1200A

1 Coordination to AmpGard MCC's 1200 Amps

Project Name: Linde Phoenix AZ TSMC Phases
AP21-1+ 5
General Order No:
Bid Date 9/30/2026

Negotiation No: RH130721X6K2
Alternate No: 0005
Est. Purchase Date: 9/30/2026

Structure

1 Two 50kA Arc Ducts (Up to 4 feet each) with End Louvers
1 Arc Duct Coordination
1 Direct Roll In Breaker
3 Floor plate (indoor)
3 Ground Bus plating
3 Epoxy bus supports
1 Closed-Door Racking Provision w/ plug - Breaker Compartment
1 Closed Door Lockout/Tagout for Breaker Compartments
2 Closed Door Lockout/Tagout Tool for Breaker Compartments
3 Control Wire Gauge - #14
3 Control Wire Color - Gray
2 CT Wire Gauge - #10 SIS
2 CT Wire Color - Gray
1 Ground Wire Gauge - Standard #14
1 Ground Wire Color - Green
3 Wire Identification
3 Control Wire Markers - Sleeved
3 Harness Wire Markers - Sleeved
3 VW-1 Type Wiring
3 Insulated Lock-In Fork wire lugs
3 Communication wiring - Fiber Optic
2 Short circuit terminal block
3 Device nameplate
1 Accessories - standard set
1 Set of extension rails
1 Test jumper
1 Levering crank
1 Maintenance tool for manually charging the breaker
1 Breaker lifting yoke
1 Breaker lifting device (Manual Crank)
1 Test cabinet, DC
1 Electrical levering device
1 Freight on Board

Qty List of Materials

1 SEL 751001A6X1A7085BD81
1 Use incoming main and line side PTs from MRH0010824 for reference
3 Cell, 50kA Arc Resistant Switchgear IEEE Type 2B, 5kV 1200 A
1 Breaker Compartment 5 VCP-W 50kA 1200A
3 CT, single ratio, high accuracy
1 Zero Sequence CT, Rect 8x20in ID
2 Voltage transformer 5 kV
1 Lightning arrester distribution class 6 kV - Set of 3
1 Two 50kA Arc Ducts (Up to 4 feet each) with End Louvers
1 Arc Duct (Up to 4 feet) with End Louver for Ampgard Arc Gear
1 Arc Duct Coordination
1 Breaker undervoltage trip
1 Direct Roll In Breaker
1 MOC switch 9 poles (5a / 4b contacts)
1 TOC switch 9 poles (4a / 5b contacts)
3 Floor plate (indoor)
1 Upper Sectionalizing Bus 1200A
1 Upper Vertical Bus 1200A
3 Ground Bus plating
1 Ground Stud - set

Detail Bill of Material

Project Name: Linde Phoenix AZ TSMC Phases
AP21-1+ 5
General Order No:
Bid Date 9/30/2026

Negotiation No: RH130721X6K2
Alternate No: 0005
Est. Purchase Date: 9/30/2026

Qty List of Materials

- 3 Epoxy bus supports
- 1 Cable lugs, extra sets (1st included)
- 1 Relay Box
- 1 Closed-Door Racking Provision w/ plug - Breaker Compartment
- 1 Closed-Door Racking Provision w/ plug - VT Compartment
- 1 Closed Door Breaker Position Indication
- 1 Closed Door Lockout/Tagout for Breaker Compartments
- 2 Closed Door Lockout/Tagout Tool for Breaker Compartments
- 3 Control Wire Gauge - #14
- 3 Control Wire Color - Gray
- 2 CT Wire Gauge - #10 SIS
- 2 CT Wire Color - Gray
- 1 Ground Wire Gauge - Standard #14
- 1 Ground Wire Color - Green
- 3 Wire Identification
- 3 Control Wire Markers - Sleeved
- 3 Harness Wire Markers - Sleeved
- 3 VW-1 Type Wiring
- 3 Insulated Lock-In Fork wire lugs
- 3 Communication wiring - Fiber Optic
- 2 Short circuit terminal block
- 3 Device nameplate
- 1 Door-Mounted Duplex Receptacle
- 1 Coordination to AmpGard MCC's 1200 Amps
- 1 Breaker acc - Eaton - BKR-GHC
- 1 Capacitor - Power - Sprague - CAPACITOR-W
- 1 Breaker Control Switch, Electroswitch Series 24
- 1 M22 LED Push-To-Test light assembly, qty 2 (red & green)
- 1 MCCB protection for common motor and close, separate trip ckts
- 1 Diode - NTE Electronics - DIODE
- 1 Fuse and Fuse Block & Holder - Eaton - FUSE-PULL20-2
- 1 Fuse and Fuse Block & Holder - Eaton - FUSE-PULL30-2
- 2 Light - Eaton - E22-RESISTOR
- 1 Accessories - standard set
- 1 Maintenance tool for manually charging the breaker
- 1 Levering crank
- 1 Test jumper
- 1 Breaker lifting yoke
- 1 Set of extension rails
- 1 Breaker lifting device (Manual Crank)
- 1 Test cabinet, DC
- 1 Electrical levering device
- 1 Freight on Board
- 1 Meter - Crompton - VOLT-STD-AC-007
- 1 Meter - Crompton - AMM-STD-AC-007
- 2 Pushbutton - Eaton - PUSHBUTTON-M22
- 1 Receptacle - Bryant - RECEPTACLE
- 2 Relay - TE Connectivity - R10
- 1 Relay - Eaton - D26_6-8P
- 1 Relay - Lockout - Electroswitch - LOR-24
- 1 Relay - Protective - Schweitzer Engineering Lab - SEL-751
- 2 Resistor - Power - OHMITE - RESISTOR-ADJ
- 1 Switch, Selector - Electroswitch - 24-BKR-CNTL
- 1 SWITCH, SELECTOR - Electroswitch - 24-VOLT
- 1 Switch, Selector - Electroswitch - 24-AMM
- 1 Switch, Selector - Eaton - ARM-SWITCH-ASSY
- 1 Switch, Test - ABB - FT-1-PLUG
- 1 Switch, Test - ABB - FT-1
- 1 Total Freight Price

Project Name: Linde Phoenix AZ TSMC Phases
AP21-1+ 5
General Order No:
Bid Date 9/30/2026

Negotiation No: RH130721X6K2
Alternate No: 0005
Est. Purchase Date: 9/30/2026

Item No.	Qty	Product	Description
	1	Medium Voltage Assemblies	Medium Voltage Assemblies, 4160V, 3-Phase, 3-Wire, 60 Hertz, 50 kA, 1200 Amps Main Bus Rating
		Designation	14-ES9486.1B
Structure	1	Cell, 50kA Arc Resistant Switchgear IEEE Type 2B, 5kV 1200 A	
	D	Compartment - Voltage transformer 5 kV	1 Closed-Door Racking Provision w/ plug - VT Compartment
	B	Compartment - Unable to find the Price Table	1 Blank -- Comp B 1 Meter - Crompton - VOLT-STD-AC-007 1 SWITCH, SELECTOR - Electroschwitch - 24-VOLT
Structure	2	Cell, 50kA Arc Resistant Switchgear IEEE Type 2B, 5kV 1200 A	
			1 Lightning arrester distribution class 6 kV - Set of 3 1 Ground Stud - set 1 Cable lugs, extra sets (1st included) 1 Door-Mounted Duplex Receptacle
	D	Compartment - Breaker Compartment 5 VCP-W 50kA 1200A	1 Zero Sequence CT, Rect 8x20in ID 3 CT, single ratio, high accuracy 1 Breaker undervoltage trip 1 MOC switch 9 poles (5a / 4b contacts) 1 TOC switch 9 poles (4a / 5b contacts) 1 Relay Box 1 Closed Door Breaker Position Indication 1 Breaker Control Switch, Electroschwitch Series 24 1 M22 LED Push-To-Test light assembly, qty 2 (red & green) 1 MCCB protection for common motor and close, separate trip ckts
	B	Compartment - Unable to find the Price Table	1 Blank -- Comp B 1 Relay - Protective - Schweitzer Engineering Lab - SEL-751 1 Switch, Test - ABB - FT-1 1 Switch, Selector - Eaton - ARM-SWITCH-ASSY 1 Switch, Selector - Electroschwitch - 24-AMM 1 Meter - Crompton - AMM-STD-AC-007 1 Relay - Lockout - Electroschwitch - LOR-24 1 Receptacle - Bryant - RECEPTACLE 2 Pushbutton - Eaton - PUSHBUTTON-M22 1 Breaker acc - Eaton - BKR-GHC 1 Relay - Eaton - D26_6-8P 2 Relay - TE Connectivity - R10 1 Diode - NTE Electronics - DIODE 2 Resistor - Power - OHMITE - RESISTOR-ADJ 2 Light - Eaton - E22-RESISTOR 1 Capacitor - Power - Sprague - CAPACITOR-W 1 Switch, Test - ABB - FT-1-PLUG
Structure	3	Cell, 50kA Arc Resistant Switchgear IEEE Type 2B, 5kV 1200 A	
			1 Arc Duct (Up to 4 feet) with End Louver for Ampgard Arc Gear 1 Upper Sectionalizing Bus 1200A 1 Upper Vertical Bus 1200A 1 Coordination to AmpGard MCC's 1200 Amps

Detail Bill of Material

Project Name: Linde Phoenix AZ TSMC Phases
AP21-1+ 5
General Order No:
Bid Date 9/30/2026

Negotiation No: RH130721X6K2
Alternate No: 0005
Est. Purchase Date: 9/30/2026

Structure

- 1 Two 50kA Arc Ducts (Up to 4 feet each) with End Louvers
- 1 Arc Duct Coordination
- 1 Direct Roll In Breaker
- 3 Floor plate (indoor)
- 3 Ground Bus plating
- 3 Epoxy bus supports
- 1 Closed-Door Racking Provision w/ plug - Breaker Compartment
- 1 Closed Door Lockout/Tagout for Breaker Compartments
- 2 Closed Door Lockout/Tagout Tool for Breaker Compartments
- 3 Control Wire Gauge - #14
- 3 Control Wire Color - Gray
- 2 CT Wire Gauge - #10 SIS
- 2 CT Wire Color - Gray
- 1 Ground Wire Gauge - Standard #14
- 1 Ground Wire Color - Green
- 3 Wire Identification
- 3 Control Wire Markers - Sleeved
- 3 Harness Wire Markers - Sleeved
- 3 VW-1 Type Wiring
- 3 Insulated Lock-In Fork wire lugs
- 3 Communication wiring - Fiber Optic
- 2 Short circuit terminal block
- 3 Device nameplate
- 1 Accessories - standard set
- 1 Set of extension rails
- 1 Test jumper
- 1 Levering crank
- 1 Maintenance tool for manually charging the breaker
- 1 Breaker lifting yoke
- 1 Breaker lifting device (Manual Crank)
- 1 Test cabinet, DC
- 1 Electrical levering device
- 1 Freight on Board

Qty List of Materials

- 1 SEL 751001A6X1A7085BD81
- 1 Use incoming main and line side PTs from MRH0010824 for reference
- 3 Cell, 50kA Arc Resistant Switchgear IEEE Type 2B, 5kV 1200 A
- 1 Breaker Compartment 5 VCP-W 50kA 1200A
- 3 CT, single ratio, high accuracy
- 1 Zero Sequence CT, Rect 8x20in ID
- 2 Voltage transformer 5 kV
- 1 Lightning arrester distribution class 6 kV - Set of 3
- 1 Two 50kA Arc Ducts (Up to 4 feet each) with End Louvers
- 1 Arc Duct (Up to 4 feet) with End Louver for Ampgard Arc Gear
- 1 Arc Duct Coordination
- 1 Breaker undervoltage trip
- 1 Direct Roll In Breaker
- 1 MOC switch 9 poles (5a / 4b contacts)
- 1 TOC switch 9 poles (4a / 5b contacts)
- 3 Floor plate (indoor)
- 1 Upper Sectionalizing Bus 1200A
- 1 Upper Vertical Bus 1200A
- 3 Ground Bus plating
- 1 Ground Stud - set

Detail Bill of Material

Project Name: Linde Phoenix AZ TSMC Phases
AP21-1+ 5
General Order No:
Bid Date 9/30/2026

Negotiation No: RH130721X6K2
Alternate No: 0005
Est. Purchase Date: 9/30/2026

Qty List of Materials

- 3 Epoxy bus supports
- 1 Cable lugs, extra sets (1st included)
- 1 Relay Box
- 1 Closed-Door Racking Provision w/ plug - Breaker Compartment
- 1 Closed-Door Racking Provision w/ plug - VT Compartment
- 1 Closed Door Breaker Position Indication
- 1 Closed Door Lockout/Tagout for Breaker Compartments
- 2 Closed Door Lockout/Tagout Tool for Breaker Compartments
- 3 Control Wire Gauge - #14
- 3 Control Wire Color - Gray
- 2 CT Wire Gauge - #10 SIS
- 2 CT Wire Color - Gray
- 1 Ground Wire Gauge - Standard #14
- 1 Ground Wire Color - Green
- 3 Wire Identification
- 3 Control Wire Markers - Sleeved
- 3 Harness Wire Markers - Sleeved
- 3 VW-1 Type Wiring
- 3 Insulated Lock-In Fork wire lugs
- 3 Communication wiring - Fiber Optic
- 2 Short circuit terminal block
- 3 Device nameplate
- 1 Door-Mounted Duplex Receptacle
- 1 Coordination to AmpGard MCC's 1200 Amps
- 1 Breaker acc - Eaton - BKR-GHC
- 1 Capacitor - Power - Sprague - CAPACITOR-W
- 1 Breaker Control Switch, Electroswitch Series 24
- 1 M22 LED Push-To-Test light assembly, qty 2 (red & green)
- 1 MCCB protection for common motor and close, separate trip ckts
- 1 Diode - NTE Electronics - DIODE
- 1 Fuse and Fuse Block & Holder - Eaton - FUSE-PULL20-2
- 1 Fuse and Fuse Block & Holder - Eaton - FUSE-PULL30-2
- 2 Light - Eaton - E22-RESISTOR
- 1 Accessories - standard set
- 1 Maintenance tool for manually charging the breaker
- 1 Levering crank
- 1 Test jumper
- 1 Breaker lifting yoke
- 1 Set of extension rails
- 1 Breaker lifting device (Manual Crank)
- 1 Test cabinet, DC
- 1 Electrical levering device
- 1 Freight on Board
- 1 Meter - Crompton - VOLT-STD-AC-007
- 1 Meter - Crompton - AMM-STD-AC-007
- 2 Pushbutton - Eaton - PUSHBUTTON-M22
- 1 Receptacle - Bryant - RECEPTACLE
- 2 Relay - TE Connectivity - R10
- 1 Relay - Eaton - D26_6-8P
- 1 Relay - Lockout - Electroswitch - LOR-24
- 1 Relay - Protective - Schweitzer Engineering Lab - SEL-751
- 2 Resistor - Power - OHMITE - RESISTOR-ADJ
- 1 Switch, Selector - Electroswitch - 24-BKR-CNTL
- 1 SWITCH, SELECTOR - Electroswitch - 24-VOLT
- 1 Switch, Selector - Electroswitch - 24-AMM
- 1 Switch, Selector - Eaton - ARM-SWITCH-ASSY
- 1 Switch, Test - ABB - FT-1-PLUG
- 1 Switch, Test - ABB - FT-1
- 1 Total Freight Price

Project Name: Linde Phoenix AZ TSMC Phases
AP21-1+ 5
General Order No:
Bid Date 9/30/2026

Negotiation No: RH130721X6K2
Alternate No: 0005
Est. Purchase Date: 9/30/2026

Item No.	Qty	Product	Description
	1	Medium Voltage Assemblies	Medium Voltage Assemblies, 4160V, 3-Phase, 3-Wire, 60 Hertz, 50 kA, 1200 Amps Main Bus Rating
		Designation	14-ES9486.1C
Structure	1	Cell, 50kA Arc Resistant Switchgear IEEE Type 2B, 5kV 1200 A	
	D	Compartment - Voltage transformer 5 kV	1 Closed-Door Racking Provision w/ plug - VT Compartment
	B	Compartment - Unable to find the Price Table	1 Blank -- Comp B 1 Meter - Crompton - VOLT-STD-AC-007 1 SWITCH, SELECTOR - Electroschwitch - 24-VOLT
Structure	2	Cell, 50kA Arc Resistant Switchgear IEEE Type 2B, 5kV 1200 A	1 Lightning arrester distribution class 6 kV - Set of 3 1 Ground Stud - set 1 Cable lugs, extra sets (1st included) 1 Door-Mounted Duplex Receptacle
	D	Compartment - Breaker Compartment 5 VCP-W 50kA 1200A	1 Zero Sequence CT, Rect 8x20in ID 3 CT, single ratio, high accuracy 1 Breaker undervoltage trip 1 MOC switch 9 poles (5a / 4b contacts) 1 TOC switch 9 poles (4a / 5b contacts) 1 Relay Box 1 Closed Door Breaker Position Indication 1 Breaker Control Switch, Electroschwitch Series 24 1 M22 LED Push-To-Test light assembly, qty 2 (red & green) 1 MCCB protection for common motor and close, separate trip ckts
	B	Compartment - Unable to find the Price Table	1 Blank -- Comp B 1 Relay - Protective - Schweitzer Engineering Lab - SEL-751 1 Switch, Test - ABB - FT-1 1 Switch, Selector - Eaton - ARM-SWITCH-ASSY 1 Switch, Selector - Electroschwitch - 24-AMM 1 Meter - Crompton - AMM-STD-AC-007 1 Relay - Lockout - Electroschwitch - LOR-24 1 Receptacle - Bryant - RECEPTACLE 2 Pushbutton - Eaton - PUSHBUTTON-M22 1 Breaker acc - Eaton - BKR-GHC 1 Relay - Eaton - D26_6-8P 2 Relay - TE Connectivity - R10 1 Diode - NTE Electronics - DIODE 2 Resistor - Power - OHMITE - RESISTOR-ADJ 2 Light - Eaton - E22-RESISTOR 1 Capacitor - Power - Sprague - CAPACITOR-W 1 Switch, Test - ABB - FT-1-PLUG
Structure	3	Cell, 50kA Arc Resistant Switchgear IEEE Type 2B, 5kV 1200 A	1 Arc Duct (Up to 4 feet) with End Louver for Ampgard Arc Gear 1 Upper Sectionalizing Bus 1200A 1 Upper Vertical Bus 1200A 1 Coordination to AmpGard MCC's 1200 Amps

Project Name: Linde Phoenix AZ TSMC Phases
AP21-1+ 5
General Order No:
Bid Date 9/30/2026

Negotiation No: RH130721X6K2
Alternate No: 0005
Est. Purchase Date: 9/30/2026

Structure

- 1 Two 50kA Arc Ducts (Up to 4 feet each) with End Louvers
- 1 Arc Duct Coordination
- 1 Direct Roll In Breaker
- 3 Floor plate (indoor)
- 3 Ground Bus plating
- 3 Epoxy bus supports
- 1 Closed-Door Racking Provision w/ plug - Breaker Compartment
- 1 Closed Door Lockout/Tagout for Breaker Compartments
- 2 Closed Door Lockout/Tagout Tool for Breaker Compartments
- 3 Control Wire Gauge - #14
- 3 Control Wire Color - Gray
- 2 CT Wire Gauge - #10 SIS
- 2 CT Wire Color - Gray
- 1 Ground Wire Gauge - Standard #14
- 1 Ground Wire Color - Green
- 3 Wire Identification
- 3 Control Wire Markers - Sleeved
- 3 Harness Wire Markers - Sleeved
- 3 VW-1 Type Wiring
- 3 Insulated Lock-In Fork wire lugs
- 3 Communication wiring - Fiber Optic
- 2 Short circuit terminal block
- 3 Device nameplate
- 1 Accessories - standard set
- 1 Set of extension rails
- 1 Test jumper
- 1 Levering crank
- 1 Maintenance tool for manually charging the breaker
- 1 Breaker lifting yoke
- 1 Breaker lifting device (Manual Crank)
- 1 Test cabinet, DC
- 1 Electrical levering device
- 1 Freight on Board

Qty List of Materials

- 1 SEL 751001A6X1A7085BD81
- 1 Use incoming main and line side PTs from MRH0010824 for reference
- 3 Cell, 50kA Arc Resistant Switchgear IEEE Type 2B, 5kV 1200 A
- 1 Breaker Compartment 5 VCP-W 50kA 1200A
- 3 CT, single ratio, high accuracy
- 1 Zero Sequence CT, Rect 8x20in ID
- 2 Voltage transformer 5 kV
- 1 Lightning arrester distribution class 6 kV - Set of 3
- 1 Two 50kA Arc Ducts (Up to 4 feet each) with End Louvers
- 1 Arc Duct (Up to 4 feet) with End Louver for Ampgard Arc Gear
- 1 Arc Duct Coordination
- 1 Breaker undervoltage trip
- 1 Direct Roll In Breaker
- 1 MOC switch 9 poles (5a / 4b contacts)
- 1 TOC switch 9 poles (4a / 5b contacts)
- 3 Floor plate (indoor)
- 1 Upper Sectionalizing Bus 1200A
- 1 Upper Vertical Bus 1200A
- 3 Ground Bus plating
- 1 Ground Stud - set

Detail Bill of Material

Project Name: Linde Phoenix AZ TSMC Phases
AP21-1+ 5
General Order No:
Bid Date 9/30/2026

Negotiation No: RH130721X6K2
Alternate No: 0005
Est. Purchase Date: 9/30/2026

Qty List of Materials

- 3 Epoxy bus supports
- 1 Cable lugs, extra sets (1st included)
- 1 Relay Box
- 1 Closed-Door Racking Provision w/ plug - Breaker Compartment
- 1 Closed-Door Racking Provision w/ plug - VT Compartment
- 1 Closed Door Breaker Position Indication
- 1 Closed Door Lockout/Tagout for Breaker Compartments
- 2 Closed Door Lockout/Tagout Tool for Breaker Compartments
- 3 Control Wire Gauge - #14
- 3 Control Wire Color - Gray
- 2 CT Wire Gauge - #10 SIS
- 2 CT Wire Color - Gray
- 1 Ground Wire Gauge - Standard #14
- 1 Ground Wire Color - Green
- 3 Wire Identification
- 3 Control Wire Markers - Sleeved
- 3 Harness Wire Markers - Sleeved
- 3 VW-1 Type Wiring
- 3 Insulated Lock-In Fork wire lugs
- 3 Communication wiring - Fiber Optic
- 2 Short circuit terminal block
- 3 Device nameplate
- 1 Door-Mounted Duplex Receptacle
- 1 Coordination to AmpGard MCC's 1200 Amps
- 1 Breaker acc - Eaton - BKR-GHC
- 1 Capacitor - Power - Sprague - CAPACITOR-W
- 1 Breaker Control Switch, Electroswitch Series 24
- 1 M22 LED Push-To-Test light assembly, qty 2 (red & green)
- 1 MCCB protection for common motor and close, separate trip ckts
- 1 Diode - NTE Electronics - DIODE
- 1 Fuse and Fuse Block & Holder - Eaton - FUSE-PULL20-2
- 1 Fuse and Fuse Block & Holder - Eaton - FUSE-PULL30-2
- 2 Light - Eaton - E22-RESISTOR
- 1 Accessories - standard set
- 1 Maintenance tool for manually charging the breaker
- 1 Levering crank
- 1 Test jumper
- 1 Breaker lifting yoke
- 1 Set of extension rails
- 1 Breaker lifting device (Manual Crank)
- 1 Test cabinet, DC
- 1 Electrical levering device
- 1 Freight on Board
- 1 Meter - Crompton - VOLT-STD-AC-007
- 1 Meter - Crompton - AMM-STD-AC-007
- 2 Pushbutton - Eaton - PUSHBUTTON-M22
- 1 Receptacle - Bryant - RECEPTACLE
- 2 Relay - TE Connectivity - R10
- 1 Relay - Eaton - D26_6-8P
- 1 Relay - Lockout - Electroswitch - LOR-24
- 1 Relay - Protective - Schweitzer Engineering Lab - SEL-751
- 2 Resistor - Power - OHMITE - RESISTOR-ADJ
- 1 Switch, Selector - Electroswitch - 24-BKR-CNTL
- 1 SWITCH, SELECTOR - Electroswitch - 24-VOLT
- 1 Switch, Selector - Electroswitch - 24-AMM
- 1 Switch, Selector - Eaton - ARM-SWITCH-ASSY
- 1 Switch, Test - ABB - FT-1-PLUG
- 1 Switch, Test - ABB - FT-1
- 1 Total Freight Price

Project Name: Linde Phoenix AZ TSMC Phases
AP21-1+ 5
General Order No:
Bid Date 9/30/2026

Negotiation No: RH130721X6K2
Alternate No: 0005
Est. Purchase Date: 9/30/2026

Item No.	Qty	Product	Description
	1	Medium Voltage Assemblies	Medium Voltage Assemblies, 4160V, 3-Phase, 3-Wire, 60 Hertz, 50 kA, 1200 Amps Main Bus Rating
		Designation	16-ES9486.1A
Structure	1	Cell, 50kA Arc Resistant Switchgear IEEE Type 2B, 5kV 1200 A	
	D	Compartment - Voltage transformer 5 kV	1 Closed-Door Racking Provision w/ plug - VT Compartment
	B	Compartment - Unable to find the Price Table	1 Blank -- Comp B 1 Meter - Crompton - VOLT-STD-AC-007 1 SWITCH, SELECTOR - Electroschwitch - 24-VOLT
Structure	2	Cell, 50kA Arc Resistant Switchgear IEEE Type 2B, 5kV 1200 A	1 Lightning arrester distribution class 6 kV - Set of 3 1 Ground Stud - set 1 Cable lugs, extra sets (1st included) 1 Door-Mounted Duplex Receptacle
	D	Compartment - Breaker Compartment 5 VCP-W 50kA 1200A	1 Zero Sequence CT, Rect 8x20in ID 3 CT, single ratio, high accuracy 1 Breaker undervoltage trip 1 MOC switch 9 poles (5a / 4b contacts) 1 TOC switch 9 poles (4a / 5b contacts) 1 Relay Box 1 Closed Door Breaker Position Indication 1 Breaker Control Switch, Electroschwitch Series 24 1 M22 LED Push-To-Test light assembly, qty 2 (red & green) 1 MCCB protection for common motor and close, separate trip ckts
	B	Compartment - Unable to find the Price Table	1 Blank -- Comp B 1 Relay - Protective - Schweitzer Engineering Lab - SEL-751 1 Switch, Test - ABB - FT-1 1 Switch, Selector - Eaton - ARM-SWITCH-ASSY 1 Switch, Selector - Electroschwitch - 24-AMM 1 Meter - Crompton - AMM-STD-AC-007 1 Relay - Lockout - Electroschwitch - LOR-24 1 Receptacle - Bryant - RECEPTACLE 2 Pushbutton - Eaton - PUSHBUTTON-M22 1 Breaker acc - Eaton - BKR-GHC 1 Relay - Eaton - D26_6-8P 2 Relay - TE Connectivity - R10 1 Diode - NTE Electronics - DIODE 2 Resistor - Power - OHMITE - RESISTOR-ADJ 2 Light - Eaton - E22-RESISTOR 1 Capacitor - Power - Sprague - CAPACITOR-W 1 Switch, Test - ABB - FT-1-PLUG
Structure	3	Cell, 50kA Arc Resistant Switchgear IEEE Type 2B, 5kV 1200 A	1 Arc Duct (Up to 4 feet) with End Louver for Ampgard Arc Gear 1 Upper Sectionalizing Bus 1200A 1 Upper Vertical Bus 1200A 1 Coordination to AmpGard MCC's 1200 Amps

Project Name: Linde Phoenix AZ TSMC Phases
AP21-1+ 5
General Order No:
Bid Date 9/30/2026

Negotiation No: RH130721X6K2
Alternate No: 0005
Est. Purchase Date: 9/30/2026

Structure

1 Two 50kA Arc Ducts (Up to 4 feet each) with End Louvers
1 Arc Duct Coordination
1 Direct Roll In Breaker
3 Floor plate (indoor)
3 Ground Bus plating
3 Epoxy bus supports
1 Closed-Door Racking Provision w/ plug - Breaker Compartment
1 Closed Door Lockout/Tagout for Breaker Compartments
2 Closed Door Lockout/Tagout Tool for Breaker Compartments
3 Control Wire Gauge - #14
3 Control Wire Color - Gray
2 CT Wire Gauge - #10 SIS
2 CT Wire Color - Gray
1 Ground Wire Gauge - Standard #14
1 Ground Wire Color - Green
3 Wire Identification
3 Control Wire Markers - Sleeved
3 Harness Wire Markers - Sleeved
3 VW-1 Type Wiring
3 Insulated Lock-In Fork wire lugs
3 Communication wiring - Fiber Optic
2 Short circuit terminal block
3 Device nameplate
1 Accessories - standard set
1 Set of extension rails
1 Test jumper
1 Levering crank
1 Maintenance tool for manually charging the breaker
1 Breaker lifting yoke
1 Breaker lifting device (Manual Crank)
1 Test cabinet, DC
1 Electrical levering device
1 Freight on Board

Qty List of Materials

1 SEL 751001A6X1A7085BD81
1 Use incoming main and line side PTs from MRH0010824 for reference
3 Cell, 50kA Arc Resistant Switchgear IEEE Type 2B, 5kV 1200 A
1 Breaker Compartment 5 VCP-W 50kA 1200A
3 CT, single ratio, high accuracy
1 Zero Sequence CT, Rect 8x20in ID
2 Voltage transformer 5 kV
1 Lightning arrester distribution class 6 kV - Set of 3
1 Two 50kA Arc Ducts (Up to 4 feet each) with End Louvers
1 Arc Duct (Up to 4 feet) with End Louver for Ampgard Arc Gear
1 Arc Duct Coordination
1 Breaker undervoltage trip
1 Direct Roll In Breaker
1 MOC switch 9 poles (5a / 4b contacts)
1 TOC switch 9 poles (4a / 5b contacts)
3 Floor plate (indoor)
1 Upper Sectionalizing Bus 1200A
1 Upper Vertical Bus 1200A
3 Ground Bus plating
1 Ground Stud - set

Detail Bill of Material

Project Name: Linde Phoenix AZ TSMC Phases
AP21-1+ 5
General Order No:
Bid Date 9/30/2026

Negotiation No: RH130721X6K2
Alternate No: 0005
Est. Purchase Date: 9/30/2026

Qty List of Materials

- 3 Epoxy bus supports
- 1 Cable lugs, extra sets (1st included)
- 1 Relay Box
- 1 Closed-Door Racking Provision w/ plug - Breaker Compartment
- 1 Closed-Door Racking Provision w/ plug - VT Compartment
- 1 Closed Door Breaker Position Indication
- 1 Closed Door Lockout/Tagout for Breaker Compartments
- 2 Closed Door Lockout/Tagout Tool for Breaker Compartments
- 3 Control Wire Gauge - #14
- 3 Control Wire Color - Gray
- 2 CT Wire Gauge - #10 SIS
- 2 CT Wire Color - Gray
- 1 Ground Wire Gauge - Standard #14
- 1 Ground Wire Color - Green
- 3 Wire Identification
- 3 Control Wire Markers - Sleeved
- 3 Harness Wire Markers - Sleeved
- 3 VW-1 Type Wiring
- 3 Insulated Lock-In Fork wire lugs
- 3 Communication wiring - Fiber Optic
- 2 Short circuit terminal block
- 3 Device nameplate
- 1 Door-Mounted Duplex Receptacle
- 1 Coordination to AmpGard MCC's 1200 Amps
- 1 Breaker acc - Eaton - BKR-GHC
- 1 Capacitor - Power - Sprague - CAPACITOR-W
- 1 Breaker Control Switch, Electroswitch Series 24
- 1 M22 LED Push-To-Test light assembly, qty 2 (red & green)
- 1 MCCB protection for common motor and close, separate trip ckts
- 1 Diode - NTE Electronics - DIODE
- 1 Fuse and Fuse Block & Holder - Eaton - FUSE-PULL20-2
- 1 Fuse and Fuse Block & Holder - Eaton - FUSE-PULL30-2
- 2 Light - Eaton - E22-RESISTOR
- 1 Accessories - standard set
- 1 Maintenance tool for manually charging the breaker
- 1 Levering crank
- 1 Test jumper
- 1 Breaker lifting yoke
- 1 Set of extension rails
- 1 Breaker lifting device (Manual Crank)
- 1 Test cabinet, DC
- 1 Electrical levering device
- 1 Freight on Board
- 1 Meter - Crompton - VOLT-STD-AC-007
- 1 Meter - Crompton - AMM-STD-AC-007
- 2 Pushbutton - Eaton - PUSHBUTTON-M22
- 1 Receptacle - Bryant - RECEPTACLE
- 2 Relay - TE Connectivity - R10
- 1 Relay - Eaton - D26_6-8P
- 1 Relay - Lockout - Electroswitch - LOR-24
- 1 Relay - Protective - Schweitzer Engineering Lab - SEL-751
- 2 Resistor - Power - OHMITE - RESISTOR-ADJ
- 1 Switch, Selector - Electroswitch - 24-BKR-CNTL
- 1 SWITCH, SELECTOR - Electroswitch - 24-VOLT
- 1 Switch, Selector - Electroswitch - 24-AMM
- 1 Switch, Selector - Eaton - ARM-SWITCH-ASSY
- 1 Switch, Test - ABB - FT-1-PLUG
- 1 Switch, Test - ABB - FT-1
- 1 Total Freight Price

Project Name: Linde Phoenix AZ TSMC Phases
AP21-1+ 5
General Order No:
Bid Date 9/30/2026

Negotiation No: RH130721X6K2
Alternate No: 0005
Est. Purchase Date: 9/30/2026

Item No.	Qty	Product	Description
	1	Medium Voltage Assemblies	Medium Voltage Assemblies, 4160V, 3-Phase, 3-Wire, 60 Hertz, 50 kA, 1200 Amps Main Bus Rating
		Designation	16-ES9486.1B
Structure	1	Cell, 50kA Arc Resistant Switchgear IEEE Type 2B, 5kV 1200 A	
	D	Compartment - Voltage transformer 5 kV	1 Closed-Door Racking Provision w/ plug - VT Compartment
	B	Compartment - Unable to find the Price Table	1 Blank -- Comp B 1 Meter - Crompton - VOLT-STD-AC-007 1 SWITCH, SELECTOR - Electroschwitch - 24-VOLT
Structure	2	Cell, 50kA Arc Resistant Switchgear IEEE Type 2B, 5kV 1200 A	1 Lightning arrester distribution class 6 kV - Set of 3 1 Ground Stud - set 1 Cable lugs, extra sets (1st included) 1 Door-Mounted Duplex Receptacle
	D	Compartment - Breaker Compartment 5 VCP-W 50kA 1200A	1 Zero Sequence CT, Rect 8x20in ID 3 CT, single ratio, high accuracy 1 Breaker undervoltage trip 1 MOC switch 9 poles (5a / 4b contacts) 1 TOC switch 9 poles (4a / 5b contacts) 1 Relay Box 1 Closed Door Breaker Position Indication 1 Breaker Control Switch, Electroschwitch Series 24 1 M22 LED Push-To-Test light assembly, qty 2 (red & green) 1 MCCB protection for common motor and close, separate trip ckts
	B	Compartment - Unable to find the Price Table	1 Blank -- Comp B 1 Relay - Protective - Schweitzer Engineering Lab - SEL-751 1 Switch, Test - ABB - FT-1 1 Switch, Selector - Eaton - ARM-SWITCH-ASSY 1 Switch, Selector - Electroschwitch - 24-AMM 1 Meter - Crompton - AMM-STD-AC-007 1 Relay - Lockout - Electroschwitch - LOR-24 1 Receptacle - Bryant - RECEPTACLE 2 Pushbutton - Eaton - PUSHBUTTON-M22 1 Breaker acc - Eaton - BKR-GHC 1 Relay - Eaton - D26_6-8P 2 Relay - TE Connectivity - R10 1 Diode - NTE Electronics - DIODE 2 Resistor - Power - OHMITE - RESISTOR-ADJ 2 Light - Eaton - E22-RESISTOR 1 Capacitor - Power - Sprague - CAPACITOR-W 1 Switch, Test - ABB - FT-1-PLUG
Structure	3	Cell, 50kA Arc Resistant Switchgear IEEE Type 2B, 5kV 1200 A	1 Arc Duct (Up to 4 feet) with End Louver for Ampgard Arc Gear 1 Upper Sectionalizing Bus 1200A 1 Upper Vertical Bus 1200A 1 Coordination to AmpGard MCC's 1200 Amps

Project Name: Linde Phoenix AZ TSMC Phases
AP21-1+ 5
General Order No:
Bid Date 9/30/2026

Negotiation No: RH130721X6K2
Alternate No: 0005
Est. Purchase Date: 9/30/2026

Structure

1 Two 50kA Arc Ducts (Up to 4 feet each) with End Louvers
1 Arc Duct Coordination
1 Direct Roll In Breaker
3 Floor plate (indoor)
3 Ground Bus plating
3 Epoxy bus supports
1 Closed-Door Racking Provision w/ plug - Breaker Compartment
1 Closed Door Lockout/Tagout for Breaker Compartments
2 Closed Door Lockout/Tagout Tool for Breaker Compartments
3 Control Wire Gauge - #14
3 Control Wire Color - Gray
2 CT Wire Gauge - #10 SIS
2 CT Wire Color - Gray
1 Ground Wire Gauge - Standard #14
1 Ground Wire Color - Green
3 Wire Identification
3 Control Wire Markers - Sleeved
3 Harness Wire Markers - Sleeved
3 VW-1 Type Wiring
3 Insulated Lock-In Fork wire lugs
3 Communication wiring - Fiber Optic
2 Short circuit terminal block
3 Device nameplate
1 Accessories - standard set
1 Set of extension rails
1 Test jumper
1 Levering crank
1 Maintenance tool for manually charging the breaker
1 Breaker lifting yoke
1 Breaker lifting device (Manual Crank)
1 Test cabinet, DC
1 Electrical levering device
1 Freight on Board

Qty List of Materials

1 SEL 751001A6X1A7085BD81
1 Use incoming main and line side PTs from MRH0010824 for reference
3 Cell, 50kA Arc Resistant Switchgear IEEE Type 2B, 5kV 1200 A
1 Breaker Compartment 5 VCP-W 50kA 1200A
3 CT, single ratio, high accuracy
1 Zero Sequence CT, Rect 8x20in ID
2 Voltage transformer 5 kV
1 Lightning arrester distribution class 6 kV - Set of 3
1 Two 50kA Arc Ducts (Up to 4 feet each) with End Louvers
1 Arc Duct (Up to 4 feet) with End Louver for Ampgard Arc Gear
1 Arc Duct Coordination
1 Breaker undervoltage trip
1 Direct Roll In Breaker
1 MOC switch 9 poles (5a / 4b contacts)
1 TOC switch 9 poles (4a / 5b contacts)
3 Floor plate (indoor)
1 Upper Sectionalizing Bus 1200A
1 Upper Vertical Bus 1200A
3 Ground Bus plating
1 Ground Stud - set

Detail Bill of Material

Project Name: Linde Phoenix AZ TSMC Phases
AP21-1+ 5
General Order No:
Bid Date 9/30/2026

Negotiation No: RH130721X6K2
Alternate No: 0005
Est. Purchase Date: 9/30/2026

Qty List of Materials

- 3 Epoxy bus supports
- 1 Cable lugs, extra sets (1st included)
- 1 Relay Box
- 1 Closed-Door Racking Provision w/ plug - Breaker Compartment
- 1 Closed-Door Racking Provision w/ plug - VT Compartment
- 1 Closed Door Breaker Position Indication
- 1 Closed Door Lockout/Tagout for Breaker Compartments
- 2 Closed Door Lockout/Tagout Tool for Breaker Compartments
- 3 Control Wire Gauge - #14
- 3 Control Wire Color - Gray
- 2 CT Wire Gauge - #10 SIS
- 2 CT Wire Color - Gray
- 1 Ground Wire Gauge - Standard #14
- 1 Ground Wire Color - Green
- 3 Wire Identification
- 3 Control Wire Markers - Sleeved
- 3 Harness Wire Markers - Sleeved
- 3 VW-1 Type Wiring
- 3 Insulated Lock-In Fork wire lugs
- 3 Communication wiring - Fiber Optic
- 2 Short circuit terminal block
- 3 Device nameplate
- 1 Door-Mounted Duplex Receptacle
- 1 Coordination to AmpGard MCC's 1200 Amps
- 1 Breaker acc - Eaton - BKR-GHC
- 1 Capacitor - Power - Sprague - CAPACITOR-W
- 1 Breaker Control Switch, Electroswitch Series 24
- 1 M22 LED Push-To-Test light assembly, qty 2 (red & green)
- 1 MCCB protection for common motor and close, separate trip ckts
- 1 Diode - NTE Electronics - DIODE
- 1 Fuse and Fuse Block & Holder - Eaton - FUSE-PULL20-2
- 1 Fuse and Fuse Block & Holder - Eaton - FUSE-PULL30-2
- 2 Light - Eaton - E22-RESISTOR
- 1 Accessories - standard set
- 1 Maintenance tool for manually charging the breaker
- 1 Levering crank
- 1 Test jumper
- 1 Breaker lifting yoke
- 1 Set of extension rails
- 1 Breaker lifting device (Manual Crank)
- 1 Test cabinet, DC
- 1 Electrical levering device
- 1 Freight on Board
- 1 Meter - Crompton - VOLT-STD-AC-007
- 1 Meter - Crompton - AMM-STD-AC-007
- 2 Pushbutton - Eaton - PUSHBUTTON-M22
- 1 Receptacle - Bryant - RECEPTACLE
- 2 Relay - TE Connectivity - R10
- 1 Relay - Eaton - D26_6-8P
- 1 Relay - Lockout - Electroswitch - LOR-24
- 1 Relay - Protective - Schweitzer Engineering Lab - SEL-751
- 2 Resistor - Power - OHMITE - RESISTOR-ADJ
- 1 Switch, Selector - Electroswitch - 24-BKR-CNTL
- 1 SWITCH, SELECTOR - Electroswitch - 24-VOLT
- 1 Switch, Selector - Electroswitch - 24-AMM
- 1 Switch, Selector - Eaton - ARM-SWITCH-ASSY
- 1 Switch, Test - ABB - FT-1-PLUG
- 1 Switch, Test - ABB - FT-1
- 1 Total Freight Price

Project Name: Linde Phoenix AZ TSMC Phases
AP21-1+ 5
General Order No:
Bid Date 9/30/2026

Negotiation No: RH130721X6K2
Alternate No: 0005
Est. Purchase Date: 9/30/2026

Item No.	Qty	Product	Description
	1	Medium Voltage Assemblies	Medium Voltage Assemblies, 4160V, 3-Phase, 3-Wire, 60 Hertz, 50 kA, 1200 Amps Main Bus Rating
		Designation	16-ES9486.1C
Structure	1	Cell, 50kA Arc Resistant Switchgear IEEE Type 2B, 5kV 1200 A	
	D	Compartment - Voltage transformer 5 kV	1 Closed-Door Racking Provision w/ plug - VT Compartment
	B	Compartment - Unable to find the Price Table	1 Blank -- Comp B 1 Meter - Crompton - VOLT-STD-AC-007 1 SWITCH, SELECTOR - Electroschwitch - 24-VOLT
Structure	2	Cell, 50kA Arc Resistant Switchgear IEEE Type 2B, 5kV 1200 A	1 Lightning arrester distribution class 6 kV - Set of 3 1 Ground Stud - set 1 Cable lugs, extra sets (1st included) 1 Door-Mounted Duplex Receptacle
	D	Compartment - Breaker Compartment 5 VCP-W 50kA 1200A	1 Zero Sequence CT, Rect 8x20in ID 3 CT, single ratio, high accuracy 1 Breaker undervoltage trip 1 MOC switch 9 poles (5a / 4b contacts) 1 TOC switch 9 poles (4a / 5b contacts) 1 Relay Box 1 Closed Door Breaker Position Indication 1 Breaker Control Switch, Electroschwitch Series 24 1 M22 LED Push-To-Test light assembly, qty 2 (red & green) 1 MCCB protection for common motor and close, separate trip ckts
	B	Compartment - Unable to find the Price Table	1 Blank -- Comp B 1 Relay - Protective - Schweitzer Engineering Lab - SEL-751 1 Switch, Test - ABB - FT-1 1 Switch, Selector - Eaton - ARM-SWITCH-ASSY 1 Switch, Selector - Electroschwitch - 24-AMM 1 Meter - Crompton - AMM-STD-AC-007 1 Relay - Lockout - Electroschwitch - LOR-24 1 Receptacle - Bryant - RECEPTACLE 2 Pushbutton - Eaton - PUSHBUTTON-M22 1 Breaker acc - Eaton - BKR-GHC 1 Relay - Eaton - D26_6-8P 2 Relay - TE Connectivity - R10 1 Diode - NTE Electronics - DIODE 2 Resistor - Power - OHMITE - RESISTOR-ADJ 2 Light - Eaton - E22-RESISTOR 1 Capacitor - Power - Sprague - CAPACITOR-W 1 Switch, Test - ABB - FT-1-PLUG
Structure	3	Cell, 50kA Arc Resistant Switchgear IEEE Type 2B, 5kV 1200 A	1 Arc Duct (Up to 4 feet) with End Louver for Ampgard Arc Gear 1 Upper Sectionalizing Bus 1200A 1 Upper Vertical Bus 1200A 1 Coordination to AmpGard MCC's 1200 Amps

Project Name: Linde Phoenix AZ TSMC Phases
AP21-1+ 5

General Order No:

Bid Date 9/30/2026

Negotiation No: RH130721X6K2

Alternate No: 0005

Est. Purchase Date: 9/30/2026

Structure

- 1 Two 50kA Arc Ducts (Up to 4 feet each) with End Louvers
- 1 Arc Duct Coordination
- 1 Direct Roll In Breaker
- 3 Floor plate (indoor)
- 3 Ground Bus plating
- 3 Epoxy bus supports
- 1 Closed-Door Racking Provision w/ plug - Breaker Compartment
- 1 Closed Door Lockout/Tagout for Breaker Compartments
- 2 Closed Door Lockout/Tagout Tool for Breaker Compartments
- 3 Control Wire Gauge - #14
- 3 Control Wire Color - Gray
- 2 CT Wire Gauge - #10 SIS
- 2 CT Wire Color - Gray
- 1 Ground Wire Gauge - Standard #14
- 1 Ground Wire Color - Green
- 3 Wire Identification
- 3 Control Wire Markers - Sleeved
- 3 Harness Wire Markers - Sleeved
- 3 VW-1 Type Wiring
- 3 Insulated Lock-In Fork wire lugs
- 3 Communication wiring - Fiber Optic
- 2 Short circuit terminal block
- 3 Device nameplate
- 1 Accessories - standard set
- 1 Set of extension rails
- 1 Test jumper
- 1 Levering crank
- 1 Maintenance tool for manually charging the breaker
- 1 Breaker lifting yoke
- 1 Breaker lifting device (Manual Crank)
- 1 Test cabinet, DC
- 1 Electrical levering device
- 1 Freight on Board

Qty List of Materials

- 1 SEL 751001A6X1A7085BD81
- 1 Use incoming main and line side PTs from MRH0010824 for reference
- 3 Cell, 50kA Arc Resistant Switchgear IEEE Type 2B, 5kV 1200 A
- 1 Breaker Compartment 5 VCP-W 50kA 1200A
- 3 CT, single ratio, high accuracy
- 1 Zero Sequence CT, Rect 8x20in ID
- 2 Voltage transformer 5 kV
- 1 Lightning arrester distribution class 6 kV - Set of 3
- 1 Two 50kA Arc Ducts (Up to 4 feet each) with End Louvers
- 1 Arc Duct (Up to 4 feet) with End Louver for Ampgard Arc Gear
- 1 Arc Duct Coordination
- 1 Breaker undervoltage trip
- 1 Direct Roll In Breaker
- 1 MOC switch 9 poles (5a / 4b contacts)
- 1 TOC switch 9 poles (4a / 5b contacts)
- 3 Floor plate (indoor)
- 1 Upper Sectionalizing Bus 1200A
- 1 Upper Vertical Bus 1200A
- 3 Ground Bus plating
- 1 Ground Stud - set

Detail Bill of Material

Project Name: Linde Phoenix AZ TSMC Phases
AP21-1+ 5
General Order No:
Bid Date 9/30/2026

Negotiation No: RH130721X6K2
Alternate No: 0005
Est. Purchase Date: 9/30/2026

Qty List of Materials

- 3 Epoxy bus supports
- 1 Cable lugs, extra sets (1st included)
- 1 Relay Box
- 1 Closed-Door Racking Provision w/ plug - Breaker Compartment
- 1 Closed-Door Racking Provision w/ plug - VT Compartment
- 1 Closed Door Breaker Position Indication
- 1 Closed Door Lockout/Tagout for Breaker Compartments
- 2 Closed Door Lockout/Tagout Tool for Breaker Compartments
- 3 Control Wire Gauge - #14
- 3 Control Wire Color - Gray
- 2 CT Wire Gauge - #10 SIS
- 2 CT Wire Color - Gray
- 1 Ground Wire Gauge - Standard #14
- 1 Ground Wire Color - Green
- 3 Wire Identification
- 3 Control Wire Markers - Sleeved
- 3 Harness Wire Markers - Sleeved
- 3 VW-1 Type Wiring
- 3 Insulated Lock-In Fork wire lugs
- 3 Communication wiring - Fiber Optic
- 2 Short circuit terminal block
- 3 Device nameplate
- 1 Door-Mounted Duplex Receptacle
- 1 Coordination to AmpGard MCC's 1200 Amps
- 1 Breaker acc - Eaton - BKR-GHC
- 1 Capacitor - Power - Sprague - CAPACITOR-W
- 1 Breaker Control Switch, Electroswitch Series 24
- 1 M22 LED Push-To-Test light assembly, qty 2 (red & green)
- 1 MCCB protection for common motor and close, separate trip ckts
- 1 Diode - NTE Electronics - DIODE
- 1 Fuse and Fuse Block & Holder - Eaton - FUSE-PULL20-2
- 1 Fuse and Fuse Block & Holder - Eaton - FUSE-PULL30-2
- 2 Light - Eaton - E22-RESISTOR
- 1 Accessories - standard set
- 1 Maintenance tool for manually charging the breaker
- 1 Levering crank
- 1 Test jumper
- 1 Breaker lifting yoke
- 1 Set of extension rails
- 1 Breaker lifting device (Manual Crank)
- 1 Test cabinet, DC
- 1 Electrical levering device
- 1 Freight on Board
- 1 Meter - Crompton - VOLT-STD-AC-007
- 1 Meter - Crompton - AMM-STD-AC-007
- 2 Pushbutton - Eaton - PUSHBUTTON-M22
- 1 Receptacle - Bryant - RECEPTACLE
- 2 Relay - TE Connectivity - R10
- 1 Relay - Eaton - D26_6-8P
- 1 Relay - Lockout - Electroswitch - LOR-24
- 1 Relay - Protective - Schweitzer Engineering Lab - SEL-751
- 2 Resistor - Power - OHMITE - RESISTOR-ADJ
- 1 Switch, Selector - Electroswitch - 24-BKR-CNTL
- 1 SWITCH, SELECTOR - Electroswitch - 24-VOLT
- 1 Switch, Selector - Electroswitch - 24-AMM
- 1 Switch, Selector - Eaton - ARM-SWITCH-ASSY
- 1 Switch, Test - ABB - FT-1-PLUG
- 1 Switch, Test - ABB - FT-1
- 1 Total Freight Price

Detail Bill of Material

Project Name: Linde Phoenix AZ TSMC Phases
AP21-1+ 5
General Order No:
Bid Date 9/30/2026

Negotiation No: RH130721X6K2
Alternate No: 0005
Est. Purchase Date: 9/30/2026

Item No.	Qty	Product	Description
	1	Ampgard	MVD Witness Test

Catalog No MVD Witness Test
Designation 3-days WT

Item No.	Qty	Product	Description
	1	Medium Voltage Drive	MVC2 Spare Parts

Designation MVD SPARES

Qty List of Materials

- 1 400A Aux Interlock 2NO 2NC
- 1 400A Circuit Board
- 1 Primary fuse kit, 100% spares matching the qty of each size and type used
- 1 Secondary fuse kit, 10 of each size and type used
- 1 Main Fuse 5KV 350E KIT OF 3
- 1 Main Fuse 5KV 36R KIT OF 3

Item No.	Qty	Product	Description
	1	Medium Voltage Drive	Ampgard Medium Voltage Motor Control, Ampgard AR-50kA, 4160V, 60 Hertz, 1200 Amps Main bus.

Designation 14-ES9486.1A

Qty List of Materials

- 1 Character Color/Nameplate Color - Black on White
- 1 Warning Labels in English Only
- 1 System BIL is 60kV
- 1 Control Wire Marker - Sleeve Type
- 1 Control Wire Designation: Wire number only
- 1 Internal Control Wiring (to the extent allowed by devices): Locking Fork
- 1 Equipment Rated to work at 40C, 3281FT (1000 M)
- 1 Customer Terminals: Locking Fork
- 1 SEL 710-5 071050E1ABA1A7585A381 code # J6KJ
- 2 4" Filler
- 2 Transition Compartment
- 1 Remote Motor Operator
- 1 similar to LRH0027608
- 1 Grounding Balls(Set of 4)
- 1 Blown Fuse Indicator
- 7 D26 type relays as shown in schematics
- 4 Standard Structure
- 2 VFD Bus - 1000A
- 2 Arc Res-50kA with Common Plenums IEEE C37.20.7-2017
- 6 DC Bus
- 3 PT Bus
- 2 4160V 60Hz 1200A Sleeve Insulated Copper Main Bus, 50ka for 2sec Bracing
- 2 Silver Plated Copper Bus, Complete Bus
- 2 Silver Plated Copper Ground Bus
- 6 Interconnect Wiring Between Structures: Locking Fork

Detail Bill of Material

Project Name: Linde Phoenix AZ TSMC Phases
AP21-1+ 5
General Order No:
Bid Date 9/30/2026

Negotiation No: RH130721X6K2
Alternate No: 0005
Est. Purchase Date: 9/30/2026

Qty	List of Materials
2	Blank Auxiliary Compartment (Cannot be converted to a starter in the future)
2	Contactor With Isolation Switch
1	Main Disconnect
1	4160V 60Hz 1200A Sleeve Insulated Main Bus, 50ka for 2sec Bracing
1	Silver Plated Bus, Complete Bus
4	Silver Plated Ground Bus
1	Drive Structure
1	SC 9000 4160V 60Hz 209A input / 4160V 217 FLA output / 1750HP CT @ 40C
1	Line entry from bus
1	1750HP 217A Std Induction Motor Load @ 0.945 Efficiency
1	Standard 24 Pulse (fan assist) Transformer
1	Constant Torque 150% Overload for 1 minute out of a 10 minute cycle
1	Internal CPT 120vac 2KVA
1	Slot C Voltage Monitor Board
1	SoftMag Precharge
1	Lightning Arrestors, Dist. Type
1	Input Fused Isolation switch with vacuum contactor
1	Kirk Key Interlocks
1	Low Voltage Control Bucket
1	Red-Main Contactor Closed Indicating Light, LED
1	Green-Main Contactor Open Indicating Light, LED
1	Amber-Drive Fault Indicating Light, LED
1	Internal Control Power- 120V CPT
1	Internal 480V transformer for blower power
1	Pump Load Type
1	Sync Transfer Up only, Eaton controls, DV/DT Filter, and 400A Output Contactor
1	Load Cable Entry Top
3	Lug Set: Crimp Type 2 Hole (500kcmil)
4	Lug Set: Crimp Type 2 Hole (#1 AWG)
1	Power Pole Inverter with stab power connections
1	Inverter Structure
1	Inverter
1	Output Filter
1	all structures include Gasketing
1	Arc 50kA Equipment
1	Manufacturing Complexity Code E
1	400A FLA 188-400, SC9000 Sync Transfer, Output CTs
1	Control Voltage 120VAC
1	Main Contactor Drop Out Time 130ms
1	Load Cable Entry Bottom
3	3 Single Phase CTs
1	Starter Isolation Switch
1	Current Limiting Power Fuses
1	Main Contactor Roll-In/Roll-Out
1	Low Voltage Control Compartment
1	Set of Control Circuit Terminal Blocks
1	Interposing Relay 3NO 1NC
1	2KVA CPT
1	30mm (E34) Start/Stop Pushbutton
1	30mm (E34) Red Run/Close Indicating Light, LED
1	30mm (E34) Green Off/Open Indicating Light, LED
1	GFCT 50/5
1	6 Pole CT Shorting Terminal Block (has GFCT terminals)
1	FT1 Test Switch, 4 PT, 3 CT Shorting, Clear Cover
1	Schweitzer 710-5 Protection Relay for Starter

Detail Bill of Material

Project Name: Linde Phoenix AZ TSMC Phases
AP21-1+ 5
General Order No:
Bid Date 9/30/2026

Negotiation No: RH130721X6K2
Alternate No: 0005
Est. Purchase Date: 9/30/2026

Qty	List of Materials
1	Ammeter, AC, Panel Mount, 2% for Starter
1	Ammeter Switch, Electro Switch 24 series for Starter
1	30mm (E34) Test Pushbutton
1	30mm (E34) Stop, Emergency Pushbutton
1	30mm (E34) Reset Pushbutton
1	30mm (E34) White Indicating Light, LED
1	30mm (E34) Blue Indicating Light, LED
1	Total Freight Price

Item No.	Qty	Product	Description
	1	Medium Voltage Drive	Ampgard Medium Voltage Motor Control, Ampgard AR-50kA, 4160V, 60 Hertz, 1200 Amps Main bus.

Designation 14-ES9486.1B

Qty	List of Materials
1	Character Color/Nameplate Color - Black on White
1	Warning Labels in English Only
1	System BIL is 60kV
1	Control Wire Marker - Sleeve Type
1	Control Wire Designation: Wire number only
1	Internal Control Wiring (to the extent allowed by devices): Locking Fork
1	Equipment Rated to work at 40C, 3281FT (1000 M)
1	Customer Terminals: Locking Fork
1	SEL 710-5 071050E1ABA1A7585A381 code # J6KJ
2	4" Filler
2	Transition Compartment
1	Remote Motor Operator
1	similar to LRH0027608
1	Grounding Balls(Set of 4)
1	Blown Fuse Indicator
7	D26 type relays as shown in schematics
4	Standard Structure
2	VFD Bus - 1000A
2	Arc Res-50kA with Common Plenums IEEE C37.20.7-2017
6	DC Bus
3	PT Bus
2	4160V 60Hz 1200A Sleeve Insulated Copper Main Bus, 50ka for 2sec Bracing
2	Silver Plated Copper Bus, Complete Bus
2	Silver Plated Copper Ground Bus
6	Interconnect Wiring Between Structures: Locking Fork
2	Blank Auxiliary Compartment (Cannot be converted to a starter in the future)
2	Contactor With Isolation Switch
1	Main Disconnect
1	4160V 60Hz 1200A Sleeve Insulated Main Bus, 50ka for 2sec Bracing
1	Silver Plated Bus, Complete Bus
4	Silver Plated Ground Bus
1	Drive Structure
1	SC 9000 4160V 60Hz 209A input / 4160V 217 FLA output / 1750HP CT @ 40C
1	Line entry from bus
1	1750HP 217A Std Induction Motor Load @ 0.945 Efficiency

Detail Bill of Material

Project Name: Linde Phoenix AZ TSMC Phases
AP21-1+ 5
General Order No:
Bid Date 9/30/2026

Negotiation No: RH130721X6K2
Alternate No: 0005
Est. Purchase Date: 9/30/2026

Qty	List of Materials
1	Standard 24 Pulse (fan assist) Transformer
1	Constant Torque 150% Overload for 1 minute out of a 10 minute cycle
1	Internal CPT120vac 2KVA
1	Slot C Voltage Monitor Board
1	SoftMag Precharge
1	Lightning Arrestors, Dist. Type
1	Input Fused Isolation switch with vacuum contactor
1	Kirk Key Interlocks
1	Low Voltage Control Bucket
1	Red-Main Contactor Closed Indicating Light, LED
1	Green-Main Contactor Open Indicating Light, LED
1	Amber-Drive Fault Indicating Light, LED
1	Internal Control Power- 120V CPT
1	Internal 480V transformer for blower power
1	Pump Load Type
1	Sync Transfer Up only, Eaton controls, DV/DT Filter, and 400A Output Contactor
1	Load Cable Entry Top
3	Lug Set: Crimp Type 2 Hole (500kcmil)
4	Lug Set: Crimp Type 2 Hole (#1 AWG)
1	Power Pole Inverter with stab power connections
1	Inverter Structure
1	Inverter
1	Output Filter
1	all structures include Gasketing
1	Arc 50kA Equipment
1	Manufacturing Complexity Code E
1	400A FLA 188-400, SC9000 Sync Transfer, Output CTs
1	Control Voltage 120VAC
1	Main Contactor Drop Out Time 130ms
1	Load Cable Entry Bottom
3	3 Single Phase CTs
1	Starter Isolation Switch
1	Current Limiting Power Fuses
1	Main Contactor Roll-In/Roll-Out
1	Low Voltage Control Compartment
1	Set of Control Circuit Terminal Blocks
1	Interposing Relay 3NO 1NC
1	2KVA CPT
1	30mm (E34) Start/Stop Pushbutton
1	30mm (E34) Red Run/Close Indicating Light, LED
1	30mm (E34) Green Off/Open Indicating Light, LED
1	GFCT 50/5
1	6 Pole CT Shorting Terminal Block (has GFCT terminals)
1	FT1 Test Switch, 4 PT, 3 CT Shorting, Clear Cover
1	Schweitzer 710-5 Protection Relay for Starter
1	Ammeter, AC, Panel Mount, 2% for Starter
1	Ammeter Switch, Electro Switch 24 series for Starter
1	30mm (E34) Test Pushbutton
1	30mm (E34) Stop, Emergency Pushbutton
1	30mm (E34) Reset Pushbutton
1	30mm (E34) White Indicating Light, LED
1	30mm (E34) Blue Indicating Light, LED
1	Total Freight Price

Detail Bill of Material

Project Name:	Linde Phoenix AZ TSMC Phases AP21-1+ 5	Negotiation No:	RH130721X6K2
General Order No:		Alternate No:	0005
Bid Date	9/30/2026	Est. Purchase Date:	9/30/2026

Item No.	Qty	Product	Description
	1	Medium Voltage Drive	Ampgard Medium Voltage Motor Control, Ampgard AR-50kA, 4160V, 60 Hertz, 1200 Amps Main bus.

Designation 14-ES9486.1C

Qty List of Materials

- 1 Character Color/Nameplate Color - Black on White
- 1 Warning Labels in English Only
- 1 System BIL is 60kV
- 1 Control Wire Marker - Sleeve Type
- 1 Control Wire Designation: Wire number only
- 1 Internal Control Wiring (to the extent allowed by devices): Locking Fork
- 1 Equipment Rated to work at 40C, 3281FT (1000 M)
- 1 Customer Terminals: Locking Fork
- 1 SEL 710-5 071050E1ABA1A7585A381 code # J6KJ
- 2 4" Filler
- 2 Transition Compartment
- 1 Remote Motor Operator
- 1 similar to LRH0027608
- 1 Grounding Balls(Set of 4)
- 1 Blown Fuse Indicator
- 7 D26 type relays as shown in schematics
- 4 Standard Structure
- 2 VFD Bus - 1000A
- 2 Arc Res-50kA with Common Plenums IEEE C37.20.7-2017
- 6 DC Bus
- 3 PT Bus
- 2 4160V 60Hz 1200A Sleeve Insulated Copper Main Bus, 50ka for 2sec Bracing
- 2 SilverPlated Copper Bus, Complete Bus
- 2 SilverPlated Copper Ground Bus
- 6 Interconnect Wiring Between Structures: Locking Fork
- 2 Blank Auxiliary Compartment (Cannot be converted to a starter in the future)
- 2 Contactor With Isolation Switch
- 1 Main Disconnect
- 1 4160V 60Hz 1200A Sleeve Insulated Main Bus, 50ka for 2sec Bracing
- 1 SilverPlated Bus, Complete Bus
- 4 SilverPlated Ground Bus
- 1 Drive Structure
- 1 SC 9000 4160V 60Hz 209A input / 4160V 217 FLA output / 1750HP CT @ 40C
- 1 Line entry from bus
- 1 1750HP 217A Std Induction Motor Load @ 0.945 Efficiency
- 1 Standard 24 Pulse (fan assist) Transformer
- 1 Constant Torque 150% Overload for 1 minute out of a 10 minute cycle
- 1 Internal CPT120vac 2KVA
- 1 Slot C Voltage Monitor Board
- 1 SoftMag Precharge
- 1 Lightning Arrestors, Dist. Type
- 1 Input Fused Isolation switch with vacuum contactor
- 1 Kirk Key Interlocks
- 1 Low Voltage Control Bucket
- 1 Red-Main Contactor Closed Indicating Light, LED

Detail Bill of Material

Project Name: Linde Phoenix AZ TSMC Phases
AP21-1+ 5
General Order No:
Bid Date 9/30/2026

Negotiation No: RH130721X6K2
Alternate No: 0005
Est. Purchase Date: 9/30/2026

Qty	List of Materials
1	Green-Main Contactor Open Indicating Light, LED
1	Amber-Drive Fault Indicating Light, LED
1	Internal Control Power- 120V CPT
1	Internal 480V transformer for blower power
1	Pump Load Type
1	Sync Transfer Up only, Eaton controls, DV/DT Filter, and 400A Output Contactor
1	Load Cable Entry Top
3	Lug Set: Crimp Type 2 Hole (500kcmil)
4	Lug Set: Crimp Type 2 Hole (#1 AWG)
1	Power Pole Inverter with stab power connections
1	Inverter Structure
1	Inverter
1	Output Filter
1	all structures include Gasketing
1	Manufacturing Complexity Code E
1	Arc 50kA Equipment
1	400A FLA 188-400, SC9000 Sync Transfer, Output CTs
1	Control Voltage 120VAC
1	Main Contactor Drop Out Time 130ms
1	Load Cable Entry Bottom
3	3 Single Phase CTs
1	Starter Isolation Switch
1	Current Limiting Power Fuses
1	Main Contactor Roll-In/Roll-Out
1	Low Voltage Control Compartment
1	Set of Control Circuit Terminal Blocks
1	Interposing Relay 3NO 1NC
1	2KVA CPT
1	30mm (E34) Start/Stop Pushbutton
1	30mm (E34) Red Run/Close Indicating Light, LED
1	30mm (E34) Green Off/Open Indicating Light, LED
1	GFCT 50/5
1	6 Pole CT Shorting Terminal Block (has GFCT terminals)
1	FT1 Test Switch, 4 PT, 3 CT Shorting, Clear Cover
1	Schweitzer 710-5 Protection Relay for Starter
1	Ammeter, AC, Panel Mount, 2% for Starter
1	Ammeter Switch, Electro Switch 24 series for Starter
1	30mm (E34) Test Pushbutton
1	30mm (E34) Stop, Emergency Pushbutton
1	30mm (E34) Reset Pushbutton
1	30mm (E34) White Indicating Light, LED
1	30mm (E34) Blue Indicating Light, LED
1	Total Freight Price

Item No.	Qty	Product	Description
	1	Medium Voltage Drive	Ampgard Medium Voltage Motor Control, Ampgard AR-50kA, 4160V, 60 Hertz, 1200 Amps Main bus.

Designation 16-ES9486.1A

Qty	List of Materials
1	Character Color/Nameplate Color - Black on White
1	Warning Labels in English Only
1	System BIL is 60kV
1	Control Wire Marker - Sleeve Type
1	Control Wire Designation: Wire number only

Detail Bill of Material

Project Name: Linde Phoenix AZ TSMC Phases
AP21-1+ 5
General Order No:
Bid Date 9/30/2026

Negotiation No: RH130721X6K2
Alternate No: 0005
Est. Purchase Date: 9/30/2026

Qty	List of Materials
1	Internal Control Wiring (to the extent allowed by devices): Locking Fork
1	Equipment Rated to work at 40C, 3281FT (1000 M)
1	Customer Terminals: Locking Fork
1	SEL 710-5 071050E1ABA1A7585A381 code # J6KJ
2	4" Filler
2	Transition Compartment
1	Remote Motor Operator
1	similar to LRH0027608
1	Grounding Balls(Set of 4)
1	Blown Fuse Indicator
7	D26 type relays as shown in schematics
4	Standard Structure
2	VFD Bus - 1000A
2	Arc Res-50kA with Common Plenums IEEE C37.20.7-2017
6	DC Bus
3	PT Bus
2	4160V 60Hz 1200A Sleeve Insulated Copper Main Bus, 50ka for 2sec Bracing
2	Silver Plated Copper Bus, Complete Bus
2	Silver Plated Copper Ground Bus
6	Interconnect Wiring Between Structures: Locking Fork
2	Blank Auxiliary Compartment (Cannot be converted to a starter in the future)
2	Contactors With Isolation Switch
1	Main Disconnect
1	4160V 60Hz 1200A Sleeve Insulated Main Bus, 50ka for 2sec Bracing
1	Silver Plated Bus, Complete Bus
4	Silver Plated Ground Bus
1	Drive Structure
1	SC 9000 4160V 60Hz 209A input / 4160V 217 FLA output / 1750HP CT @ 40C
1	Line entry from bus
1	1750HP 217A Std Induction Motor Load @ 0.945 Efficiency
1	Standard 24 Pulse (fan assist) Transformer
1	Constant Torque 150% Overload for 1 minute out of a 10 minute cycle
1	Internal CPT 120vac 2KVA
1	Slot C Voltage Monitor Board
1	SoftMag Precharge
1	Lightning Arrestors, Dist. Type
1	Input Fused Isolation switch with vacuum contactor
1	Kirk Key Interlocks
1	Low Voltage Control Bucket
1	Red-Main Contactor Closed Indicating Light, LED
1	Green-Main Contactor Open Indicating Light, LED
1	Amber-Drive Fault Indicating Light, LED
1	Internal Control Power- 120V CPT
1	Internal 480V transformer for blower power
1	Pump Load Type
1	Sync Transfer Up only, Eaton controls, DV/DT Filter, and 400A Output Contactor
1	Load Cable Entry Top
3	Lug Set: Crimp Type 2 Hole (500kcmil)
4	Lug Set: Crimp Type 2 Hole (#1 AWG)
1	Power Pole Inverter with stab power connections
1	Inverter Structure
1	Inverter
1	Output Filter
1	all structures include Gasketing
1	Manufacturing Complexity Code E

Detail Bill of Material

Project Name: Linde Phoenix AZ TSMC Phases
AP21-1+ 5
General Order No:
Bid Date 9/30/2026

Negotiation No: RH130721X6K2
Alternate No: 0005
Est. Purchase Date: 9/30/2026

Qty	List of Materials
1	Arc 50kA Equipment
1	400A FLA 188-400, SC9000 Sync Transfer, Output CTs
1	Control Voltage 120VAC
1	Main Contactor Drop Out Time 130ms
1	Load Cable Entry Bottom
3	3 Single Phase CTs
1	Starter Isolation Switch
1	Current Limiting Power Fuses
1	Main Contactor Roll-In/Roll-Out
1	Low Voltage Control Compartment
1	Set of Control Circuit Terminal Blocks
1	Interposing Relay 3NO 1NC
1	2KVA CPT
1	30mm (E34) Start/Stop Pushbutton
1	30mm (E34) Red Run/Close Indicating Light, LED
1	30mm (E34) Green Off/Open Indicating Light, LED
1	GFCT 50/5
1	6 Pole CT Shorting Terminal Block (has GFCT terminals)
1	FT1 Test Switch, 4 PT, 3 CT Shorting, Clear Cover
1	Schweitzer 710-5 Protection Relay for Starter
1	Ammeter, AC, Panel Mount, 2% for Starter
1	Ammeter Switch, Electro Switch 24 series for Starter
1	30mm (E34) Test Pushbutton
1	30mm (E34) Stop, Emergency Pushbutton
1	30mm (E34) Reset Pushbutton
1	30mm (E34) White Indicating Light, LED
1	30mm (E34) Blue Indicating Light, LED
1	Total Freight Price

Item No.	Qty	Product	Description
	1	Medium Voltage Drive	Ampgard Medium Voltage Motor Control, Ampgard AR-50kA, 4160V, 60 Hertz, 1200 Amps Main bus.

Designation 16-ES9486.1B

Qty	List of Materials
1	Character Color/Nameplate Color - Black on White
1	Warning Labels in English Only
1	System BIL is 60kV
1	Control Wire Marker - Sleeve Type
1	Control Wire Designation: Wire number only
1	Internal Control Wiring (to the extent allowed by devices): Locking Fork
1	Equipment Rated to work at 40C, 3281FT (1000 M)
1	Customer Terminals: Locking Fork
1	SEL 710-5 071050E1ABA1A7585A381 code # J6KJ
2	4" Filler
2	Transition Compartment
1	Remote Motor Operator
1	similar to LRH0027608
1	Grounding Balls(Set of 4)
1	Blown Fuse Indicator
7	D26 type relays as shown in schematics
4	Standard Structure
2	VFD Bus - 1000A
2	Arc Res-50kA with Common Plenums IEEE C37.20.7-2017
6	DC Bus

Detail Bill of Material

Project Name: Linde Phoenix AZ TSMC Phases
AP21-1+ 5
General Order No:
Bid Date 9/30/2026

Negotiation No: RH130721X6K2
Alternate No: 0005
Est. Purchase Date: 9/30/2026

Qty List of Materials

- 3 PT Bus
- 2 4160V 60Hz 1200A Sleeve Insulated Copper Main Bus, 50ka for 2sec Bracing
- 2 Silver Plated Copper Bus, Complete Bus
- 2 Silver Plated Copper Ground Bus
- 6 Interconnect Wiring Between Structures: Locking Fork
- 2 Blank Auxiliary Compartment (Cannot be converted to a starter in the future)
- 2 Contactor With Isolation Switch
- 1 Main Disconnect
- 1 4160V 60Hz 1200A Sleeve Insulated Main Bus, 50ka for 2sec Bracing
- 1 Silver Plated Bus, Complete Bus
- 4 Silver Plated Ground Bus
- 1 Drive Structure
- 1 SC 9000 4160V 60Hz 209A input / 4160V 217 FLA output / 1750HP CT @ 40C
- 1 Line entry from bus
- 1 1750HP 217A Std Induction Motor Load @ 0.945 Efficiency
- 1 Standard 24 Pulse (fan assist) Transformer
- 1 Constant Torque 150% Overload for 1 minute out of a 10 minute cycle
- 1 Internal CPT 120vac 2KVA
- 1 Slot C Voltage Monitor Board
- 1 SoftMag Precharge
- 1 Lightning Arrestors, Dist. Type
- 1 Input Fused Isolation switch with vacuum contactor
- 1 Kirk Key Interlocks
- 1 Low Voltage Control Bucket
- 1 Red-Main Contactor Closed Indicating Light, LED
- 1 Green-Main Contactor Open Indicating Light, LED
- 1 Amber-Drive Fault Indicating Light, LED
- 1 Internal Control Power- 120V CPT
- 1 Internal 480V transformer for blower power
- 1 Pump Load Type
- 1 Sync Transfer Up only, Eaton controls, DV/DT Filter, and 400A Output Contactor
- 1 Load Cable Entry Top
- 3 Lug Set: Crimp Type 2 Hole (500kcmil)
- 4 Lug Set: Crimp Type 2 Hole (#1 AWG)
- 1 Power Pole Inverter with stab power connections
- 1 Inverter Structure
- 1 Inverter
- 1 Output Filter
- 1 all structures include Gasketing
- 1 Manufacturing Complexity Code E
- 1 Arc 50kA Equipment
- 1 400A FLA 188-400, SC9000 Sync Transfer, Output CTs
- 1 Control Voltage 120VAC
- 1 Main Contactor Drop Out Time 130ms
- 1 Load Cable Entry Bottom
- 3 3 Single Phase CTs
- 1 Starter Isolation Switch
- 1 Current Limiting Power Fuses
- 1 Main Contactor Roll-In/Roll-Out
- 1 Low Voltage Control Compartment
- 1 Set of Control Circuit Terminal Blocks
- 1 Interposing Relay 3NO 1NC
- 1 2KVA CPT
- 1 30mm (E34) Start/Stop Pushbutton
- 1 30mm (E34) Red Run/Close Indicating Light, LED

Detail Bill of Material

Project Name: Linde Phoenix AZ TSMC Phases
AP21-1+ 5
General Order No:
Bid Date 9/30/2026

Negotiation No: RH130721X6K2
Alternate No: 0005
Est. Purchase Date: 9/30/2026

Qty	List of Materials
1	30mm (E34) Green Off/Open Indicating Light, LED
1	GFCT 50/5
1	6 Pole CT Shorting Terminal Block (has GFCT terminals)
1	FT1 Test Switch, 4 PT, 3 CT Shorting, Clear Cover
1	Schweitzer 710-5 Protection Relay for Starter
1	Ammeter, AC, Panel Mount, 2% for Starter
1	Ammeter Switch, Electro Switch 24 series for Starter
1	30mm (E34) Test Pushbutton
1	30mm (E34) Stop, Emergency Pushbutton
1	30mm (E34) Reset Pushbutton
1	30mm (E34) White Indicating Light, LED
1	30mm (E34) Blue Indicating Light, LED
1	Total Freight Price

Item No.	Qty	Product	Description
	1	Medium Voltage Drive	Ampgard Medium Voltage Motor Control, Ampgard AR-50kA, 4160V, 60 Hertz, 1200 Amps Main bus.

Designation 16-ES9486.1C

Qty	List of Materials
1	Character Color/Nameplate Color - Black on White
1	Warning Labels in English Only
1	System BIL is 60kV
1	Control Wire Marker - Sleeve Type
1	Control Wire Designation: Wire number only
1	Internal Control Wiring (to the extent allowed by devices): Locking Fork
1	Equipment Rated to work at 40C, 3281FT (1000 M)
1	Customer Terminals: Locking Fork
1	SEL 710-5 071050E1ABA1A7585A381 code # J6KJ
2	4" Filler
2	Transition Compartment
1	Remote Motor Operator
1	similar to LRH0027608
1	Grounding Balls(Set of 4)
1	Blown Fuse Indicator
7	D26 type relays as shown in schematics
4	Standard Structure
2	VFD Bus - 1000A
2	Arc Res-50kA with Common Plenums IEEE C37.20.7-2017
6	DC Bus
3	PT Bus
2	4160V 60Hz 1200A Sleeve Insulated Copper Main Bus, 50ka for 2sec Bracing
2	SilverPlated Copper Bus, Complete Bus
2	SilverPlated Copper Ground Bus
6	Interconnect Wiring Between Structures: Locking Fork
2	Blank Auxiliary Compartment (Cannot be converted to a starter in the future)
2	Contactor With Isolation Switch
1	Main Disconnect
1	4160V 60Hz 1200A Sleeve Insulated Main Bus, 50ka for 2sec Bracing
1	SilverPlated Bus, Complete Bus

Detail Bill of Material

Project Name: Linde Phoenix AZ TSMC Phases
AP21-1+ 5
General Order No:
Bid Date 9/30/2026

Negotiation No: RH130721X6K2
Alternate No: 0005
Est. Purchase Date: 9/30/2026

Qty	List of Materials
4	Silver Plated Ground Bus
1	Drive Structure
1	SC 9000 4160V 60Hz 209A input / 4160V 217 FLA output / 1750HP CT @ 40C
1	Line entry from bus
1	1750HP 217A Std Induction Motor Load @ 0.945 Efficiency
1	Standard 24 Pulse (fan assist) Transformer
1	Constant Torque 150% Overload for 1 minute out of a 10 minute cycle
1	Internal CPT 120vac 2KVA
1	Slot C Voltage Monitor Board
1	SoftMag Precharge
1	Lightning Arrestors, Dist. Type
1	Input Fused Isolation switch with vacuum contactor
1	Kirk Key Interlocks
1	Low Voltage Control Bucket
1	Red-Main Contactor Closed Indicating Light, LED
1	Green-Main Contactor Open Indicating Light, LED
1	Amber-Drive Fault Indicating Light, LED
1	Internal Control Power- 120V CPT
1	Internal 480V transformer for blower power
1	Pump Load Type
1	Sync Transfer Up only, Eaton controls, DV/DT Filter, and 400A Output Contactor
1	Load Cable Entry Top
3	Lug Set: Crimp Type 2 Hole (500kcmil)
4	Lug Set: Crimp Type 2 Hole (#1 AWG)
1	Power Pole Inverter with stab power connections
1	Inverter Structure
1	Inverter
1	Output Filter
1	all structures include Gasketing
1	Manufacturing Complexity Code E
1	Arc 50kA Equipment
1	400A FLA 188-400, SC9000 Sync Transfer, Output CTs
1	Control Voltage 120VAC
1	Main Contactor Drop Out Time 130ms
1	Load Cable Entry Bottom
3	3 Single Phase CTs
1	Starter Isolation Switch
1	Current Limiting Power Fuses
1	Main Contactor Roll-In/Roll-Out
1	Low Voltage Control Compartment
1	Set of Control Circuit Terminal Blocks
1	Interposing Relay 3NO 1NC
1	2KVA CPT
1	30mm (E34) Start/Stop Pushbutton
1	30mm (E34) Red Run/Close Indicating Light, LED
1	30mm (E34) Green Off/Open Indicating Light, LED
1	GFCT 50/5
1	6 Pole CT Shorting Terminal Block (has GFCT terminals)
1	FT1 Test Switch, 4 PT, 3 CT Shorting, Clear Cover
1	Schweitzer 710-5 Protection Relay for Starter
1	Ammeter, AC, Panel Mount, 2% for Starter
1	Ammeter Switch, Electro Switch 24 series for Starter
1	30mm (E34) Test Pushbutton
1	30mm (E34) Stop, Emergency Pushbutton
1	30mm (E34) Reset Pushbutton

Detail Bill of Material

Project Name: Linde Phoenix AZ TSMC Phases
AP21-1+ 5

General Order No:

Bid Date 9/30/2026

Negotiation No: RH130721X6K2

Alternate No: 0005

Est. Purchase Date: 9/30/2026

Qty List of Materials

1 30mm (E34) White Indicating Light, LED

1 30mm (E34) Blue Indicating Light, LED

1 Total Freight Price

Item No.	Qty	Product	Description
	1	LV Assembly Aftermarket	WITNESS TEST
		Catalog No	WITNESS TEST
		Designation	WITNESS TEST LVA

Item No.	Qty	Product	Description
	1	Low Voltage Assemblies	Magnum PXR Low Voltage Assemblies, EEMAC/Nema 1A, 480/277 wye, 85 kAIC, 3 Wires, 60 Hertz, 4000 Amps Main Bus
		Designation	13-ES9487.1A

Structure

- 1 44in Structure 4000 Amps**
EEMAC/Nema 1A Enclosure
44in ANSI Type 2B Arc Resistant
Arc Plenum
- A Main Metering - 1/2 High Main Metering Compartment**
Current Transformer Ratio 4000:5
SEL-751 Feeder Protection Relay
- E Instruments - 1/2 High Metering Compartment**
- C Breaker - MPS-840 Main, [Drawout/O-E/O], 4000A Magnum PXR Breaker, PXR 25, LSIG**
Typical Qty/Cable size per Ph(N) & G: (11)-500/Ph, 500G
Sensor + Plug (Rated Current In)
4000
PXR25 LSIG w/ ARMs w/ Modbus Trip Unit
Standard Mechanical Lugs
Bell alarm (OTS) Switch - Indicator with 2-Form C Contacts
Brk control Sw: Standard E34 switch with open & closed LEDs
Auxiliary Switch 12 Form C
Local ARMS Switch w/ Locking Cover & Light
ARMS Interposing Relay and Light
ARMS Interposing Relay and Light Voltage 120Vac
Cell Switch 8-Form C contacts
Relaying Class, Bus CT, 4000:5
Bus CT Mounted Connection - Line
Relaying Class, WYE (4-Wire), VTs (Voltage Transformer(s))
- D SPD - 250kA SPD - Standard Feature Package w/ Surge Counter**
- H Blank Compartment**

Project Name: Linde Phoenix AZ TSMC Phases
AP21-1+ 5
General Order No:
Bid Date 9/30/2026

Negotiation No: RH130721X6K2
Alternate No: 0005
Est. Purchase Date: 9/30/2026

Structure

- 2 30in Structure 4000 Amps**
EEMAC/Nema 1A Enclosure
30in ANSI Type 2B Arc Resistant
Arc Plenum
- A Instruments - 1/2 High 30" Metering Compartment**
- C Breaker - MPS-832 Feeder, [Drawout/O-E/O], 3200A Magnum PXR Breaker, PXR 25, LSIG**
Typical Qty/Cable size per Ph(N) & G: (9)-500/Ph, 500G
Sensor + Plug (Rated Current In)
3200
PXR25 LSIG w/ ARMs w/ Modbus Trip Unit
Standard Mechanical Lugs
Bell alarm (OTS) Switch - Indicator with 2-Form C Contacts
Brk control Sw: Standard E34 switch with open & closed LEDs
Auxiliary Switch 12 Form C
Local ARMS Switch w/ Locking Cover & Light
ARMS Interposing Relay and Light
ARMS Interposing Relay and Light Voltage 120Vac
Padlock, Metal Frame, Plastic Cover
Metering Class, Compartment CT, 3200:5
- D Blank Compartment**

Structure

- 3 44in Structure 4000 Amps**
EEMAC/Nema 1A Enclosure
44in ANSI Type 2B Arc Resistant
Arc Plenum
- A TransferScheme - 1/2 High Transfer Scheme Operator Interface**
- E Instruments - 1/2 High Metering Compartment**
- C Breaker - MPS-840 Tie, [Drawout/O-E/O], 4000A Magnum PXR Breaker, PXR 25, LSIG**
Sensor + Plug (Rated Current In)
4000
PXR25 LSIG w/ ARMs w/ Modbus Trip Unit
Tie Breaker with Panel-Mounted Controlled Auto-Transfer
Tie Breaker Structure Adder
Bell alarm (OTS) Switch - Indicator with 2-Form C Contacts
Brk control Sw: Standard E34 switch with open & closed LEDs
Auxiliary Switch 12 Form C
Local ARMS Switch w/ Locking Cover & Light
ARMS Interposing Relay and Light
ARMS Interposing Relay and Light Voltage 120Vac
Cell Switch 8-Form C contacts
Metering Class, Compartment CT, 4000:5
- D Blank Compartment**
- H Blank Compartment**

Project Name: Linde Phoenix AZ TSMC Phases
AP21-1+ 5
General Order No:
Bid Date 9/30/2026

Negotiation No: RH130721X6K2
Alternate No: 0005
Est. Purchase Date: 9/30/2026

Structure

- 4 30in Structure 4000 Amps**
EEMAC/Nema 1A Enclosure
30in ANSI Type 2B Arc Resistant
Arc Plenum
- A Instruments - 1/2 High 30" Metering Compartment**
- C Breaker - MPS-832 Feeder, [Drawout/O-E/O], 3200A Magnum PXR Breaker, PXR 25, LSIG**
Typical Qty/Cable size per Ph(N) & G: (9)-500/Ph, 500G
Sensor + Plug (Rated Current In)
3200
PXR25 LSIG w/ ARMs w/ Modbus Trip Unit
Standard Mechanical Lugs
Bell alarm (OTS) Switch - Indicator with 2-Form C Contacts
Brk control Sw: Standard E34 switch with open & closed LEDs
Auxiliary Switch 12 Form C
Local ARMS Switch w/ Locking Cover & Light
ARMS Interposing Relay and Light
ARMS Interposing Relay and Light Voltage 120Vac
Padlock, Metal Frame, Plastic Cover
Metering Class, Compartment CT, 3200:5
- D Blank Compartment**

Structure

- 5 44in Structure 4000 Amps**
EEMAC/Nema 1A Enclosure
44in ANSI Type 2B Arc Resistant
Arc Plenum
- A MainMetering - 1/2 High Main Metering Compartment**
Current Transformer Ratio 4000:5
SEL-751 Feeder Protection Relay
- E Instruments - 1/2 High Metering Compartment**
- C Breaker - MPS-840 Main, [Drawout/O-E/O], 4000A Magnum PXR Breaker, PXR 25, LSIG**
Typical Qty/Cable size per Ph(N) & G: (11)-500/Ph, 500G
Sensor + Plug (Rated Current In)
4000
PXR25 LSIG w/ ARMs w/ Modbus Trip Unit
Standard Mechanical Lugs
Bell alarm (OTS) Switch - Indicator with 2-Form C Contacts
Brk control Sw: Standard E34 switch with open & closed LEDs
Auxiliary Switch 12 Form C
Local ARMS Switch w/ Locking Cover & Light
ARMS Interposing Relay and Light
ARMS Interposing Relay and Light Voltage 120Vac
Cell Switch 8-Form C contacts
Relaying Class, Bus CT, 4000:5
Bus CT Mounted Connection - Line
Relaying Class, WYE (4-Wire), VTs (Voltage Transformer(s))
- D SPD - 250kA SPD - Standard Feature Package w/ Surge Counter**
- H Blank Compartment**

Qty List of Materials

- 1 Standard Voltage Selection (Included)
- 1 Standard Frequency Selection (Included)
- 1 4000 amps (Standard - Included)
- 1 UL/Warning Label Language: English Only
- 1 Certified Test Report (Std Test)

Detail Bill of Material

Project Name: Linde Phoenix AZ TSMC Phases
AP21-1+ 5
General Order No:
Bid Date 9/30/2026

Negotiation No: RH130721X6K2
Alternate No: 0005
Est. Purchase Date: 9/30/2026

Qty List of Materials

- 5 #14 AWG Control Wire
- 5 Gray Control Wire Color
- 8 Control Wire Mkrs(Machine Printed on Wire (Std))
- 8 (Origin/Wire Name/Destination) Control Wire Labeling
- 8 Screw-Clamped Wire Terminals
- 5 Green Ground Wire Color
- 5 #10 AWG CT Wire
- 5 Gray CT Wire Color
- 5 Ring Tongue CT Wire Terminals
- 5 Terminal Blocks Strip Labels
- 1 24VDC ATR Control Voltage - Switchgear Supplied
- 1 120VAC Motor Control Voltage - Switchgear Supplied
- 1 120VAC Close Control Voltage - Switchgear Supplied
- 1 120VAC Trip Control Voltage - Switchgear Supplied
- 1 120VAC Lights Control Voltage - Switchgear Supplied
- 1 Overhead Breaker Lifting Device
- 1 Ratchet & Extension
- 2 Touch Up Paint
- 3 Sets of Spare Fuses
- 3 Sets of Spare Indicating Lights
- 1 Standard Lineup Arrangement (Included)
- 2 Main Breakers with Panel-Mounted Controlled Auto-Transfer
- 1 2 Source Control Power Transfer (120 VAC Req'd)
- 8 Compartments with Interior Nameplate
- 8 Secondary Door with Interior Nameplate
- 4 Seg Barriers Vertical Section
- 15 Space Heater
- 1 Thermostat(Fixed Calibration)
- 1 Warning Labels
- 5 Primary Disconnect Shutters
- 8 Saddle-Type Terminal Blocks
- 1 Magnum Remote Racking Device (MRR1000 w/ US Power Cord & Storage Case w/ 25 FT Cable)
- 5 Tin Plated Copper Bus Section
- 1 IBC/CBC Seismic Qualified
- 3 44in Structure 4000 Amps
- 5 EEMAC/Nema 1A Enclosure
- 3 44in ANSI Type 2B Arc Resistant
- 2 MPS-840 Main, [Drawout/O-E/O], 4000A Magnum PXR Breaker
- 5 PXR25 LSIG w/ ARMs w/ Modbus Trip Unit
- 4 Standard Mechanical Lugs
- 5 Bell alarm (OTS) Switch - Indicator with 2-Form C Contacts
- 5 Brk control Sw: Standard E34 switch with open & closed LEDs
- 5 Auxiliary Switch 12 Form C
- 5 Local ARMS Switch w/ Locking Cover & Light
- 5 ARMS Interposing Relay and Light
- 5 ARMS Interposing Relay and Light Voltage 120Vac
- 3 Cell Switch 8-Form C contacts
- 6 Relaying Class, Bus CT, 4000:5
- 2 Bus CT Mounted Connection - Line
- 2 Relaying Class, WYE (4-Wire), VTs (Voltage Transformer(s)
- 3 Ammeter & Switch, 3 PH, 1% (Instdoor mtd) w/CT's
- 5 Voltmeter & Switch, 3 PH, 1% (Instdoor mtd) w/PT's
- 2 1/2 High Main Metering Compartment
- 2 Current Transformer Ratio 4000:5
- 3 SEL-751 Feeder Protection Relay

Detail Bill of Material

Project Name: Linde Phoenix AZ TSMC Phases
AP21-1+ 5
General Order No:
Bid Date 9/30/2026

Negotiation No: RH130721X6K2
Alternate No: 0005
Est. Purchase Date: 9/30/2026

Qty List of Materials

- 3 1/2 High Metering Compartment
- 2 250kA SPD - Standard Feature Package w/Surge Counter
- 6 Blank Compartment
- 5 Arc Plenum
- 2 30in Structure 4000 Amps
- 2 30in ANSI Type 2B Arc Resistant
- 2 MPS-832 Feeder, [Drawout/O-E/O], 3200A Magnum PXR Breaker
- 2 Padlock, Metal Frame, Plastic Cover
- 6 Metering Class, Compartment CT, 3200:5
- 2 1/2 High 30" Metering Compartment
- 1 MPS-840 Tie, [Drawout/O-E/O], 4000A Magnum PXR Breaker
- 1 Tie Breaker with Panel-Mounted Controlled Auto-Transfer
- 1 Tie Breaker Structure Adder
- 3 Metering Class, Compartment CT, 4000:5
- 1 1/2 High Transfer Scheme Operator Interface
- 1 Open Transition for Automatic Transfer (Standard)
- 1 Eaton PLC w/ Remote Touchscreen - Standard
- 1 Wall Mounted Remote Control Box (for dedicated control switches)
- 3 E34 ARMS Switch
- 3 E34 ARMS Light
- 2 E34 Open and Close Lights
- 1 Additional Shipping Splits
- 5 Steel Floor Plates
- 1 Arc Resistant Plenum Setup within Switchgear Perimeter
- 5 Vent Screens
- 1 Wall Mounted Plenum Exhaust Duct - Standard
- 1 SEL-751 ON TIE
- 8 IR Window, GM Tech/IRISS (4") - Polymer
- 5 FT TEST SWITCH
- 3 Lockout Relay, 86 Device
- 5 Bolted Hinged Covers
- 2 5-kVA CPT
- 5 Vertical Riser: Sized per IEEE C37.20 (Standard option)
- 1 There IS NOT a Power Factor/Harmonic Correction device to be coordinated with the Lineup

Item No.	Qty	Product	Description
	1	LV Assembly	FOB-DESTINATION

Designation (LVA) LOW VOLTAGE ASSEMBLY FOB D

Item No.	Qty	Product	Description
	1	LOW VOLTAGE SWITCHGEAR	EATON 24 MONTH EXTENDED WARRANTY - LVA

Catalog No 24MOWARLVA

Qty List of Materials

- 1 EATON 24 MONTH EXTENDED WARRANTY - LVA

Detail Bill of Material

Project Name: Linde Phoenix AZ TSMC Phases
AP21-1+ 5
General Order No:
Bid Date 9/30/2026

Negotiation No: RH130721X6K2
Alternate No: 0005
Est. Purchase Date: 9/30/2026

Item No.	Qty	Product	Description
	2	MCC Aftermarket	WITNESS TEST

Catalog No WITNESS TEST
Designation WITNESS TEST

Item No.	Qty	Product	Description
	5	MCC Aftermarket	WITNESS TEST

Catalog No WITNESS TEST
Designation WITNESS TEST MCCs

Item No.	Qty	Product	Description
	1	Motor Control Centers	MCC Spare Parts

Designation 13-ES9487.1A SPARES

Qty List of Materials

- 2 CPT- 100VA Secondary Fuse-1.4A Box of 10
- 3 CPT- 100VA Primary Fuse-1A Box of 10
- 2 CPT- 150VA Secondary Fuse-2A Box of 10
- 4 CPT- 150VA Primary Fuse-1.5A Box of 10
- 1 CPT- 250VA Secondary Fuse-3.5A Box of 10
- 2 CPT- 250VA Primary Fuse-2.5A Box of 10

Item No.	Qty	Product	Description
	1	Motor Control Centers	MCC Spare Parts

Designation 13-ES9487.1B SPARES

Qty List of Materials

- 2 CPT- 100VA Secondary Fuse-1.4A Box of 10
- 3 CPT- 100VA Primary Fuse-1A Box of 10
- 2 CPT- 150VA Secondary Fuse-2A Box of 10
- 4 CPT- 150VA Primary Fuse-1.5A Box of 10
- 1 CPT- 250VA Secondary Fuse-3.5A Box of 10
- 2 CPT- 250VA Primary Fuse-2.5A Box of 10

Item No.	Qty	Product	Description
	1	Motor Control Centers	MCC Spare Parts

Designation 13-ES9487.3 SPARES

Qty List of Materials

- 2 CPT- 100VA Secondary Fuse-1.4A Box of 10
- 3 CPT- 100VA Primary Fuse-1A Box of 10
- 2 CPT- 250VA Secondary Fuse-3.5A Box of 10
- 4 CPT- 250VA Primary Fuse-2.5A Box of 10
- 2 CPT- 150VA Secondary Fuse-2A Box of 10
- 4 CPT- 150VA Primary Fuse-1.5A Box of 10

Detail Bill of Material

Project Name: Linde Phoenix AZ TSMC Phases
AP21-1+ 5
General Order No:
Bid Date 9/30/2026

Negotiation No: RH130721X6K2
Alternate No: 0005
Est. Purchase Date: 9/30/2026

Item No.	Qty	Product	Description
	1	Motor Control Centers	MCC Spare Parts

Designation 15-ES9487.1 SPARES

Qty List of Materials

- 2 CPT- 100VA Secondary Fuse-1.4A Box of 10
- 4 CPT- 100VA Primary Fuse-1A Box of 10
- 2 CPT- 250VA Secondary Fuse-3.5A Box of 10
- 4 CPT- 250VA Primary Fuse-2.5A Box of 10
- 2 CPT- 150VA Secondary Fuse-2A Box of 10
- 4 CPT- 150VA Primary Fuse-1.5A Box of 10

Item No.	Qty	Product	Description
	1	Motor Control Centers	MCC Spare Parts

Designation 15-ES9487.2 SPARES

Qty List of Materials

- 2 CPT- 100VA Secondary Fuse-1.4A Box of 10
- 3 CPT- 100VA Primary Fuse-1A Box of 10
- 2 CPT- 250VA Secondary Fuse-3.5A Box of 10
- 4 CPT- 250VA Primary Fuse-2.5A Box of 10
- 2 CPT- 150VA Secondary Fuse-2A Box of 10
- 4 CPT- 150VA Primary Fuse-1.5A Box of 10

Item No.	Qty	Product	Description
	1	Motor Control Centers	MCC Spare Parts

Designation 50-ES9487.1A SPARES

Qty List of Materials

- 3 Kit-3 Aerosol Cans ANSI-61 Touch Up Paint
- 3 Kit-3 Aerosol Cans Gloss White Touch Up Paint
- 1 Control Power Transformer, 100VA
- 1 800A Current transformer

Item No.	Qty	Product	Description
	1	Motor Control Centers	MCC Spare Parts

Designation 50-ES9487.1B SPARES

Qty List of Materials

- 3 Kit-3 Aerosol Cans ANSI-61 Touch Up Paint
- 3 Kit-3 Aerosol Cans Gloss White Touch Up Paint
- 1 Control Power Transformer, 100VA
- 1 800A Current transformer

Detail Bill of Material

Project Name:	Linde Phoenix AZ TSMC Phases AP21-1+ 5	Negotiation No:	RH130721X6K2
General Order No:		Alternate No:	0005
Bid Date	9/30/2026	Est. Purchase Date:	9/30/2026

Item No.	Qty	Product	Description
	1	Motor Control Centers	60 Hz, Class 1B wiring, 480V 3-Phase Service, 65,000 Bracing, 65 Short Circuit Rating, Bottom Incoming, NEMA 1 Gasketed 21" Front Mt Only enclosure, 2000A Copper Main Horizontal Bus, No Neutral, Main Breaker. Used X-Space: 157, Blank X-Space: 35, Future X-Space: 0, MCC Lead Time Code: U.

Designation 480V MCC#1 15-ES9487.1

Qty List of Materials

- 2 C445 is place holder for SEL-849
- 1 PTs connected to line said of main breakers
- 1 PTs to ATS
- 2 Control wire before CPT to be black and labeled "Hot with line side bus energized"
- 2 CPT connected to line side of main breakers
- 2 Control power to ATS main breakers
- 39 Breaker terminal shield
- 3 MCB door bolted shut - add warning label that voltage is present
- 3 Direct bottom feed approved by Linde
- 3 Wire ARMS to TB for external indication
- 3 Arms sel switch padlock cover
- 3 External ARMS light and switch
- 3 MDNC Main 1 Bkr (1600A trip), Lugs: 10-#1/0-750Kcmil
- 1 6X panel for ATS controls
- 1 Breaker to be NGH 800AF/T - ARMS not required
- 2 Voltmeter and Switch
- 4 600V Potential transformer
- 4 FVNR Starter Size 1 [HMCP]
- 7 FVNR Starter Size 1 [TM CktBrk]
- 9 FVNR Starter Size 2 [TM CktBrk]
- 2 FVNR Starter Size 3 [TM CktBrk]
- 1 FVNR Starter Size 5 [TM CktBrk]
- 1 FVNR Starter Size 6 [TM CktBrk]
- 2 PDG2 Bkr (30A trip)
- 3 PDG2 Bkr (225A trip)
- 6 PDG2 Bkr (150A trip)
- 4 PDG2 Bkr (50A trip)
- 1 PDG2 Bkr (70A trip)
- 3 Additional 100VA CPT
- 2 Size 3, STARTER-150VA Typical, w/extra 50VA
- 14 Size 1, STARTER-100VA Typical, w/extra 50VA
- 1 250VA Individual CPT, Fused
- 4 Size 5-6 Starter - Normally Open
- 4 Size 5-6 Starter - Normally Closed
- 44 Size 1-4 Starter - Normally Open
- 44 Size 1-4 Starter - Normally Closed
- 24 Red Run
- 2 Motor Management Relay (C445)
- 1 Description missing for NOCATNUM
- 1 Size 5, STARTER-250VA Typical, w/extra 50VA
- 2 C-H Model D15 NEMA A600, 4 Pole
- 2 Additional X-Space
- 1 Size 6, STARTER-250VA Typical, w/extra 50VA
- 3 Breaker Thermal Mag
- 4 Breaker HMCP

Detail Bill of Material

Project Name: Linde Phoenix AZ TSMC Phases
AP21-1+ 5
General Order No:
Bid Date 9/30/2026

Negotiation No: RH130721X6K2
Alternate No: 0005
Est. Purchase Date: 9/30/2026

Qty	List of Materials
16	Standard Trip
11	Bkr Aux-1NO/1NC
27	PD PXR 20 Stand. Rating, Stand. Inter
3	Bell Alarm Contact
24	Terminal Block - Latching Pull-Apart, Std.
22	Solid State Overload Relay (Standard C440)
24	Wiremarkers at Each End
24	#14awg, MTW Control Wire
3	Auxiliary Switch 2A/2B
9	PD TH FIX STD RAT STD INT
27	Device Labels
6	Size 2, STARTER-100VA Typical, w/extra 50VA
1	36 in. blank relay panel
2	12 in. blank relay panel
1	18" Door
3	12" Door
14	Structure Bottom plates
14	600A Horiz. Cu Gnd Bus, 1/4" x 2" Bar
1	Enclosure End Braces, IBC/CBC Seismic Qualified
14	Tin Plated horizontal bus
14	65KA Bus Bracing
14	Labyrinth, Isolated/Insulated vertical bus barrier with shutters
14	Bottom Vertical Bus Barrier
1	Freedom Arc Resistant MCC List Price Adder
2	Description missing for FireWallBarrier
2	Description missing for BP
14	600A Vertical Bus (Tin-plated cu)
14	Fire Wall Barriers between each section
14	Sleeve Wrapped Insulated main bus
1	Customer Specific Wiring Diagrams
1	Bus Tie Transition
2	Expansion chambers
13	2000A 50Deg C, Copper Frnt Mtd 21" NEMA 1 Gasketed
1	Master NP to read "480V MCC#1 11-ES9487.1"
1	Control wire above 150VAC to be black - add caution label to bucket doors
1	Include Magnum breaker lifting yoke to work with lift truck
1	FAY Standard Main-Tie-Main transfer scheme
1	Motor operators

Item No.	Qty	Product	Description
	1	Motor Control Centers	60 Hz, Class 1B wiring, 480V 3-Phase Service, 65,000 Bracing, 65 Short Circuit Rating, Bottom Incoming, NEMA 1 Gasketed 21" Front Mt Only enclosure, 2500A Copper Main Horizontal Bus, No Neutral, Main Breaker. Used X-Space: 118, Blank X-Space: 26, Future X-Space: 0, MCC Lead Time Code: U.

Designation 480V MCC#1A 13-ES9487.1A

Qty	List of Materials
1	Arms sel switch padlock cover
9	VFD control relay coil surge supressor
1	MCB door bolted shut - add warning label that voltage is present
1	Direct bottom feed approved by Linde
1	Wire ARMS to TB for external indication

Detail Bill of Material

Project Name: Linde Phoenix AZ TSMC Phases
AP21-1+ 5
General Order No:
Bid Date 9/30/2026

Negotiation No: RH130721X6K2
Alternate No: 0005
Est. Purchase Date: 9/30/2026

Qty	List of Materials
1	External ARMS light and switch
1	MDPXR Main Bkr (2500A trip), Lugs: 5-#4-750Kcmil
2	Control wire before CPT to be black and labeled "Hot with line side bus energized"
34	Breaker terminal shield
2	C445 is place holder for SEL-849
1	Breaker to be NGH 800AF/T - ARMS not required
1	Voltmeter and Switch
2	600V Potential transformer
4	FVNR Starter Size 1 [HMCP]
7	FVNR Starter Size 1 [TM CktBrk]
6	FVNR Starter Size 2 [TM CktBrk]
2	FVNR Starter Size 3 [TM CktBrk]
1	FVNR Starter Size 5 [TM CktBrk]
1	FVNR Starter Size 6 [TM CktBrk]
1	SPXVFD, Constant torque, 61 FLA, 480V, Tm. Brk.
1	SPXVFD, Constant torque, 12 FLA, 480V, Tm. Brk.
1	SPXVFD, Constant torque, 16 FLA, 480V, Tm. Brk.
3	PDG2 Bkr (225A trip)
1	PDG2 Bkr (50A trip)
1	PDG2 Bkr (30A trip)
2	PDG2 Bkr (70A trip)
4	PDG2 Bkr (150A trip)
1	Additional 100VA CPT
2	Size 3, STARTER-150VA Typical, w/extra 50VA
13	Size 1, STARTER-100VA Typical, w/extra 50VA
1	250VA Individual CPT, Fused
38	Size 1-4 Starter - Normally Closed
4	Size 5-6 Starter - Normally Open
4	Size 5-6 Starter - Normally Closed
38	Size 1-4 Starter - Normally Open
3	6 DI, 1 DO, 2 AI, 1 AO, 1 +10 Vdc ref, 2 ext, +24 Vdc/EXT + 24 Vdc
3	White Power On
3	Amber Fault
13	Standard Trip
3	Additional 150VA CPT
11	C-H Model D15 NEMA A600, 4 Pole
3	2 RO (NC-NO)
3	SPX Upgrade
2	SVX9000 Dv/Dt Output Filter - FR5
3	Fdr Bkr 1 N.O.-1 N.C. Aux Sw.
2	SVX9000 VFD Output Contactor - FR5
1	Size 6, STARTER-250VA Typical, w/extra 50VA
2	Motor Management Relay (C445)
1	Size 5, STARTER-250VA Typical, w/extra 50VA
1	Description missing for NOCATNUM
3	1 Unit PB (Reset)
3	Blank Device Panel
1	SVX9000 VFD Output Contactor - FR7
7	PD TH FIX STD RAT STD INT
1	RMS 310+ LSIG Trip w/ GF
1	PD PXR 25 Stand. Rating, High Inter ARMS LSIG
1	Additional X-Space
4	Size 2, STARTER-100VA Typical, w/extra 50VA
24	#14awg, MTW Control Wire
24	Wiremarkers at Each End

Detail Bill of Material

Project Name: Linde Phoenix AZ TSMC Phases
AP21-1+ 5
General Order No:
Bid Date 9/30/2026

Negotiation No: RH130721X6K2
Alternate No: 0005
Est. Purchase Date: 9/30/2026

Qty	List of Materials
21	PD PXR 20 Stand. Rating, Stand. Inter
24	Terminal Block - Latching Pull-Apart, Std.
24	Device Labels
21	Red Run
8	Bkr Aux-1NO/1NC
1	SVX9000 Dv/Dt Output Filter - FR7
4	Breaker HMCP
19	Solid State Overload Relay (Standard C440)
2	6" Door
1	Freedom Arc Resistant MCC List Price Adder
10	Tin Plated horizontal bus
10	65KA Bus Bracing
10	Labyrinth, Isolated/Insulated vertical bus barrier with shutters
10	Bottom Vertical Bus Barrier
1	Enclosure End Braces, IBC/CBC Seismic Qualified
10	Sleeve Wrapped Insulated main bus
10	Structure Bottom plates
2	Description missing for FireWallBarrier
2	Description missing for BP
10	600A Vertical Bus (Tin-plated cu)
10	Fire Wall Barriers between each section
10	800A Horiz. Cu Gnd Bus, 1/4" x 2" Bar
1	Customer Specific Wiring Diagrams
2	Expansion chambers
10	2500A 50Deg C, Copper Fmt Mtd 21" NEMA 1 Gasketed
1	Master NP to read "480V MCC#1A 9-ES9487.1A"
1	Control wire above 150VAC to be black - add caution label to bucket doors
1	Motor operators

Item No.	Qty	Product	Description
	1	Motor Control Centers	60 Hz, Class 1B wiring, 480V 3-Phase Service, 65,000 Bracing, 65 Short Circuit Rating, Bottom Incoming, NEMA 1 Gasketed 21" Front Mt Only enclosure, 800A Copper Main Horizontal Bus, No Neutral, Main Breaker. Used X-Space: 34, Blank X-Space: 26, Future X-Space: 0, MCC Lead Time Code: U.

Designation 480V MCC#1A 50-ES9487.1A

Qty	List of Materials
10	Breaker terminal shield
1	MCB door bolted shut - add warning label that voltage is present
1	Direct bottom feed approved by Linde
1	MDPXR Main Bkr (400A trip), Lugs: 5-#4-750Kcmil
1	Voltmeter and Switch
2	600V Potential transformer
2	PDG2 Bkr (30A trip)
4	PDG2 Bkr (40A trip)
4	PDG2 Bkr (60A trip)
1	PD PXR 25 Stand. Rating, High Inter ARMS LSIG
10	PD PXR 20 Stand. Rating, Stand. Inter
1	Shunt Trip (Std on EO Bkrs)
1	Auxiliary Switch 2A/2B
1	Bell Alarm Contact
1	12" Door

Detail Bill of Material

Project Name: Linde Phoenix AZ TSMC Phases
AP21-1+ 5
General Order No:
Bid Date 9/30/2026

Negotiation No: RH130721X6K2
Alternate No: 0005
Est. Purchase Date: 9/30/2026

Qty List of Materials

- 3 Fire Wall Barriers between each section
- 3 600A Vertical Bus (Tin-plated cu)
- 2 Description missing for BP
- 2 Description missing for FireWallBarrier
- 1 Enclosure End Braces, IBC/CBC Seismic Qualified
- 3 600A Horiz. Cu Gnd Bus, 1/4" x 2" Bar
- 3 Sleeve Wrapped Insulated main bus
- 1 Freedom Arc Resistant MCC List Price Adder
- 3 Bottom Vertical Bus Barrier
- 3 Labyrinth, Isolated/Insulated vertical bus barrier with shutters
- 3 65KA Bus Bracing
- 3 Tin Plated horizontal bus
- 3 Structure Bottom plates
- 1 Customer Specific Wiring Diagrams
- 3 800A 50Deg C, Copper Frnt Mtd 21" NEMA 1 Gasketed
- 2 Expansion chambers
- 1 Master NP to read "480V MCC#1A 30-ES9487.1A"
- 1 Control wire above 150VAC to be black - add caution label to bucket doors

Item No.	Qty	Product	Description
	1	Motor Control Centers	60 Hz, Class 1B wiring, 480V 3-Phase Service, 65,000 Bracing, 65 Short Circuit Rating, Bottom Incoming, NEMA 1 Gasketed 21" Front Mt Only enclosure, 2500A Copper Main Horizontal Bus, No Neutral, Main Breaker. Used X-Space: 128, Blank X-Space: 28, Future X-Space: 0, MCC Lead Time Code: U.

Designation 480V MCC#1B 13-ES9487.1B

Qty List of Materials

- 34 Breaker terminal shield
- 9 VFD control relay coil surge supressor
- 1 ARMS control in bucket above
- 1 MCB door bolted shut - add warning label that voltage is present
- 1 Direct bottom feed approved by Linde
- 1 Wire ARMS to TB for external indication
- 1 Arms sel switch padlock cover
- 1 External ARMS light and switch
- 2 C445 is place holder for SEL-849
- 1 Breaker to be NGH 800AF/T - ARMS not required
- 2 Control wire before CPT to be black and labeled "Hot with line side bus energized"
- 1 PDG6E Main Bkr (2500A trip), Lugs: 4-#500-1000Kcmil
- 1 Voltmeter and Switch
- 2 600V Potential transformer
- 4 FVNR Starter Size 1 [HMCP]
- 5 FVNR Starter Size 1 [TM CktBrk]
- 9 FVNR Starter Size 2 [TM CktBrk]
- 2 FVNR Starter Size 3 [TM CktBrk]
- 1 FVNR Starter Size 5 [TM CktBrk]
- 1 FVNR Starter Size 6 [TM CktBrk]
- 1 SPXVFD, Constant torque, 16 FLA, 480V, Tm. Brk.
- 1 SPXVFD, Constant torque, 12 FLA, 480V, Tm. Brk.
- 1 SPXVFD, Constant torque, 61 FLA, 480V, Tm. Brk.
- 1 PDG3ECompact Bkr (400A trip)
- 2 PDG2 Bkr (100A trip)

Detail Bill of Material

Project Name: Linde Phoenix AZ TSMC Phases
AP21-1+ 5
General Order No:
Bid Date 9/30/2026

Negotiation No: RH130721X6K2
Alternate No: 0005
Est. Purchase Date: 9/30/2026

Qty	List of Materials
2	PDG2 Bkr (80A trip)
1	PDG2 Bkr (50A trip)
1	PDG2 Bkr (30A trip)
1	PDG5E Bkr (1200A trip)
1	PDG2 Bkr (70A trip)
2	PDG2 Bkr (150A trip)
13	Size 1, STARTER-100VA Typical, w/extra 50VA
1	250VA Individual CPT, Fused
2	Size 3, STARTER-150VA Typical, w/extra 50VA
1	Additional 100VA CPT
4	Size 5-6 Starter - Normally Closed
40	Size 1-4 Starter - Normally Open
4	Size 5-6 Starter - Normally Open
40	Size 1-4 Starter - Normally Closed
3	Amber Fault
3	1 Unit PB (Reset)
3	2 RO (NC-NO)
11	C-H Model D15 NEMA A600, 4 Pole
1	SVX9000 VFD Output Contactor - FR7
3	SPX Upgrade
2	SVX9000 Dv/Dt Output Filter - FR5
2	SVX9000 VFD Output Contactor - FR5
3	Fdr Bkr 1 N.O.-1 N.C. Aux Sw.
1	SVX9000 Dv/Dt Output Filter - FR7
3	Additional 150VA CPT
3	White Power On
11	Bkr Aux-1NO/1NC
3	Blank Device Panel
1	Motor Management Relay (C445)
1	Description missing for NOCATNUM
1	Size 5, STARTER-250VA Typical, w/extra 50VA
1	PD PXR 20 Stand. Rating, Stand. Inter ARMS LSIG
24	PD PXR 20 Stand. Rating, Stand. Inter
1	Additional X-Space
5	Size 2, STARTER-100VA Typical, w/extra 50VA
3	6 DI, 1 DO, 2 AI, 1 AO, 1 +10 Vdc ref, 2 ext, +24 Vdc/EXT + 24 Vdc
25	#14awg, MTW Control Wire
21	Solid State Overload Relay (Standard C440)
25	Terminal Block - Latching Pull-Apart, Std.
26	Device Labels
22	Red Run
1	Size 6, STARTER-250VA Typical, w/extra 50VA
12	Standard Trip
4	Breaker HMCP
5	PD TH FIX STD RAT STD INT
25	Wiremarkers at Each End
1	6 in. blank relay panel
4	6" Door
1	1200A Vertical Bus (Tin-plated cu)
1	Customer Specific Wiring Diagrams
11	Fire Wall Barriers between each section
10	600A Vertical Bus (Tin-plated cu)
2	Description missing for BP
2	Description missing for FireWallBarrier
11	800A Horiz. Cu Gnd Bus, 1/4" x 2" Bar

Detail Bill of Material

Project Name: Linde Phoenix AZ TSMC Phases
AP21-1+ 5
General Order No:
Bid Date 9/30/2026

Negotiation No: RH130721X6K2
Alternate No: 0005
Est. Purchase Date: 9/30/2026

Qty	List of Materials
11	Sleeve Wrapped Insulated main bus
1	Freedom Arc Resistant MCC List Price Adder
11	Bottom Vertical Bus Barrier
11	Labyrinth, Isolated/Insulated vertical bus barrier with shutters
11	65KA Bus Bracing
11	Tin Plated horizontal bus
11	Structure Bottom plates
1	Enclosure End Braces, IBC/CBC Seismic Qualified
11	2500A 50Deg C, Copper Fmt Mtd 21" NEMA 1 Gasketed
2	Expansion chambers
1	Master NP to read "480V MCC#1B 9-ES9487.1B"
1	Control wire above 150VAC to be black - add caution label to bucket doors
1	Motor operators

Item No.	Qty	Product	Description
	1	Motor Control Centers	60 Hz, Class 1B wiring, 480V 3-Phase Service, 65,000 Bracing, 65 Short Circuit Rating, Bottom Incoming, NEMA 1 Gasketed 21" Front Mt Only enclosure, 800A Copper Main Horizontal Bus, No Neutral, Main Breaker. Used X-Space: 36, Blank X-Space: 24, Future X-Space: 0, MCC Lead Time Code: U.

Designation 480V MCC#1B 50-ES9487.1B

Qty	List of Materials
11	Breaker terminal shield
1	MCB door bolted shut - add warning label that voltage is present
1	Direct bottom feed approved by Linde
1	MDPXR Main Bkr (400A trip), Lugs: 5-#4-750Kcmil
1	Voltmeter and Switch
2	600V Potential transformer
3	PDG2 Bkr (30A trip)
4	PDG2 Bkr (40A trip)
4	PDG2 Bkr (60A trip)
11	PD PXR 20 Stand. Rating, Stand. Inter
1	Shunt Trip (Std on EO Bkrs)
1	Auxiliary Switch 2A/2B
1	Bell Alarm Contact
1	PD PXR 25 Stand. Rating, High Inter ARMS LSIG
3	Fire Wall Barriers between each section
3	600A Vertical Bus (Tin-plated cu)
2	Description missing for BP
2	Description missing for FireWallBarrier
1	Enclosure End Braces, IBC/CBC Seismic Qualified
3	600A Horiz. Cu Gnd Bus, 1/4" x 2" Bar
3	Sleeve Wrapped Insulated main bus
1	Freedom Arc Resistant MCC List Price Adder
3	Bottom Vertical Bus Barrier
3	Labyrinth, Isolated/Insulated vertical bus barrier with shutters
3	65KA Bus Bracing
3	Tin Plated horizontal bus
3	Structure Bottom plates
1	Customer Specific Wiring Diagrams
3	800A 50Deg C, Copper Fmt Mtd 21" NEMA 1 Gasketed
2	Expansion chambers
1	Master NP to read "480V MCC#1B 30-ES9487.1B"
1	Control wire above 150VAC to be black - add caution label to bucket doors

Detail Bill of Material

Project Name: Linde Phoenix AZ TSMC Phases
AP21-1+ 5
General Order No:
Bid Date 9/30/2026

Negotiation No: RH130721X6K2
Alternate No: 0005
Est. Purchase Date: 9/30/2026

Item No.	Qty	Product	Description
	1	Motor Control Centers	60 Hz, Class 1B wiring, 480V 3-Phase Service, 65,000 Bracing, 65 Short Circuit Rating, Bottom Incoming, NEMA 1 Gasketed 21" Front Mt Only enclosure, 2500A Copper Main Horizontal Bus, No Neutral, Main Breaker. Used X-Space: 239, Blank X-Space: 49, Future X-Space: 0, MCC Lead Time Code: U.

Designation 480V MCC#2 15-ES9487.2

Qty List of Materials

- 1 External ARMs light and switch
- 2 CPT connected to line side of main breakers
- 2 Control power to ATS main breakers
- 41 Breaker terminal shield
- 1 PTs connected to line said of main breakers
- 1 PTs to ATS
- 4 Shunt trip, motor operator and spring release all 120VAC
- 4 Breaker to have 2 Form-C OTS contacts
- 4 Breaker to have 4 Form-C cell switch contacts
- 4 Padlock cover for ARMs selector switch
- 3 External Arms light and switch
- 4 Breaker control switch
- 12 VFD control relay coil surge supressor
- 4 Add electrical interlock between 8M and 15M
- 4 Add electrical interlock between 9M and 16M
- 4 Control wire before CPT to be black and labeled "Hot with line side bus energized"
- 4 Breaker to have 6a/6b MOC contacts
- 4 MDPXR Main 1 Bkr (2500A trip), Lugs: 5-#4-750Kcmil
- 2 Breaker to be NGH 800AF/T - ARMS not required
- 4 C445 is place holder for SEL-849
- 2 Add electrical interlock between 10F and 17F
- 2 Add electrical interlock between 11M and 18M
- 2 Voltmeter and Switch
- 4 600V Potential transformer
- 14 FVNR Starter Size 1 [TM CktBrk]
- 1 FVNR Starter Size 1 [HMCP]
- 4 FVNR Starter Size 2 [TM CktBrk]
- 2 FVNR Starter Size 3 [TM CktBrk]
- 2 FVNR Starter Size 5 [TM CktBrk]
- 2 FVNR Starter Size 6 [TM CktBrk]
- 4 SPX9000 VFD-VT, 140 FLA, 480V, MCCB
- 4 PDG2 Bkr (30A trip)
- 1 PDG5E Bkr (800A trip)
- 3 PDG2 Bkr (225A trip)
- 5 PDG2 Bkr (50A trip)
- 2 PDG2 Bkr (150A trip)
- 2 Size 3, STARTER-150VA Typical, w/extra 50VA
- 15 Size 1, STARTER-100VA Typical, w/extra 50VA
- 2 250VA Individual CPT, Fused
- 42 Size 1-4 Starter - Normally Closed
- 42 Size 1-4 Starter - Normally Open
- 8 Size 5-6 Starter - Normally Open
- 8 Size 5-6 Starter - Normally Closed
- 4 Motor Management Relay (C445)
- 2 Size 6, STARTER-250VA Typical, w/extra 50VA

Detail Bill of Material

Project Name: Linde Phoenix AZ TSMC Phases
AP21-1+ 5
General Order No:
Bid Date 9/30/2026

Negotiation No: RH130721X6K2
Alternate No: 0005
Est. Purchase Date: 9/30/2026

Qty	List of Materials
4	Blank Device Panel
4	6 DI, 1 DO, 2 AI, 1 AO, 1 +10 Vdc ref, 2 ext, +24 Vdc/EXT + 24 Vdc
4	2 RO (NC-NO)
4	SPX Upgrade
4	White Power On
4	Size 2, STARTER-100VA Typical, w/extra 50VA
1	Breaker HMCP
4	Amber Fault
4	1 Unit PB (Reset)
3	Description missing for NOCATNUM
2	Size 5, STARTER-250VA Typical, w/extra 50VA
6	Bkr Aux-1NO/1NC
16	C-H Model D15 NEMA A600, 4 Pole
4	Fdr Bkr 1 N.O.-1 N.C. Aux Sw.
4	SVX9000 Dv/Dt Output Filter - FR8
4	Additional 150VA CPT
25	Red Run
4	Cell Position Switch
4	PD PXR 25 Stand. Rating, High Inter ARMS LSI
4	Blue ARMS
12	Other Specify
4	2 Pos. Sel. Sw. (Misc)
3	Main-Tie-Main using PLC / Operator Interface
23	PD PXR 20 Stand. Rating, Stand. Inter
3	Portable Lift Truck
3	Manual 'Close' PB Cover
4	Electrical Operation
4	Auxiliary Switch 2A/2B
2	Additional X-Space
4	Bell Alarm Contact
29	Wiremarkers at Each End
16	PD TH FIX STD RAT STD INT
21	Standard Trip
29	Terminal Block - Latching Pull-Apart, Std.
21	Solid State Overload Relay (Standard C440)
31	Device Labels
29	#14awg, MTW Control Wire
2	12 in. blank relay panel
2	20 in. blank relay structure, 21" deep
4	12" Door
5	18" Door
2	6" Door
22	Sleeve Wrapped Insulated main bus
22	Tin Plated horizontal bus
22	65KA Bus Bracing
22	Labyrinth, Isolated/Insulated vertical bus barrier with shutters
22	Bottom Vertical Bus Barrier
1	Freedom Arc Resistant MCC List Price Adder
22	800A Horiz. Cu Gnd Bus, 1/4" x 2" Bar
1	1200A Vertical Bus (Tin-plated cu)
2	Description missing for FireWallBarrier
2	Description missing for BP
21	600A Vertical Bus (Tin-plated cu)
22	Fire Wall Barriers between each section
22	Structure Bottom plates

Detail Bill of Material

Project Name: Linde Phoenix AZ TSMC Phases
AP21-1+ 5
General Order No:
Bid Date 9/30/2026

Negotiation No: RH130721X6K2
Alternate No: 0005
Est. Purchase Date: 9/30/2026

Qty List of Materials

- 1 Customer Specific Wiring Diagrams
- 22 2500A 50Deg C, Copper Frnt Mtd 21" NEMA 1 Gasketed
- 2 Expansion chambers
- 1 Master NP to read "480V MCC#2 11-ES9487.2"
- 1 Control wire above 150VAC to be black - add caution label to bucket doors
- 1 Include Magnum breaker lifting yoke to work with lift truck
- 1 PSC Provided Main-Tie-Main-Gen transfer scheme
- 1 Motor operators

Item No.	Qty	Product	Description
	1	Motor Control Centers	60 Hz, Class 1B wiring, 480V 3-Phase Service, 65,000 Bracing, 65 Short Circuit Rating, Bottom Incoming, NEMA 1 Gasketed 21" Front Mt Only enclosure, 2500A Copper Main Horizontal Bus, No Neutral, Main Breaker. Used X-Space: 243, Blank X-Space: 45, Future X-Space: 0, MCC Lead Time Code: U.

Designation 480V MCC#3 13-ES9487.3

Qty List of Materials

- 43 Breaker terminal shield
- 4 Padlock cover for ARMs selector switch
- 4 Breaker to have 6a/6b MOC contacts
- 4 Breaker to have 4 Form-C cell switch contacts
- 4 Breaker to have 2 Form-C OTS contacts
- 4 Shunt trip, motor operator and spring release all 120VAC
- 1 PTs to ATS
- 1 PTs connected to line said of main breakers
- 12 VFD control relay coil surge supressor
- 2 Control power to ATS main breakers
- 2 CPTconnected to line side of main breakers
- 1 External ARMs light and switch
- 4 Add electrical interlock between 10M and 16M
- 4 Control wire before CPT to be black and labeled "Hot with line side bus energized"
- 4 C445 is place holder for SEL-849
- 2 Add electrical interlock between 8H and 17F
- 3 External Arms light and switch
- 4 Breaker control switch
- 4 Add electrical interlock between 9M and 15M
- 4 MDPXR Main 1 Bkr (2500A trip), Lugs: 5-#4-750Kcmil
- 2 Breaker to be NGH 800AF/T - ARMS not required
- 2 Add electrical interlock between 11M and 18M
- 2 Voltmeter and Switch
- 4 600V Potential transformer
- 11 FVNR Starter Size 1 [TM CktBrk]
- 1 FVNR Starter Size 1 [HMCP]
- 4 FVNR Starter Size 2 [TM CktBrk]
- 2 FVNR Starter Size 3 [TM CktBrk]
- 2 FVNR Starter Size 5 [TM CktBrk]
- 2 FVNR Starter Size 6 [TM CktBrk]
- 4 SPX9000 VFD-VT, 140 FLA, 480V, MCCB
- 1 PDG5E Bkr (800A trip)
- 2 PDG2 Bkr (225A trip)
- 2 PDG2 Bkr (80A trip)
- 3 PDG2 Bkr (50A trip)

Detail Bill of Material

Project Name: Linde Phoenix AZ TSMC Phases
AP21-1+ 5
General Order No:
Bid Date 9/30/2026

Negotiation No: RH130721X6K2
Alternate No: 0005
Est. Purchase Date: 9/30/2026

Qty	List of Materials
3	PDG2 Bkr (30A trip)
3	PDG2 Bkr (20A trip)
6	PDG2 Bkr (150A trip)
2	250VA Individual CPT, Fused
2	Size 3, STARTER-150VA Typical, w/extra 50VA
12	Size 1, STARTER-100VA Typical, w/extra 50VA
8	Size 5-6 Starter - Normally Open
8	Size 5-6 Starter - Normally Closed
36	Size 1-4 Starter - Normally Closed
36	Size 1-4 Starter - Normally Open
18	Standard Trip
16	C-H Model D15 NEMA A600, 4 Pole
2	Size 5, STARTER-250VA Typical, w/extra 50VA
3	Description missing for NOCATNUM
4	Motor Management Relay (C445)
3	Portable Lift Truck
1	Breaker HMCP
4	PD PXR 25 Stand. Rating, High Inter ARMS LSI
4	Cell Position Switch
3	Main-Tie-Main using PLC / Operator Interface
4	Blank Device Panel
4	6 DI, 1 DO, 2 AI, 1 AO, 1 +10 Vdc ref, 2 ext, +24 Vdc/EXT + 24 Vdc
4	2 RO (NC-NO)
4	SPX Upgrade
4	SVX9000 Dv/Dt Output Filter - FR8
4	White Power On
4	Amber Fault
4	1 Unit PB (Reset)
4	Additional 150VA CPT
4	Fdr Bkr 1 N.O.-1 N.C. Aux Sw.
3	Manual 'Close' PB Cover
6	Bkr Aux-1NO/1NC
4	Electrical Operation
26	#14awg, MTW Control Wire
13	PD TH FIX STD RAT STD INT
28	Device Labels
22	Red Run
4	Size 2, STARTER-100VA Typical, w/extra 50VA
12	Other Specify
4	Bell Alarm Contact
26	Wiremarkers at Each End
4	2 Pos. Sel. Sw. (Misc)
26	Terminal Block - Latching Pull-Apart, Std.
2	Additional X-Space
28	PD PXR 20 Stand. Rating, Stand. Inter
2	Size 6, STARTER-250VA Typical, w/extra 50VA
4	Blue ARMS
4	Auxiliary Switch 2A/2B
18	Solid State Overload Relay (Standard C440)
2	12 in. blank relay panel
2	20 in. blank relay structure, 21" deep
3	12" Door
4	18" Door
3	6" Door
1	Customer Specific Wiring Diagrams

Detail Bill of Material

Project Name: Linde Phoenix AZ TSMC Phases
AP21-1+ 5
General Order No:
Bid Date 9/30/2026

Negotiation No: RH130721X6K2
Alternate No: 0005
Est. Purchase Date: 9/30/2026

Qty	List of Materials
22	Structure Bottom plates
22	Fire Wall Barriers between each section
21	600A Vertical Bus (Tin-plated cu)
2	Description missing for BP
2	Description missing for FireWallBarrier
22	800A Horiz. Cu Gnd Bus, 1/4" x 2" Bar
22	Sleeve Wrapped Insulated main bus
1	Freedom Arc Resistant MCC List Price Adder
22	Bottom Vertical Bus Barrier
22	Labyrinth, Isolated/Insulated vertical bus barrier with shutters
22	65KA Bus Bracing
22	Tin Plated horizontal bus
1	1200A Vertical Bus (Tin-plated cu)
1	Enclosure End Braces, IBC/CBC Seismic Qualified
22	2500A 50Deg C, Copper Fmt Mtd 21" NEMA 1 Gasketed
2	Expansion chambers
1	Master NP to read "480V MCC#39-ES9487.3"
1	Control wire above 150VAC to be black - add caution label to bucket doors
1	Include Magnum breaker lifting yoke to work with lift truck
1	PSC Provided Main-Tie-Main-Gen transfer scheme
1	Motor operators

Item No.	Qty	Product	Description
	1	MCC Aftermarket	FOB-DESTINATION

Designation (LV MCC) LOW VOLTAGE MOTOR CONTROL CENTER FOB D

Item No.	Qty	Product	Description
	1	MCC Aftermarket	FOB-DESTINATION

Designation (LV MCC) LOW VOLTAGE MOTOR CONTROL CENTER FOB D

Item No.	Qty	Product	Description
	1	FAY-VLE MCC	EATON 24 MONTH EXTENDED WARRANTY - MCC

Catalog No 24MOWARMCC

Qty	List of Materials
1	EATON 24 MONTH EXTENDED WARRANTY - MCC

Item No.	Qty	Product	Description
	1	FAY-VLE MCC	EATON 24 MONTH EXTENDED WARRANTY - MCC

Catalog No 24MOWARMCC

Qty	List of Materials
1	EATON 24 MONTH EXTENDED WARRANTY - MCC

Detail Bill of Material

Project Name:	Linde Phoenix AZ TSMC Phases AP21-1+ 5	Negotiation No:	RH130721X6K2
General Order No:		Alternate No:	0005
Bid Date	9/30/2026	Est. Purchase Date:	9/30/2026

Item No.	Qty	Product	Description
	1	Enclosed Controls	ECN2478C0U- C7CAC14C23E8F3H3P1P5P9W12B10C37T15Z90Z91Z92Z93Z9 4C33Z95, NEMA -Freedom, NEMA 12- Dusttight, 600 HP, 460V, Size 7, 120V/60 110V/50 Coil, Circuit Breaker - Engineering will determine size, Drawing Number: , LIST OF MATERIAL: ECN2478C0U -Description not loaded

Catalog No ECN2478C0U-C7CAC14C23E8F3
Designation 13.ES9487.1D

Catalog No	Qty	List of Materials
B10	1	THERMAL MAG BRKR
C37	1	PER ATTACHED SCHEMATIC &ASU 9487 E-ZK 1001(EN)
T15	1	PER WD
Z90	1	SEL 849 SEL 3421
Z91	1	AUX CONTACTS A37
Z92	1	PRC ADJ TO CURRENT
Z93	1	fuses for the job
Z94	1	AUX CONTACTS
C33	1	RED 14 GAUGE WIRE
CADrawings	1	CA Drawings by Plant
AsBuiltDrawings	1	As built drawings with certified test report
Z95	1	key pad (HMI) on the door
C7	1	C7-With 300 VA extra capacity CPT, 120V/60HZ, 110V 50HZ secondary w/2 primary & 1 secondary fuse
H3	1	Space Heater and N.C. Interlock (150 watt)
C14	2	C14-4 Pole Control Relay, (Unwired without diagram), A570 Rating - 120V Coil (2NO/2NC)
C23	1	C23-Current Transformers, 3 Phases
E8	1	Service Entrance Rating (Ground)
F3	3	F3-600V Single Pole Fuse Holder (Unwired without diagram)
P1	1	P1-Push-to-Test pilot Light(red RUN) Wired to Coil
P5	1	P5-PB EMERGENCY STOP - mushroom heade type
P9	1	P9-PB - START
W12	1	W12-Reduced Copy of Custom Wiring Diagram Laminated on Inside of Door

Eaton Selling Policy 25-000 applies.

If Eaton and the buyer entity listed on this purchase order have a separate executed written agreement for the products/services herein, then that agreement applies. Otherwise, Eaton's Selling Policy 25000 (<https://www.eaton.com/ca/en-gb/support/terms-conditions.html>) controls and supersedes all prior correspondence or communications between Eaton and the buyer, and any additional or different terms proposed by the buyer are rejected.

All orders must be released for manufacture within 90 days of date of order entry. If approval drawings are required, drawings must be returned approved for release within 60 days of mailing. If drawings are not returned accordingly, and/or if shipment is delayed for any reason, the price of the order will increase by 1.0% per month or fraction thereof for the time the shipment is delayed.

Seller shall not be responsible for any failure to perform, or delay in performance of, its obligations resulting from the COVID-19 pandemic or any future epidemic, and Buyer shall not be entitled to any damages resulting thereof.

Comments & Clarifications

Standard Eaton Witness Test
Price is PER DAY

The information on this document is created by Eaton Corporation. It is disclosed in confidence and it is only to be used for the purpose in which it is supplied.	PREPARED BY Jacob Simonsen		DATE 8/19/2026	 Powering Business Worldwide	
	APPROVED BY		DATE		
	VERSION 1.0.1.2		TYPE NSP2		DRAWING TYPE Customer Appr.
NEG-ALT Number RH130721X6K2-0005	REVISION 0	DWG SIZE A		G.O.	ITEM
					SHEET 1 of 1

Medium Voltage Assemblies General Information

System Parameters

System Voltage:	4160	System Grounding:	Low Resistance
Short Circuit Rating:	50 kA	BIL:	60
Phase Sequence:	123		

Main Bus Specifications

Bus Insulation	Fluidized Bed Epoxy	Amps:	1200
Bus Support Insulation:	Epoxy	Bus Plating:	Silver
Ground Bus:	0.25 x 2	Ground Bus Plating:	Silver
Neutral Bus:	None		

Structure Specifications

Enclosure Type:	Indoor	Rodent Proof:	No
Design Type:	2-high Arc-Res	Drip Proof Roof:	No
Front Door Latching:	Type 2B IEEE C37.20.7	Base Channel:	No
Interior Paint Color:	ANSI-61 Light Grey	Door Gaskets:	No
Exterior Paint Color:	ANSI-61 Light Grey	Outdoor House:	No
Rear Door Access:	Covers	Floor Plate:	Steel
Dust Proof:	No		

Control Power Specifications

Breaker Control Power Source:	Customer Supplied	1st Trip Coil Voltage:	125 VDC
Charging Motor Voltage:	125 VDC	2nd Trip Coil Voltage:	None
Close Coil Voltage:	125 VDC	U/V Trip Coil Voltage:	125 VDC

Wiring Specifications

Control Wire Gauge:	Standard #14	Control Wire Color:	Gray
CT Wire Gauge:	Special #10	CT Wire Color:	Gray
Gnd Wire Gauge:	Standard #14	Gnd Wire Color:	Green
Wiring Type:	Wire ID	Terminal Type:	Insulated Lock-Fork
Marker Type:	Sleeved	Type of Transfer:	None

Applicable Standards

Seismic Zone:	IBC/CBC Seismic Qualified	3rd Party Certification:	UL
California Code:	No	Chicago Code:	No

Total of 3 Structures, Total Width of 108 Inches

Split #	Struct #	Width	Height	Depth	Description
1	1	36.00	127.00	97.50	Breakers Structure
1	2	36.00	127.00	97.50	Breakers Structure,Auxilliary over Breaker
1	3	36.00	127.00	97.50	Breakers Structure


Shipping Split Totals:

The information on this document is created by Eaton. It is disclosed in confidence and it is only to be used for the purpose in which it is supplied.	PREPARED BY RH13		DATE 8/19/2026	Eaton Greenwood, SC		
	APPROVED BY		DATE	JOB NAME Linde Phoenix AZ TSMC Phases AP21-1+ 5		
				DESIGNATION 14-ES9486.1A		
	VERSION 7.4.0.27		TYPE Medium Voltage Assemblies	DRAWING TYPE Customer Appr.		
NEG-ALT Number RH130721X6K2-0005	REVISION 0	DWG SIZE A	G.O.	ITEM	SHEET 1 of 4	

Structure Weight = 9100 Breaker Weight = 480 for 1 Breakers Width = 108

The information on this document is created by Eaton. It is disclosed in confidence and it is only to be used for the purpose in which it is supplied.

The information on this document is created by Eaton. It is disclosed in confidence and it is only to be used for the purpose in which it is supplied.	PREPARED BY		DATE	Eaton Greenwood, SC		
	RH13		8/19/2026			
	APPROVED BY		DATE	JOB NAME	Linde Phoenix AZ TSMC Phases AP21-1+ 5	
				DESIGNATION	14-ES9486.1A	
	VERSION		TYPE		DRAWING TYPE	
	7.4.0.27		Medium Voltage Assemblies		Customer Appr.	
NEG-ALT Number	REVISION	DWG SIZE		G.O.		SHEET
RH130721X6K2-0005	0	A				2 of 4

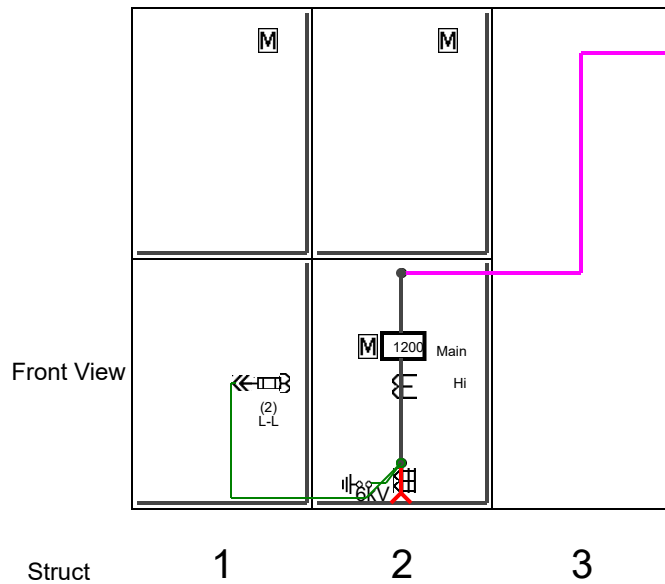

Structure	1	2	3			
Ship-Inches			108			
Ship-MM			2743			
Width-Inches	36	36	36			
Width-MM	914	914	914			
Depth-Inches	97.50	97.50	97.50			
Depth-MM	2476	2476	2476			
Height-Inches	127	127	127			
Height-MM	3225	3225	3225			
Weight-Lbs	3150	3280	3150			
Weight-Kg	1428	1487	1428			

The information on this document is created by Eaton. It is disclosed in confidence and it is only to be used for the purpose in which it is supplied.

PREPARED BY		DATE	Eaton Greenwood, SC		
RH13		8/19/2026			
APPROVED BY		DATE	JOB NAME Linde Phoenix AZ TSMC Phases AP21-1+ 5		
			DESIGNATION 14-ES9486.1A		
VERSION 7.4.0.27		TYPE Medium Voltage Assemblies		DRAWING TYPE Customer Appr.	
REVISION 0	DWG SIZE A		G.O.	ITEM	SHEET 3 of 4

Medium Voltage Assemblies Units Information

Str#	Unit	Description/Modifications
1	B	Blank
	D	Voltage transformer 5 kV
2	B	Lightning arrester distribution class 6 kV - Set of 3
	D	Blank Breaker Compartment 5 VCP-W 50kA 1200A
3		

The information on this document is created by Eaton. It is disclosed in confidence and it is only to be used for the purpose in which it is supplied.

PREPARED BY		DATE	Eaton Greenwood, SC		
RH13		8/19/2026			
APPROVED BY		DATE	JOB NAME Linde Phoenix AZ TSMC Phases AP21-1+ 5		
			DESIGNATION 14-ES9486.1A		
VERSION 7.4.0.27			TYPE Medium Voltage Assemblies		DRAWING TYPE Customer Appr.
REVISION 0	DWG SIZE A		G.O.		ITEM
					SHEET 4 of 4

Medium Voltage Assemblies General Information

System Parameters

System Voltage:	4160	System Grounding:	Low Resistance
Short Circuit Rating:	50 kA	BIL:	60
Phase Sequence:	123		

Main Bus Specifications

Bus Insulation	Fluidized Bed Epoxy	Amps:	1200
Bus Support Insulation:	Epoxy	Bus Plating:	Silver
Ground Bus:	0.25 x 2	Ground Bus Plating:	Silver
Neutral Bus:	None		

Structure Specifications

Enclosure Type:	Indoor	Rodent Proof:	No
Design Type:	2-high Arc-Res	Drip Proof Roof:	No
Front Door Latching:	Type 2B IEEE C37.20.7	Base Channel:	No
Interior Paint Color:	ANSI-61 Light Grey	Door Gaskets:	No
Exterior Paint Color:	ANSI-61 Light Grey	Outdoor House:	No
Rear Door Access:	Covers	Floor Plate:	Steel
Dust Proof:	No		

Control Power Specifications

Breaker Control Power Source:	Customer Supplied	1st Trip Coil Voltage:	125 VDC
Charging Motor Voltage:	125 VDC	2nd Trip Coil Voltage:	None
Close Coil Voltage:	125 VDC	U/V Trip Coil Voltage:	125 VDC

Wiring Specifications

Control Wire Gauge:	Standard #14	Control Wire Color:	Gray
CT Wire Gauge:	Special #10	CT Wire Color:	Gray
Gnd Wire Gauge:	Standard #14	Gnd Wire Color:	Green
Wiring Type:	Wire ID	Terminal Type:	Insulated Lock-Fork
Marker Type:	Sleeved	Type of Transfer:	None

Applicable Standards

Seismic Zone:	IBC/CBC Seismic Qualified	3rd Party Certification:	UL
California Code:	No	Chicago Code:	No

Total of 3 Structures, Total Width of 108 Inches

Split #	Struct #	Width	Height	Depth	Description
1	1	36.00	127.00	97.50	Breakers Structure
1	2	36.00	127.00	97.50	Breakers Structure,Auxilliary over Breaker
1	3	36.00	127.00	97.50	Breakers Structure


Shipping Split Totals:

The information on this document is created by Eaton. It is disclosed in confidence and it is only to be used for the purpose in which it is supplied.	PREPARED BY		DATE	Eaton Greenwood, SC		
	RH13		8/19/2026			
	APPROVED BY		DATE	JOB NAME Linde Phoenix AZ TSMC Phases AP21-1+ 5		
				DESIGNATION 14-ES9486.1B		
	VERSION 7.4.0.27		TYPE Medium Voltage Assemblies		DRAWING TYPE Customer Appr.	
NEG-ALT Number RH130721X6K2-0005	REVISION 0	DWG SIZE A		G.O.	ITEM	SHEET 1 of 4

Structure Weight = 9100 Breaker Weight = 480 for 1 Breakers Width = 108

The information on this document is created by Eaton. It is disclosed in confidence and it is only to be used for the purpose in which it is supplied.

The information on this document is created by Eaton. It is disclosed in confidence and it is only to be used for the purpose in which it is supplied.	PREPARED BY		DATE	Eaton Greenwood, SC	
	RH13		8/19/2026		
	APPROVED BY		DATE	JOB NAME	
				DESIGNATION	
				Linde Phoenix AZ TSMC Phases AP21-1+ 5	
				14-ES9486.1B	
	VERSION		TYPE		DRAWING TYPE
	7.4.0.27		Medium Voltage Assemblies		Customer Appr.
NEG-ALT Number	REVISION	DWG SIZE	G.O.	ITEM	SHEET
RH130721X6K2-0005	0	A			2 of 4

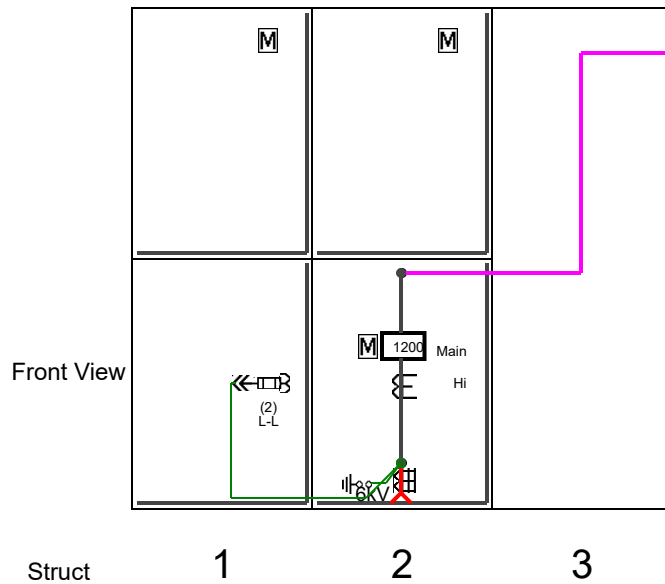

Structure	1	2	3			
Ship-Inches			108			
Ship-MM			2743			
Width-Inches	36	36	36			
Width-MM	914	914	914			
Depth-Inches	97.50	97.50	97.50			
Depth-MM	2476	2476	2476			
Height-Inches	127	127	127			
Height-MM	3225	3225	3225			
Weight-Lbs	3150	3280	3150			
Weight-Kg	1428	1487	1428			

The information on this document is created by Eaton. It is disclosed in confidence and it is only to be used for the purpose in which it is supplied.

PREPARED BY RH13	DATE 8/19/2026	Eaton Greenwood, SC			
APPROVED BY	DATE	JOB NAME Linde Phoenix AZ TSMC Phases AP21-1+ 5	DESIGNATION 14-ES9486.1B		
VERSION 7.4.0.27	TYPE Medium Voltage Assemblies		DRAWING TYPE Customer Appr.		
NEG-ALT Number RH130721X6K2-0005	REVISION 0	DWG SIZE A	G.O.	ITEM	SHEET 3 of 4

Medium Voltage Assemblies Units Information

Str#	Unit	Description/Modifications
1	B	Blank
	D	Voltage transformer 5 kV
2	B	Lightning arrester distribution class 6 kV - Set of 3
	D	Blank Breaker Compartment 5 VCP-W 50kA 1200A
3		

The information on this document is created by Eaton. It is disclosed in confidence and it is only to be used for the purpose in which it is supplied.

PREPARED BY RH13	DATE 8/19/2026	Eaton Greenwood, SC			
APPROVED BY	DATE	JOB NAME DESIGNATION	Linde Phoenix AZ TSMC Phases AP21-1+ 5 14-ES9486.1B		
VERSION 7.4.0.27		TYPE Medium Voltage Assemblies	DRAWING TYPE Customer Appr.		
NEG-ALT Number RH130721X6K2-0005	REVISION 0	DWG SIZE A	G.O.	ITEM	SHEET 4 of 4

Medium Voltage Assemblies General Information

System Parameters

System Voltage:	4160	System Grounding:	Low Resistance
Short Circuit Rating:	50 kA	BIL:	60
Phase Sequence:	123		

Main Bus Specifications

Bus Insulation	Fluidized Bed Epoxy	Amps:	1200
Bus Support Insulation:	Epoxy	Bus Plating:	Silver
Ground Bus:	0.25 x 2	Ground Bus Plating:	Silver
Neutral Bus:	None		

Structure Specifications

Enclosure Type:	Indoor	Rodent Proof:	No
Design Type:	2-high Arc-Res	Drip Proof Roof:	No
Front Door Latching:	Type 2B IEEE C37.20.7	Base Channel:	No
Interior Paint Color:	ANSI-61 Light Grey	Door Gaskets:	No
Exterior Paint Color:	ANSI-61 Light Grey	Outdoor House:	No
Rear Door Access:	Covers	Floor Plate:	Steel
Dust Proof:	No		

Control Power Specifications

Breaker Control Power Source:	Customer Supplied	1st Trip Coil Voltage:	125 VDC
Charging Motor Voltage:	125 VDC	2nd Trip Coil Voltage:	None
Close Coil Voltage:	125 VDC	U/V Trip Coil Voltage:	125 VDC

Wiring Specifications

Control Wire Gauge:	Standard #14	Control Wire Color:	Gray
CT Wire Gauge:	Special #10	CT Wire Color:	Gray
Gnd Wire Gauge:	Standard #14	Gnd Wire Color:	Green
Wiring Type:	Wire ID	Terminal Type:	Insulated Lock-Fork
Marker Type:	Sleeved	Type of Transfer:	None

Applicable Standards

Seismic Zone:	IBC/CBC Seismic Qualified	3rd Party Certification:	UL
California Code:	No	Chicago Code:	No

Total of 3 Structures, Total Width of 108 Inches

Split #	Struct #	Width	Height	Depth	Description
1	1	36.00	127.00	97.50	Breakers Structure
1	2	36.00	127.00	97.50	Breakers Structure,Auxilliary over Breaker
1	3	36.00	127.00	97.50	Breakers Structure


Shipping Split Totals:

The information on this document is created by Eaton. It is disclosed in confidence and it is only to be used for the purpose in which it is supplied.	PREPARED BY RH13		DATE 8/19/2026	Eaton Greenwood, SC		
	APPROVED BY		DATE	JOB NAME Linde Phoenix AZ TSMC Phases AP21-1+ 5		
				DESIGNATION 14-ES9486.1C		
	VERSION 7.4.0.27			TYPE Medium Voltage Assemblies		DRAWING TYPE Customer Appr.
NEG-ALT Number RH130721X6K2-0005	REVISION 0	DWG SIZE A	G.O.	ITEM	SHEET 1 of 4	

Structure Weight = 9100 Breaker Weight = 480 for 1 Breakers Width = 108

The information on this document is created by Eaton. It is disclosed in confidence and it is only to be used for the purpose in which it is supplied.

The information on this document is created by Eaton. It is disclosed in confidence and it is only to be used for the purpose in which it is supplied.	PREPARED BY		DATE	Eaton Greenwood, SC	
	RH13		8/19/2026		
	APPROVED BY		DATE	JOB NAME	
				DESIGNATION	
				Linde Phoenix AZ TSMC Phases AP21-1+ 5	
				14-ES9486.1C	
	VERSION		TYPE		DRAWING TYPE
	7.4.0.27		Medium Voltage Assemblies		Customer Appr.
NEG-ALT Number	REVISION	DWG SIZE		G.O.	SHEET
RH130721X6K2-0005	0	A			2 of 4

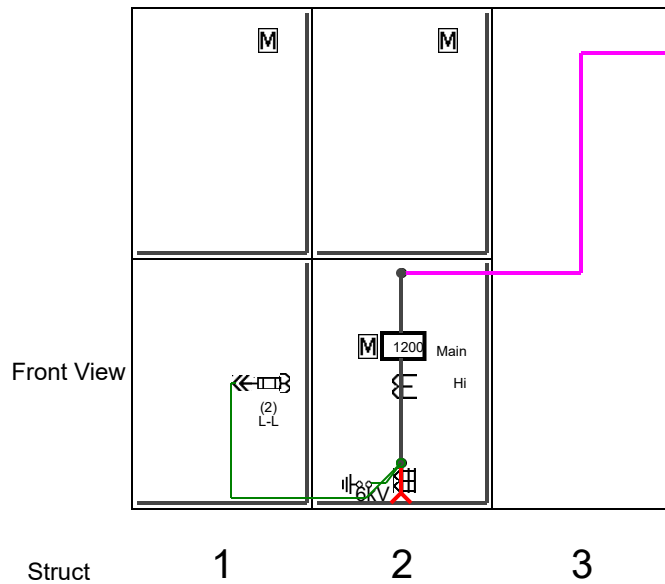

Structure	1	2	3			
Ship-Inches			108			
Ship-MM			2743			
Width-Inches	36	36	36			
Width-MM	914	914	914			
Depth-Inches	97.50	97.50	97.50			
Depth-MM	2476	2476	2476			
Height-Inches	127	127	127			
Height-MM	3225	3225	3225			
Weight-Lbs	3150	3280	3150			
Weight-Kg	1428	1487	1428			

The information on this document is created by Eaton. It is disclosed in confidence and it is only to be used for the purpose in which it is supplied.

PREPARED BY RH13	DATE 8/19/2026	Eaton Greenwood, SC			
APPROVED BY	DATE	JOB NAME Linde Phoenix AZ TSMC Phases AP21-1+ 5	DESIGNATION 14-ES9486.1C		
VERSION 7.4.0.27	TYPE Medium Voltage Assemblies		DRAWING TYPE Customer Appr.		
NEG-ALT Number RH130721X6K2-0005	REVISION 0	DWG SIZE A	G.O.	ITEM	SHEET 3 of 4

Medium Voltage Assemblies Units Information

Str#	Unit	Description/Modifications
1	B	Blank
	D	Voltage transformer 5 kV
2	B	Lightning arrester distribution class 6 kV - Set of 3
	D	Blank Breaker Compartment 5 VCP-W 50kA 1200A
3		

The information on this document is created by Eaton. It is disclosed in confidence and it is only to be used for the purpose in which it is supplied.

PREPARED BY		DATE	Eaton Greenwood, SC		
RH13		8/19/2026			
APPROVED BY		DATE	JOB NAME Linde Phoenix AZ TSMC Phases AP21-1+ 5		
			DESIGNATION 14-ES9486.1C		
VERSION 7.4.0.27		TYPE Medium Voltage Assemblies		DRAWING TYPE Customer Appr.	
REVISION 0	DWG SIZE A		G.O.	ITEM	SHEET 4 of 4

Medium Voltage Assemblies General Information

System Parameters

System Voltage:	4160	System Grounding:	Low Resistance
Short Circuit Rating:	50 kA	BIL:	60
Phase Sequence:	123		

Main Bus Specifications

Bus Insulation	Fluidized Bed Epoxy	Amps:	1200
Bus Support Insulation:	Epoxy	Bus Plating:	Silver
Ground Bus:	0.25 x 2	Ground Bus Plating:	Silver
Neutral Bus:	None		

Structure Specifications

Enclosure Type:	Indoor	Rodent Proof:	No
Design Type:	2-high Arc-Res	Drip Proof Roof:	No
Front Door Latching:	Type 2B IEEE C37.20.7	Base Channel:	No
Interior Paint Color:	ANSI-61 Light Grey	Door Gaskets:	No
Exterior Paint Color:	ANSI-61 Light Grey	Outdoor House:	No
Rear Door Access:	Covers	Floor Plate:	Steel
Dust Proof:	No		

Control Power Specifications

Breaker Control Power Source:	Customer Supplied	1st Trip Coil Voltage:	125 VDC
Charging Motor Voltage:	125 VDC	2nd Trip Coil Voltage:	None
Close Coil Voltage:	125 VDC	U/V Trip Coil Voltage:	125 VDC

Wiring Specifications

Control Wire Gauge:	Standard #14	Control Wire Color:	Gray
CT Wire Gauge:	Special #10	CT Wire Color:	Gray
Gnd Wire Gauge:	Standard #14	Gnd Wire Color:	Green
Wiring Type:	Wire ID	Terminal Type:	Insulated Lock-Fork
Marker Type:	Sleeved	Type of Transfer:	None

Applicable Standards

Seismic Zone:	IBC/CBC Seismic Qualified	3rd Party Certification:	UL
California Code:	No	Chicago Code:	No

Total of 3 Structures, Total Width of 108 Inches

Split #	Struct #	Width	Height	Depth	Description
1	1	36.00	127.00	97.50	Breakers Structure
1	2	36.00	127.00	97.50	Breakers Structure,Auxilliary over Breaker
1	3	36.00	127.00	97.50	Breakers Structure


Shipping Split Totals:

The information on this document is created by Eaton. It is disclosed in confidence and it is only to be used for the purpose in which it is supplied.	PREPARED BY		DATE	Eaton Greenwood, SC		
	RH13		8/19/2026			
	APPROVED BY		DATE	JOB NAME Linde Phoenix AZ TSMC Phases AP21-1+ 5		
				DESIGNATION 16-ES9486.1A		
	VERSION		TYPE		DRAWING TYPE	
	7.4.0.27		Medium Voltage Assemblies		Customer Appr.	
NEG-ALT Number	REVISION		DWG SIZE	G.O.	ITEM	SHEET
RH130721X6K2-0005	0		A			1 of 4

Structure Weight = 9100 Breaker Weight = 480 for 1 Breakers Width = 108

The information on this document is created by Eaton. It is disclosed in confidence and it is only to be used for the purpose in which it is supplied.

The information on this document is created by Eaton. It is disclosed in confidence and it is only to be used for the purpose in which it is supplied.	PREPARED BY	DATE	Eaton Greenwood, SC		
	RH13	8/19/2026			
	APPROVED BY	DATE	JOB NAME	Linde Phoenix AZ TSMC Phases AP21-1+ 5	
			DESIGNATION	16-ES9486.1A	
	VERSION		TYPE	DRAWING TYPE	
	7.4.0.27		Medium Voltage Assemblies	Customer Appr.	
NEG-ALT Number	REVISION	DWG SIZE	G.O.	ITEM	SHEET
RH130721X6K2-0005	0	A			2 of 4

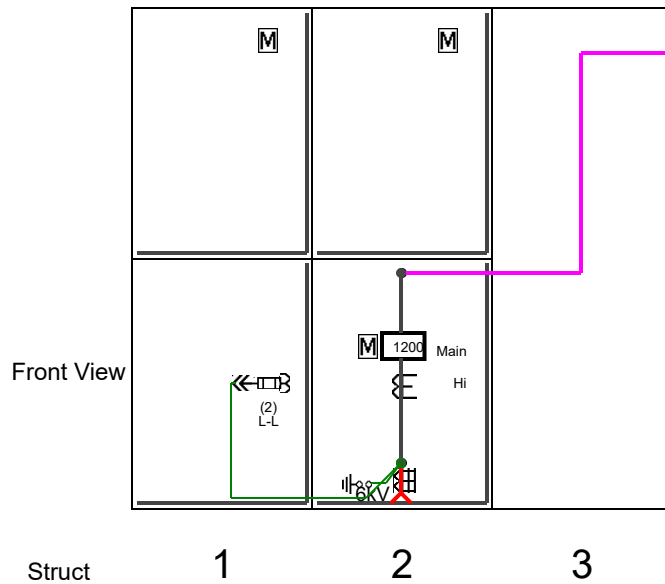

Structure	1	2	3			
Ship-Inches			108			
Ship-MM			2743			
Width-Inches	36	36	36			
Width-MM	914	914	914			
Depth-Inches	97.50	97.50	97.50			
Depth-MM	2476	2476	2476			
Height-Inches	127	127	127			
Height-MM	3225	3225	3225			
Weight-Lbs	3150	3280	3150			
Weight-Kg	1428	1487	1428			

The information on this document is created by Eaton. It is disclosed in confidence and it is only to be used for the purpose in which it is supplied.

PREPARED BY RH13	DATE 8/19/2026	Eaton Greenwood, SC			
APPROVED BY	DATE	JOB NAME Linde Phoenix AZ TSMC Phases AP21-1+ 5	DESIGNATION 16-ES9486.1A		
VERSION 7.4.0.27	TYPE Medium Voltage Assemblies		DRAWING TYPE Customer Appr.		
NEG-ALT Number RH130721X6K2-0005	REVISION 0	DWG SIZE A	G.O.	ITEM	SHEET 3 of 4

Medium Voltage Assemblies Units Information

Str#	Unit	Description/Modifications
1	B	Blank
	D	Voltage transformer 5 kV
2	B	Lightning arrester distribution class 6 kV - Set of 3
	D	Blank Breaker Compartment 5 VCP-W 50kA 1200A
3		

The information on this document is created by Eaton. It is disclosed in confidence and it is only to be used for the purpose in which it is supplied.

PREPARED BY		DATE	Eaton Greenwood, SC		
RH13		8/19/2026			
APPROVED BY		DATE	JOB NAME Linde Phoenix AZ TSMC Phases AP21-1+ 5		
			DESIGNATION 16-ES9486.1A		
VERSION 7.4.0.27		TYPE Medium Voltage Assemblies		DRAWING TYPE Customer Appr.	
REVISION 0	DWG SIZE A		G.O.		SHEET 4 of 4

Medium Voltage Assemblies General Information

System Parameters

System Voltage:	4160	System Grounding:	Low Resistance
Short Circuit Rating:	50 kA	BIL:	60
Phase Sequence:	123		

Main Bus Specifications

Bus Insulation	Fluidized Bed Epoxy	Amps:	1200
Bus Support Insulation:	Epoxy	Bus Plating:	Silver
Ground Bus:	0.25 x 2	Ground Bus Plating:	Silver
Neutral Bus:	None		

Structure Specifications

Enclosure Type:	Indoor	Rodent Proof:	No
Design Type:	2-high Arc-Res	Drip Proof Roof:	No
Front Door Latching:	Type 2B IEEE C37.20.7	Base Channel:	No
Interior Paint Color:	ANSI-61 Light Grey	Door Gaskets:	No
Exterior Paint Color:	ANSI-61 Light Grey	Outdoor House:	No
Rear Door Access:	Covers	Floor Plate:	Steel
Dust Proof:	No		

Control Power Specifications

Breaker Control Power Source:	Customer Supplied	1st Trip Coil Voltage:	125 VDC
Charging Motor Voltage:	125 VDC	2nd Trip Coil Voltage:	None
Close Coil Voltage:	125 VDC	U/V Trip Coil Voltage:	125 VDC

Wiring Specifications

Control Wire Gauge:	Standard #14	Control Wire Color:	Gray
CT Wire Gauge:	Special #10	CT Wire Color:	Gray
Gnd Wire Gauge:	Standard #14	Gnd Wire Color:	Green
Wiring Type:	Wire ID	Terminal Type:	Insulated Lock-Fork
Marker Type:	Sleeved	Type of Transfer:	None

Applicable Standards

Seismic Zone:	IBC/CBC Seismic Qualified	3rd Party Certification:	UL
California Code:	No	Chicago Code:	No

Total of 3 Structures, Total Width of 108 Inches


Split #	Struct #	Width	Height	Depth	Description
1	1	36.00	127.00	97.50	Breakers Structure
1	2	36.00	127.00	97.50	Breakers Structure,Auxilliary over Breaker
1	3	36.00	127.00	97.50	Breakers Structure

Shipping Split Totals:

The information on this document is created by Eaton. It is disclosed in confidence and it is only to be used for the purpose in which it is supplied.	PREPARED BY	DATE	Eaton Greenwood, SC		
	RH13	8/19/2026			
	APPROVED BY	DATE	JOB NAME	Linde Phoenix AZ TSMC Phases AP21-1+ 5	
			DESIGNATION	16-ES9486.1B	
	VERSION		TYPE	DRAWING TYPE	
	7.4.0.27		Medium Voltage Assemblies	Customer Appr.	
NEG-ALT Number	REVISION	DWG SIZE	G.O.	ITEM	SHEET
RH130721X6K2-0005	0	A			1 of 4

Structure Weight = 9100 Breaker Weight = 480 for 1 Breakers Width = 108

The information on this document is created by Eaton. It is disclosed in confidence and it is only to be used for the purpose in which it is supplied.	PREPARED BY		DATE	EatonGreenwood, SC		
	RH13		8/19/2026			
	APPROVED BY		DATE	JOB NAMELinde Phoenix AZ TSMC Phases AP21-1+ 5		
				DESIGNATION16-ES9486.1B		
	VERSION		TYPE		DRAWING TYPE	
	7.4.0.27		Medium Voltage Assemblies		Customer Appr.	
NEG-ALT Number	REVISION	DWG SIZE		G.O.	ITEM	SHEET
RH130721X6K2-0005	0	A				2 of 4

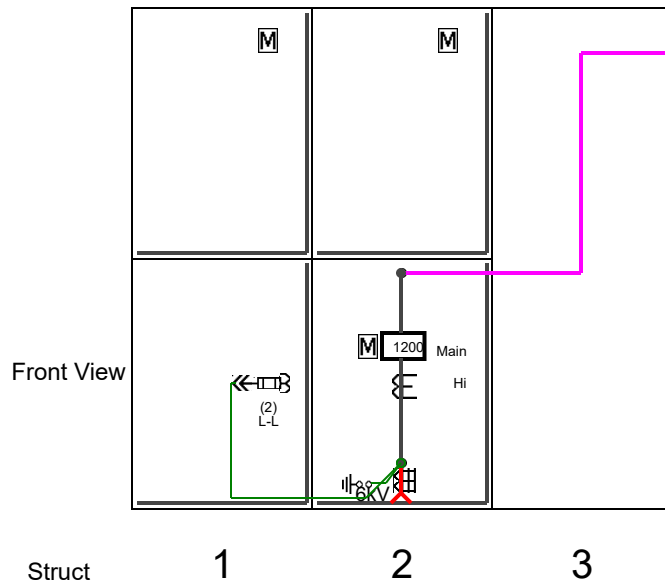

Structure	1	2	3			
Ship-Inches			108			
Ship-MM			2743			
Width-Inches	36	36	36			
Width-MM	914	914	914			
Depth-Inches	97.50	97.50	97.50			
Depth-MM	2476	2476	2476			
Height-Inches	127	127	127			
Height-MM	3225	3225	3225			
Weight-Lbs	3150	3280	3150			
Weight-Kg	1428	1487	1428			

The information on this document is created by Eaton. It is disclosed in confidence and it is only to be used for the purpose in which it is supplied.

PREPARED BY RH13	DATE 8/19/2026	Eaton Greenwood, SC			
APPROVED BY	DATE	JOB NAME Linde Phoenix AZ TSMC Phases AP21-1+ 5	DESIGNATION 16-ES9486.1B		
VERSION 7.4.0.27		TYPE Medium Voltage Assemblies		DRAWING TYPE Customer Appr.	
NEG-ALT Number RH130721X6K2-0005	REVISION 0	DWG SIZE A	G.O.	ITEM	SHEET 3 of 4

Medium Voltage Assemblies Units Information

Str#	Unit	Description/Modifications
1	B	Blank
	D	Voltage transformer 5 kV
2	B	Lightning arrester distribution class 6 kV - Set of 3
	D	Blank Breaker Compartment 5 VCP-W 50kA 1200A
3		

The information on this document is created by Eaton. It is disclosed in confidence and it is only to be used for the purpose in which it is supplied.

PREPARED BY RH13	DATE 8/19/2026	Eaton Greenwood, SC			
APPROVED BY	DATE	JOB NAME DESIGNATION	Linde Phoenix AZ TSMC Phases AP21-1+ 5 16-ES9486.1B		
VERSION 7.4.0.27		TYPE Medium Voltage Assemblies	DRAWING TYPE Customer Appr.		
NEG-ALT Number RH130721X6K2-0005	REVISION 0	DWG SIZE A	G.O.	ITEM	SHEET 4 of 4

Medium Voltage Assemblies General Information

System Parameters

System Voltage:	4160	System Grounding:	Low Resistance
Short Circuit Rating:	50 kA	BIL:	60
Phase Sequence:	123		

Main Bus Specifications

Bus Insulation	Fluidized Bed Epoxy	Amps:	1200
Bus Support Insulation:	Epoxy	Bus Plating:	Silver
Ground Bus:	0.25 x 2	Ground Bus Plating:	Silver
Neutral Bus:	None		

Structure Specifications

Enclosure Type:	Indoor	Rodent Proof:	No
Design Type:	2-high Arc-Res	Drip Proof Roof:	No
Front Door Latching:	Type 2B IEEE C37.20.7	Base Channel:	No
Interior Paint Color:	ANSI-61 Light Grey	Door Gaskets:	No
Exterior Paint Color:	ANSI-61 Light Grey	Outdoor House:	No
Rear Door Access:	Covers	Floor Plate:	Steel
Dust Proof:	No		

Control Power Specifications

Breaker Control Power Source:	Customer Supplied	1st Trip Coil Voltage:	125 VDC
Charging Motor Voltage:	125 VDC	2nd Trip Coil Voltage:	None
Close Coil Voltage:	125 VDC	U/V Trip Coil Voltage:	125 VDC

Wiring Specifications

Control Wire Gauge:	Standard #14	Control Wire Color:	Gray
CT Wire Gauge:	Special #10	CT Wire Color:	Gray
Gnd Wire Gauge:	Standard #14	Gnd Wire Color:	Green
Wiring Type:	Wire ID	Terminal Type:	Insulated Lock-Fork
Marker Type:	Sleeved	Type of Transfer:	None

Applicable Standards

Seismic Zone:	IBC/CBC Seismic Qualified	3rd Party Certification:	UL
California Code:	No	Chicago Code:	No

Total of 3 Structures, Total Width of 108 Inches

Split #	Struct #	Width	Height	Depth	Description
1	1	36.00	127.00	97.50	Breakers Structure
1	2	36.00	127.00	97.50	Breakers Structure,Auxilliary over Breaker
1	3	36.00	127.00	97.50	Breakers Structure


Shipping Split Totals:

The information on this document is created by Eaton. It is disclosed in confidence and it is only to be used for the purpose in which it is supplied.	PREPARED BY		DATE	Eaton Greenwood, SC		
	RH13		8/19/2026			
	APPROVED BY		DATE	JOB NAME Linde Phoenix AZ TSMC Phases AP21-1+ 5		
				DESIGNATION 16-ES9486.1C		
	VERSION 7.4.0.27		TYPE Medium Voltage Assemblies		DRAWING TYPE Customer Appr.	
NEG-ALT Number RH130721X6K2-0005	REVISION 0	DWG SIZE A		G.O.	ITEM	SHEET 1 of 4

Structure Weight = 9100 Breaker Weight = 480 for 1 Breakers Width = 108

The information on this document is created by Eaton. It is disclosed in confidence and it is only to be used for the purpose in which it is supplied.

The information on this document is created by Eaton. It is disclosed in confidence and it is only to be used for the purpose in which it is supplied.	PREPARED BY		DATE	Eaton Greenwood, SC	
	RH13		8/19/2026		
	APPROVED BY		DATE	JOB NAME	
				DESIGNATION	
				Linde Phoenix AZ TSMC Phases AP21-1+ 5	
				16-ES9486.1C	
	VERSION		TYPE		DRAWING TYPE
	7.4.0.27		Medium Voltage Assemblies		Customer Appr.
NEG-ALT Number	REVISION	DWG SIZE		G.O.	ITEM
RH130721X6K2-0005	0	A			SHEET
					2 of 4

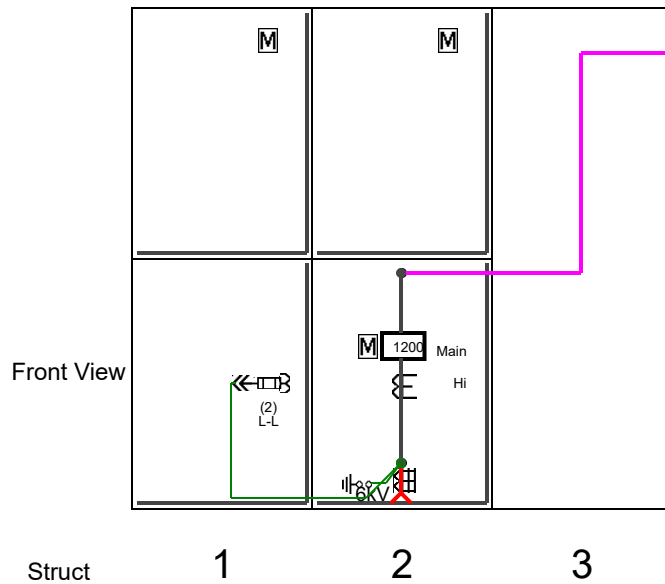

Structure	1	2	3			
Ship-Inches			108			
Ship-MM			2743			
Width-Inches	36	36	36			
Width-MM	914	914	914			
Depth-Inches	97.50	97.50	97.50			
Depth-MM	2476	2476	2476			
Height-Inches	127	127	127			
Height-MM	3225	3225	3225			
Weight-Lbs	3150	3280	3150			
Weight-Kg	1428	1487	1428			

The information on this document is created by Eaton. It is disclosed in confidence and it is only to be used for the purpose in which it is supplied.

PREPARED BY RH13	DATE 8/19/2026	Eaton Greenwood, SC			
APPROVED BY	DATE	JOB NAME Linde Phoenix AZ TSMC Phases AP21-1+ 5	DESIGNATION 16-ES9486.1C		
VERSION 7.4.0.27		TYPE Medium Voltage Assemblies		DRAWING TYPE Customer Appr.	
NEG-ALT Number RH130721X6K2-0005	REVISION 0	DWG SIZE A	G.O.	ITEM	SHEET 3 of 4

Medium Voltage Assemblies Units Information

Str#	Unit	Description/Modifications
1	B	Blank
	D	Voltage transformer 5 kV
2	B	Lightning arrester distribution class 6 kV - Set of 3
	D	Blank Breaker Compartment 5 VCP-W 50kA 1200A
3		

The information on this document is created by Eaton. It is disclosed in confidence and it is only to be used for the purpose in which it is supplied.

PREPARED BY RH13	DATE 8/19/2026	Eaton Greenwood, SC			
APPROVED BY	DATE	JOB NAME DESIGNATION	Linde Phoenix AZ TSMC Phases AP21-1+ 5 16-ES9486.1C		
VERSION 7.4.0.27		TYPE Medium Voltage Assemblies	DRAWING TYPE Customer Appr.		
NEG-ALT Number RH130721X6K2-0005	REVISION 0	DWG SIZE A	G.O.	ITEM	SHEET 4 of 4

Comments & Clarifications

The information on this document is created by Eaton Corporation. It is disclosed in confidence and it is only to be used for the purpose in which it is supplied.	PREPARED BY Jacob Simonsen		DATE 8/19/2026	 <i>Powering Business Worldwide</i>	
	APPROVED BY		DATE	JOB NAME Linde Phoenix AZ TSMC Phases AP21-1+ 5	
	VERSION 1.0.1.2			DESIGNATION 3-days WT	
			TYPE NSP2	DRAWING TYPE Customer Appr.	
NEG-ALT Number RH130721X6K2-0005	REVISION 0	DWG SIZE A	G.O.	ITEM	SHEET 1 of 1

Ampgard Medium Voltage Motor Control General Information

Specification

Service Voltage:	4160	Enclosure Type:	Ampgard AR-50kA
Labeling:	UL	Altitude:	-3280.8FT to 3280.8FT (-1000M to 1000M)
Fuse Mounting:	Bolt-In	Contactor Electrical Connection:	Bolt-In 400A, Stab-In 800A
Symmetrical kA Rating:	50		

Bus Specification

Main Horizontal Bus:	1200	Bus Density:	Standard
Plating:	Silver Plating, Complete Bus	Insulated:	Yes
Ground Bus 1/4" x 2", 600A:		Ground Bus Plating:	Silver
Left Side Coordination:	MV Switchgear	Left Connection Type:	Bolted
Right Side Coordination:	None	Right Connection Type:	
Breaker Alignment:	No Breaker In Line-up		

Global Specifications

Seismic Rated (6" Clearance):	No	Steel Bottom:	Yes
Channel Sills:	None	Mimic Bus:	No
Back to Back:	No	Aluminum Lead Plates:	No
Exterior Paint:	ANSI-61 Light Gray	Interior Paint:	
Window In All Starter Doors:		Window In All LBS Doors:	No

Miscellaneous Specifications

Nameplate Material:			
Nameplate Color:	Black on White		
Compartment Interior Markers:	Typed Vinyl Tape (White w/Black Letters)		
Back of Door Markers:	None		
Starter Lift Truck:	No	Breaker/Starter Lift Dolly:	No
Breaker Only Dolly:	No	Additional O&M Manuals:	
Witness Testing		Customer Inspection	

Wiring Options

Wire Markers:	Sleeve Type	Wire Terminals:	Locking Fork
Control Wire Gauge:	#14	Controls Wire Color:	Red
CT Wire Gauge:	#12	CT Wire Color:	Color Coded
Ground Wire Color:	Green Yellow stripe	Conduit:	
Spare Contacts Wired Out:			

Space Heater Bus

Cubicle Space Heater Bus:	None	Motor Space Heater Bus:	None
---------------------------	------	-------------------------	------

Two Wire Bus

DC Bus:	Yes	Communications Bus:	
UPS Bus:		Test Power Bus:	No
Control Power Bus:	No	Other Two Wire Bus:	

Other Buses


PT Bus:	Yes	Other Three Wire Bus:	
Other Four Wire Bus:			

Lugs

Main Lugs Type:	None	Line-Up Ground Lugs:	No
Load Lugs Type:	Crimp Type 2 Hole		
Ground Lugs Type:	Crimp Type 2 Hole		


Lead-Time:U

The information on this document is created by Eaton. It is disclosed in confidence and it is only to be used for the purpose in which it is supplied.	PREPARED BY	DATE	Eaton Asheville, NC		
	Dylan Lavallee	8/19/2026			
	APPROVED BY	DATE	JOB NAME	Linde Phoenix AZ TSMC Phases AP21-1+ 5	
			DESIGNATION	14-ES9486.1A	
	VERSION		TYPE	DRAWING TYPE	
	1.2.3.4		Ampgard MV Motor Control	Customer Appr.	
NEG-ALT Number	REVISION	DWG SIZE	G.O.	ITEM	SHEET
RH130721X6K2-0005	0	A			1 of 6

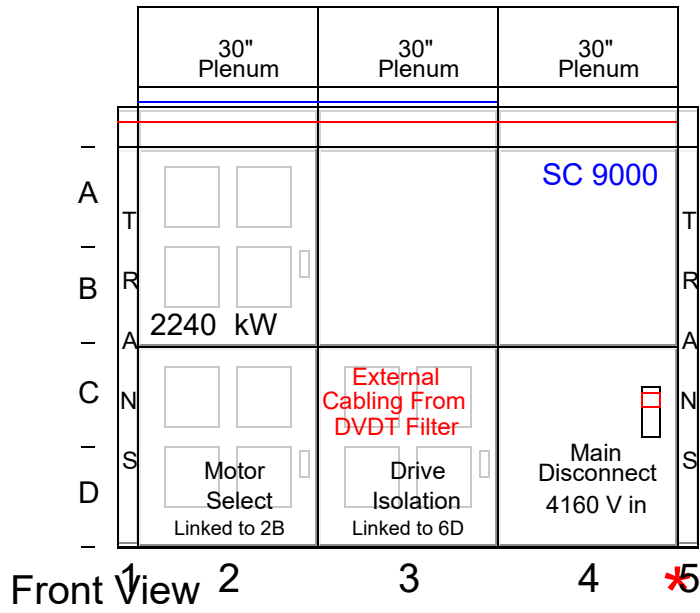



Rear Floor Plan

Connection
to
MV Switchgear

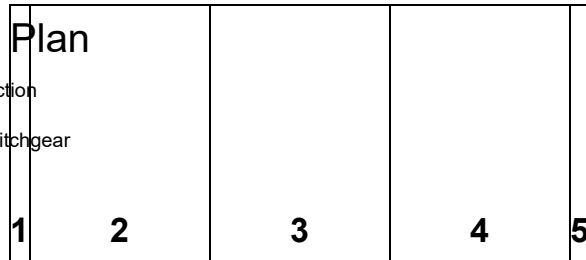

Structure	1	2	3	4	5	
Ship-Inches				112		
Ship-MM				2844		
Width-Inches	4.00	36.00	36.00	36.00	4.00	
Width-MM	101	914	914	914	101	
Depth-Inches	51	51	51	51	51	
Depth-MM	1295	1295	1295	1295	1295	
Height-Inches	100	100	92	92	92	
Height-MM	2540	2540	2336	2336	2336	
Weight-Lbs	462	3000	1000	1950	462	
Weight-Kg	209	1360	453	884	209	

The information on this document is created by Eaton. It is disclosed in confidence and it is only to be used for the purpose in which it is supplied.	PREPARED BY	DATE	Eaton Asheville, NC			
	Dylan Lavalley	8/19/2026	JOB NAME	Linde Phoenix AZ TSMC Phases AP21-1+ 5		
	APPROVED BY	DATE	DESIGNATION	14-ES9486.1A		
	VERSION		TYPE	DRAWING TYPE		
	1.2.3.4		Ampgard MV Motor Control	Customer Appr.		
NEG-ALT Number	REVISION	DWG SIZE	G.O.	ITEM	SHEET	
RH130721X6K2-0005	0	A			2 of 6	

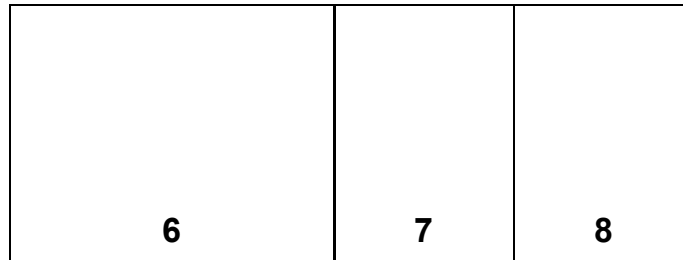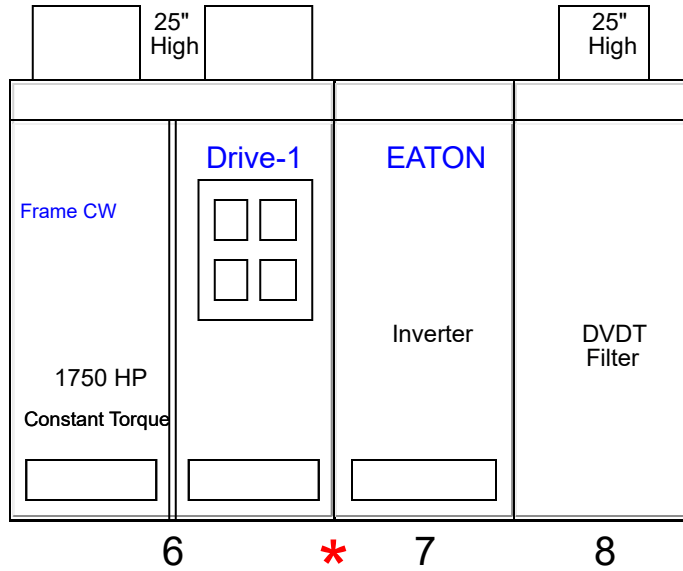

Structure	6	7	8			
Ship-Inches	69		72			
Ship-MM	1752		1828			
Width-Inches	65.00	36.00	36.00			
Width-MM	1651	914	914			
Depth-Inches	51	51	51			
Depth-MM	1295	1295	1295			
Height-Inches	92	92	92			
Height-MM	2336	2336	2336			
Weight-Lbs	7985	2540	600			
Weight-Kg	3621	1152	272			

The information on this document is created by Eaton. It is disclosed in confidence and it is only to be used for the purpose in which it is supplied.	PREPARED BY	DATE	Eaton			
	Dylan Lavalley	8/19/2026	Asheville, NC			
	APPROVED BY	DATE	JOB NAME	Linde Phoenix AZ TSMC Phases AP21-1+ 5		
			DESIGNATION	14-ES9486.1A		
	VERSION		TYPE	DRAWING TYPE		
	1.2.3.4		Ampgard MV Motor Control	Customer Appr.		
NEG-ALT Number	REVISION	DWG SIZE	G.O.	ITEM	SHEET	
RH130721X6K2-0005	0	A			3 of 6	

Ampgard Medium Voltage Motor Control Line-up Information

Global Special Modifications

SEL 710-5 071050E1ABA1A7585A381 code # J6KJ

similar to LRH0027608

D26 type relays as shown in schematics

all structures include Gasketing

Str# Structure & Compartment Descriptions & Modifications

1	Incoming Line	Structure Composite Drawing:	No Composite Match	
	Unit 1D	Transition Compartment-Transition Compartment		
		Catalog Number:	BKRTRANSE	
2	Starter	Structure Composite Drawing:	No Composite Match	
	Unit 2B	Starter-400A FLA 188-400, SC9000 Sync Transfer, Output CTs		
		Catalog Number:	SC10B4BE	
		Power Units: kW		
		Entered Power Value: 2240		
		Control Power Transformer: 2 KVA		
		Mechanical Latch: None	Ride Through Circuit: 130ms	
		Space Heater Rating: None		
		Incoming Line Direction:		
		Cable Size:	Incoming Load Direction:	Bottom
			Cable Size:	500 kcmil
		Number of Cables:	Number of Cables:	1
		Ground Size:	Ground Size:	#1 AWG
		Number of Grounds:	Number of Grounds:	2
		3 Single Phase CTs		
		Starter Isolation Switch		
		Current Limiting Power Fuses		
		Main Contactor Roll-In/Roll-Out		
		Low Voltage Control Compartment		
		Set of Control Circuit Terminal Blocks		
		Interposing Relay 3NO 1NC		
		30mm (E34) Start/Stop Pushbutton		
		30mm (E34) Red Run/Close Indicating Light, LED		
		30mm (E34) Green Off/Open Indicating Light, LED		
		GFCT 50/5		
		6 Pole CT Shorting Terminal Block (has GFCT terminals)		
		FT1 Test Switch, 4 PT, 3 CT Shorting, Clear Cover		
		Schweitzer 710-5 Protection Relay for Starter		

The information on this document is created by Eaton. It is disclosed in confidence and it is only to be used for the purpose in which it is supplied.	PREPARED BY		DATE	Eaton Asheville, NC		
	Dylan Lavallee		8/19/2026			
	APPROVED BY		DATE	JOB NAME Linde Phoenix AZ TSMC Phases AP21-1+ 5		
				DESIGNATION 14-ES9486.1A		
	VERSION 1.2.3.4		TYPE Ampgard MV Motor Control		DRAWING TYPE Customer Appr.	
NEG-ALT Number RH130721X6K2-0005	REVISION 0	DWG SIZE A	G.O.		ITEM	SHEET 4 of 6

Ammeter, AC, Panel Mount, 2% for Starter
Ammeter Switch, Electro Switch 24 series for Starter
30mm (E34) Test Pushbutton
30mm (E34) Stop, Emergency Pushbutton
30mm (E34) Reset Pushbutton
30mm (E34) White Indicating Light, LED
30mm (E34) Blue Indicating Light, LED
Unit 2D AUX Contactor-Contactor With Isolation Switch

Catalog Number: ???????E

3 Starter

Structure Composite Drawing: No Composite Match

Unit 3B Auxiliary Compartment-Blank Auxiliary Compartment (Cannot be converted to a starter in the future)

Catalog Number: AC364CE

Unit 3D AUX Contactor-Contactor With Isolation Switch

Catalog Number: ???????E

4 Drive

Structure Composite Drawing: No Composite Match

Unit 4B Auxiliary Compartment-Blank Auxiliary Compartment (Cannot be converted to a starter in the future)

Catalog Number: AC364C

Unit 4D Main Disconnect-Main Disconnect

Catalog Number: MainDisconnect

5 Drive

Structure Composite Drawing: No Composite Match

Unit 5D Transition Compartment-Transition Compartment

Catalog Number: BKRTRANS

6 Drive

Structure Composite Drawing: No Composite Match

Unit 6D Drive-SC 9000 4160V 60Hz 209A input / 4160V 217 FLA output / 1750HP CT @ 40C

Catalog Number: SC903C175C00

Slot C Voltage Monitor Board
SoftMag Precharge
Lightning Arrestors, Dist. Type
Input Fused Isolation switch with vacuum contactor
Kirk Key Interlocks
Low Voltage Control Bucket
Red-Main Contactor Closed Indicating Light, LED

The information on this document is created by Eaton. It is disclosed in confidence and it is only to be used for the purpose in which it is supplied.

PREPARED BY Dylan Lavallee	DATE 8/19/2026	Eaton Asheville, NC			
APPROVED BY	DATE	JOB NAME Linde Phoenix AZ TSMC Phases AP21-1+ 5	DESIGNATION 14-ES9486.1A		
VERSION 1.2.3.4		TYPE Ampgard MV Motor Control		DRAWING TYPE Customer Appr.	
NEG-ALT Number RH130721X6K2-0005	REVISION 0	DWG SIZE A	G.O.	ITEM	SHEET 5 of 6

Green-Main Contactor Open Indicating Light, LED
Amber-Drive Fault Indicating Light, LED
Internal Control Power- 120V CPT
Internal 480V transformer for blower power

7	Drive	Structure Composite Drawing:	No Composite Match
	Unit 7D	Inverter-Inverter	
		Catalog Number:	Inverter
8	Drive	Structure Composite Drawing:	No Composite Match
	Unit 8D	Output Filter-Output Filter	
		Catalog Number:	OutputFilter

The information on this document is created by Eaton. It is disclosed in confidence and it is only to be used for the purpose in which it is supplied.	PREPARED BY Dylan Lavallee	DATE 8/19/2026	Eaton Asheville, NC		
	APPROVED BY	DATE	JOB NAME DESIGNATION	Linde Phoenix AZ TSMC Phases AP21-1+ 5 14-ES9486.1A	
	VERSION 1.2.3.4		TYPE Ampgard MV Motor Control	DRAWING TYPE Customer Appr.	
NEG-ALT Number RH130721X6K2-0005	REVISION 0	DWG SIZE A	G.O.	ITEM	SHEET 6 of 6

Ampgard Medium Voltage Motor Control General Information

Specification

Service Voltage:	4160	Enclosure Type:	Ampgard AR-50kA
Labeling:	UL	Altitude:	-3280.8FT to 3280.8FT (-1000M to 1000M)
Fuse Mounting:	Bolt-In	Contactor Electrical Connection:	Bolt-In 400A, Stab-In 800A
Symmetrical kA Rating:	50		

Bus Specification

Main Horizontal Bus:	1200	Bus Density:	Standard
Plating:	Silver Plating, Complete Bus	Insulated:	Yes
Ground Bus 1/4" x 2", 600A:		Ground Bus Plating:	Silver
Left Side Coordination:	MV Switchgear	Left Connection Type:	Bolted
Right Side Coordination:	None	Right Connection Type:	
Breaker Alignment:	No Breaker In Line-up		

Global Specifications

Seismic Rated (6" Clearance):	No	Steel Bottom:	Yes
Channel Sills:	None	Mimic Bus:	No
Back to Back:	No	Aluminum Lead Plates:	No
Exterior Paint:	ANSI-61 Light Gray	Interior Paint:	
Window In All Starter Doors:		Window In All LBS Doors:	No

Miscellaneous Specifications

Nameplate Material:			
Nameplate Color:	Black on White		
Compartment Interior Markers:	Typed Vinyl Tape (White w/Black Letters)		
Back of Door Markers:	None		
Starter Lift Truck:	No	Breaker/Starter Lift Dolly:	No
Breaker Only Dolly:	No	Additional O&M Manuals:	
Witness Testing		Customer Inspection	

Wiring Options

Wire Markers:	Sleeve Type	Wire Terminals:	Locking Fork
Control Wire Gauge:	#14	Controls Wire Color:	Red
CT Wire Gauge:	#12	CT Wire Color:	Color Coded
Ground Wire Color:	Green Yellow stripe	Conduit:	
Spare Contacts Wired Out:			

Space Heater Bus

Cubicle Space Heater Bus:	None	Motor Space Heater Bus:	None
---------------------------	------	-------------------------	------

Two Wire Bus

DC Bus:	Yes	Communications Bus:	
UPS Bus:		Test Power Bus:	No
Control Power Bus:	No	Other Two Wire Bus:	

Other Buses


PT Bus:	Yes	Other Three Wire Bus:	
Other Four Wire Bus:			

Lugs

Main Lugs Type:	None	Line-Up Ground Lugs:	No
Load Lugs Type:	Crimp Type 2 Hole		
Ground Lugs Type:	Crimp Type 2 Hole		

Lead-Time:U


The information on this document is created by Eaton. It is disclosed in confidence and it is only to be used for the purpose in which it is supplied.	PREPARED BY		DATE	EatonAsheville, NC			
	Dylan Lavallee		8/19/2026				
	APPROVED BY		DATE	JOB NAME	Linde Phoenix AZ TSMC Phases AP21-1+ 5		
				DESIGNATION	14-ES9486.1B		
	VERSION		TYPE		DRAWING TYPE		
	1.2.3.4		Ampgard MV Motor Control		Customer Appr.		
NEG-ALT Number	REVISION	DWG SIZE	G.O.	ITEM	SHEET		
RH130721X6K2-0005	0	A			1 of 6		

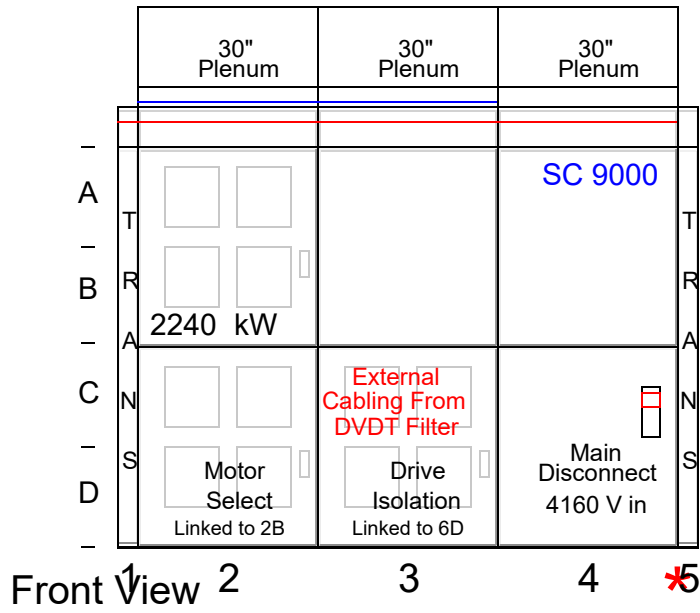

Rear



Floor Plan

Connection
to
MV Switchgear

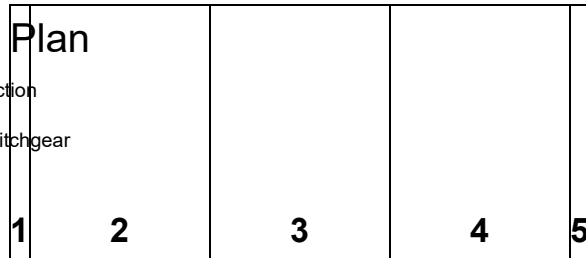

Structure	1	2	3	4	5	
Ship-Inches				112		
Ship-MM				2844		
Width-Inches	4.00	36.00	36.00	36.00	4.00	
Width-MM	101	914	914	914	101	
Depth-Inches	51	51	51	51	51	
Depth-MM	1295	1295	1295	1295	1295	
Height-Inches	100	100	92	92	92	
Height-MM	2540	2540	2336	2336	2336	
Weight-Lbs	462	3000	1000	1950	462	
Weight-Kg	209	1360	453	884	209	

The information on this document is created by Eaton. It is disclosed in confidence and it is only to be used for the purpose in which it is supplied.	PREPARED BY	DATE	Eaton			
	Dylan Lavalley	8/19/2026	Asheville, NC			
	APPROVED BY	DATE	JOB NAME	Linde Phoenix AZ TSMC Phases AP21-1+ 5		
			DESIGNATION	14-ES9486.1B		
	VERSION		TYPE	DRAWING TYPE		
	1.2.3.4		Ampgard MV Motor Control	Customer Appr.		
NEG-ALT Number	REVISION	DWG SIZE	G.O.	ITEM	SHEET	
RH130721X6K2-0005	0	A			2 of 6	

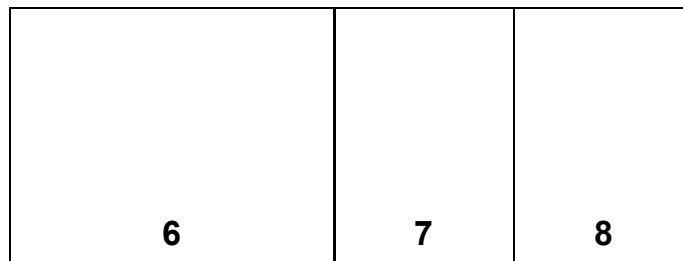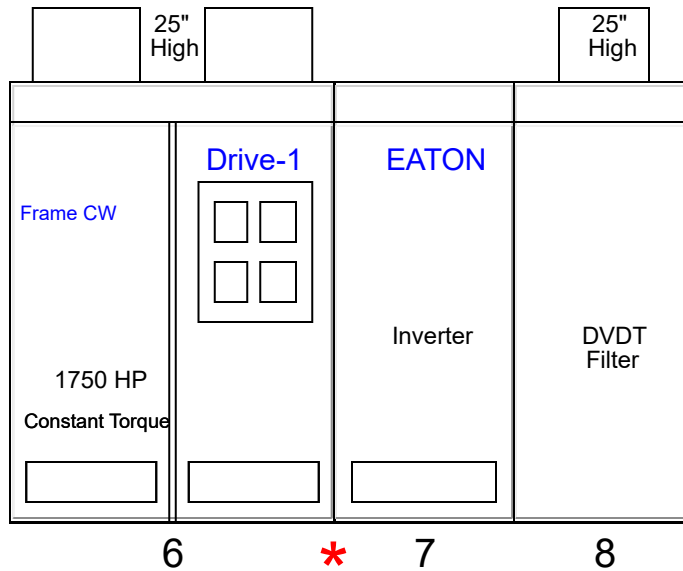

Structure	6	7	8			
Ship-Inches	69		72			
Ship-MM	1752		1828			
Width-Inches	65.00	36.00	36.00			
Width-MM	1651	914	914			
Depth-Inches	51	51	51			
Depth-MM	1295	1295	1295			
Height-Inches	92	92	92			
Height-MM	2336	2336	2336			
Weight-Lbs	7985	2540	600			
Weight-Kg	3621	1152	272			

The information on this document is created by Eaton. It is disclosed in confidence and it is only to be used for the purpose in which it is supplied.	PREPARED BY		DATE		Eaton Asheville, NC		
	Dylan Lavallee		8/19/2026				
	APPROVED BY		DATE		JOB NAME Linde Phoenix AZ TSMC Phases AP21-1+ 5		
					DESIGNATION 14-ES9486.1B		
	VERSION 1.2.3.4		TYPE Ampgard MV Motor Control			DRAWING TYPE Customer Appr.	
NEG-ALT Number RH130721X6K2-0005	REVISION 0	DWG SIZE A		G.O.		ITEM	SHEET 3 of 6

Ampgard Medium Voltage Motor Control Line-up Information

Global Special Modifications

SEL 710-5 071050E1ABA1A7585A381 code # J6KJ

similar to LRH0027608

D26 type relays as shown in schematics

all structures include Gasketing

Str# Structure & Compartment Descriptions & Modifications

1	Incoming Line	Structure Composite Drawing:	No Composite Match	
	Unit 1D	Transition Compartment-Transition Compartment		
		Catalog Number:	BKRTRANSE	
2	Starter	Structure Composite Drawing:	No Composite Match	
	Unit 2B	Starter-400A FLA 188-400, SC9000 Sync Transfer, Output CTs		
		Catalog Number:	SC10B4BE	
		Power Units: kW		
		Entered Power Value: 2240		
		Control Power Transformer: 2 KVA		
		Mechanical Latch: None	Ride Through Circuit: 130ms	
		Space Heater Rating: None		
		Incoming Line Direction:		
		Cable Size:	Incoming Load Direction:	Bottom
			Cable Size:	500 kcmil
		Number of Cables:	Number of Cables:	1
		Ground Size:	Ground Size:	#1 AWG
		Number of Grounds:	Number of Grounds:	2
		3 Single Phase CTs		
		Starter Isolation Switch		
		Current Limiting Power Fuses		
		Main Contactor Roll-In/Roll-Out		
		Low Voltage Control Compartment		
		Set of Control Circuit Terminal Blocks		
		Interposing Relay 3NO 1NC		
		30mm (E34) Start/Stop Pushbutton		
		30mm (E34) Red Run/Close Indicating Light, LED		
		30mm (E34) Green Off/Open Indicating Light, LED		
		GFCT 50/5		
		6 Pole CT Shorting Terminal Block (has GFCT terminals)		
		FT1 Test Switch, 4 PT, 3 CT Shorting, Clear Cover		
		Schweitzer 710-5 Protection Relay for Starter		

The information on this document is created by Eaton. It is disclosed in confidence and it is only to be used for the purpose in which it is supplied.	PREPARED BY		DATE	Eaton Asheville, NC			
	Dylan Lavallee		8/19/2026				
	APPROVED BY		DATE	JOB NAME	Linde Phoenix AZ TSMC Phases AP21-1+ 5		
				DESIGNATION	14-ES9486.1B		
	VERSION			TYPE	DRAWING TYPE		
	1.2.3.4			Ampgard MV Motor Control		Customer Appr.	
NEG-ALT Number	REVISION	DWG SIZE		G.O.	ITEM	SHEET	
RH130721X6K2-0005	0	A				4 of 6	

Ammeter, AC, Panel Mount, 2% for Starter
Ammeter Switch, Electro Switch 24 series for Starter
30mm (E34) Test Pushbutton
30mm (E34) Stop, Emergency Pushbutton
30mm (E34) Reset Pushbutton
30mm (E34) White Indicating Light, LED
30mm (E34) Blue Indicating Light, LED
Unit 2D AUX Contactor-Contactor With Isolation Switch

Catalog Number: ???????E

3 Starter

Structure Composite Drawing: No Composite Match

Unit 3B Auxiliary Compartment-Blank Auxiliary Compartment (Cannot be converted to a starter in the future)

Catalog Number: AC364CE

Unit 3D AUX Contactor-Contactor With Isolation Switch

Catalog Number: ???????E

4 Drive

Structure Composite Drawing: No Composite Match

Unit 4B Auxiliary Compartment-Blank Auxiliary Compartment (Cannot be converted to a starter in the future)

Catalog Number: AC364C

Unit 4D Main Disconnect-Main Disconnect

Catalog Number: MainDisconnect

5 Drive

Structure Composite Drawing: No Composite Match

Unit 5D Transition Compartment-Transition Compartment

Catalog Number: BKRTRANS

6 Drive

Structure Composite Drawing: No Composite Match

Unit 6D Drive-SC 9000 4160V 60Hz 209A input / 4160V 217 FLA output / 1750HP CT @ 40C

Catalog Number: SC903C175C00

Slot C Voltage Monitor Board
SoftMag Precharge
Lightning Arrestors, Dist. Type
Input Fused Isolation switch with vacuum contactor
Kirk Key Interlocks
Low Voltage Control Bucket
Red-Main Contactor Closed Indicating Light, LED

The information on this document is created by Eaton. It is disclosed in confidence and it is only to be used for the purpose in which it is supplied.

PREPARED BY		DATE	Eaton Asheville, NC		
Dylan Lavallee		8/19/2026			
APPROVED BY		DATE	JOB NAME	Linde Phoenix AZ TSMC Phases AP21-1+ 5	
			DESIGNATION	14-ES9486.1B	
VERSION		TYPE		DRAWING TYPE	
1.2.3.4		Ampgard MV Motor Control		Customer Appr.	
REVISION		DWG SIZE	G.O.	ITEM	SHEET
0		A			5 of 6

Green-Main Contactor Open Indicating Light, LED
Amber-Drive Fault Indicating Light, LED
Internal Control Power- 120V CPT
Internal 480V transformer for blower power

7	Drive	Structure Composite Drawing:	No Composite Match
	Unit 7D	Inverter-Inverter	
		Catalog Number:	Inverter
8	Drive	Structure Composite Drawing:	No Composite Match
	Unit 8D	Output Filter-Output Filter	
		Catalog Number:	OutputFilter

The information on this document is created by Eaton. It is disclosed in confidence and it is only to be used for the purpose in which it is supplied.	PREPARED BY Dylan Lavallee	DATE 8/19/2026	Eaton Asheville, NC		
	APPROVED BY	DATE	JOB NAME DESIGNATION	Linde Phoenix AZ TSMC Phases AP21-1+ 5 14-ES9486.1B	
	VERSION 1.2.3.4		TYPE Ampgard MV Motor Control	DRAWING TYPE Customer Appr.	
NEG-ALT Number RH130721X6K2-0005	REVISION 0	DWG SIZE A	G.O.	ITEM	SHEET 6 of 6

Ampgard Medium Voltage Motor Control General Information

Specification

Service Voltage:	4160	Enclosure Type:	Ampgard AR-50kA
Labeling:	UL	Altitude:	-3280.8FT to 3280.8FT (-1000M to 1000M)
Fuse Mounting:	Bolt-In	Contactor Electrical Connection:	Bolt-In 400A, Stab-In 800A
Symmetrical kA Rating:	50		

Bus Specification

Main Horizontal Bus:	1200	Bus Density:	Standard
Plating:	Silver Plating, Complete Bus	Insulated:	Yes
Ground Bus 1/4" x 2", 600A:		Ground Bus Plating:	Silver
Left Side Coordination:	MV Switchgear	Left Connection Type:	Bolted
Right Side Coordination:	None	Right Connection Type:	
Breaker Alignment:	No Breaker In Line-up		

Global Specifications

Seismic Rated (6" Clearance):	No	Steel Bottom:	Yes
Channel Sills:	None	Mimic Bus:	No
Back to Back:	No	Aluminum Lead Plates:	No
Exterior Paint:	ANSI-61 Light Gray	Interior Paint:	
Window In All Starter Doors:		Window In All LBS Doors:	No

Miscellaneous Specifications

Nameplate Material:			
Nameplate Color:	Black on White		
Compartment Interior Markers:	Typed Vinyl Tape (White w/Black Letters)		
Back of Door Markers:	None		
Starter Lift Truck:	No	Breaker/Starter Lift Dolly:	No
Breaker Only Dolly:	No	Additional O&M Manuals:	
Witness Testing		Customer Inspection	

Wiring Options

Wire Markers:	Sleeve Type	Wire Terminals:	Locking Fork
Control Wire Gauge:	#14	Controls Wire Color:	Red
CT Wire Gauge:	#12	CT Wire Color:	Color Coded
Ground Wire Color:	Green Yellow stripe	Conduit:	
Spare Contacts Wired Out:			

Space Heater Bus

Cubicle Space Heater Bus:	None	Motor Space Heater Bus:	None
---------------------------	------	-------------------------	------

Two Wire Bus

DC Bus:	Yes	Communications Bus:	
UPS Bus:		Test Power Bus:	No
Control Power Bus:	No	Other Two Wire Bus:	

Other Buses


PT Bus:	Yes	Other Three Wire Bus:	
Other Four Wire Bus:			

Lugs

Main Lugs Type:	None	Line-Up Ground Lugs:	No
Load Lugs Type:	Crimp Type 2 Hole		
Ground Lugs Type:	Crimp Type 2 Hole		

Lead-Time:U


The information on this document is created by Eaton. It is disclosed in confidence and it is only to be used for the purpose in which it is supplied.	PREPARED BY		DATE	Eaton Asheville, NC		
	Dylan Lavallee		8/19/2026			
	APPROVED BY		DATE	JOB NAME Linde Phoenix AZ TSMC Phases AP21-1+ 5		
				DESIGNATION 14-ES9486.1C		
	VERSION 1.2.3.4		TYPE Ampgard MV Motor Control		DRAWING TYPE Customer Appr.	
NEG-ALT Number RH130721X6K2-0005	REVISION 0	DWG SIZE A	G.O.		ITEM	SHEET 1 of 6

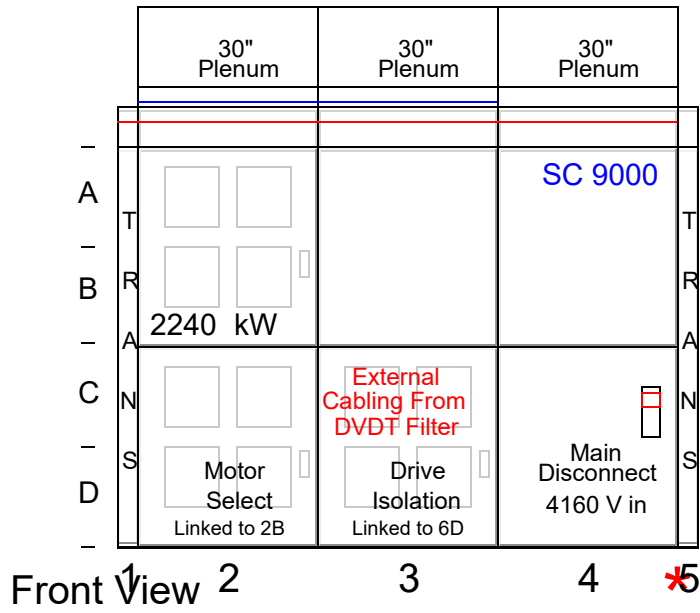

Rear



Floor Plan

Connection
to
MV Switchgear

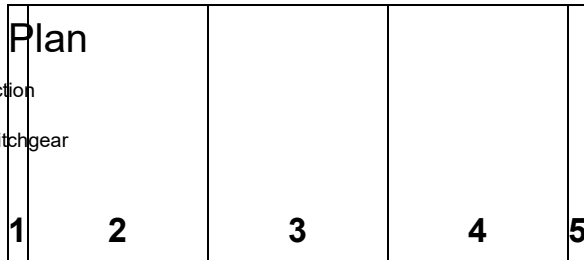

Structure	1	2	3	4	5	
Ship-Inches				112		
Ship-MM				2844		
Width-Inches	4.00	36.00	36.00	36.00	4.00	
Width-MM	101	914	914	914	101	
Depth-Inches	51	51	51	51	51	
Depth-MM	1295	1295	1295	1295	1295	
Height-Inches	100	100	92	92	92	
Height-MM	2540	2540	2336	2336	2336	
Weight-Lbs	462	3000	1000	1950	462	
Weight-Kg	209	1360	453	884	209	

The information on this document is created by Eaton. It is disclosed in confidence and it is only to be used for the purpose in which it is supplied.	PREPARED BY		DATE	Eaton Asheville, NC		
	Dylan Lavallee		8/19/2026			
	APPROVED BY		DATE	JOB NAME Linde Phoenix AZ TSMC Phases AP21-1+ 5		
				DESIGNATION 14-ES9486.1C		
	VERSION 1.2.3.4		TYPE Ampgard MV Motor Control		DRAWING TYPE Customer Appr.	
NEG-ALT Number RH130721X6K2-0005	REVISION 0	DWG SIZE A		G.O.	ITEM	SHEET 2 of 6

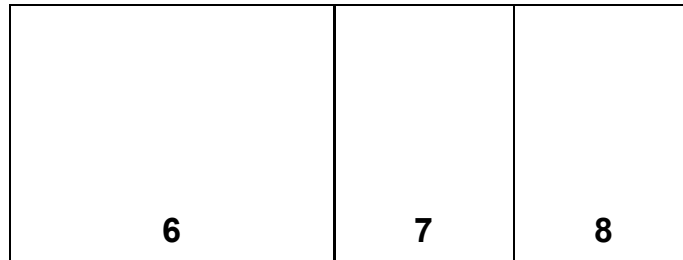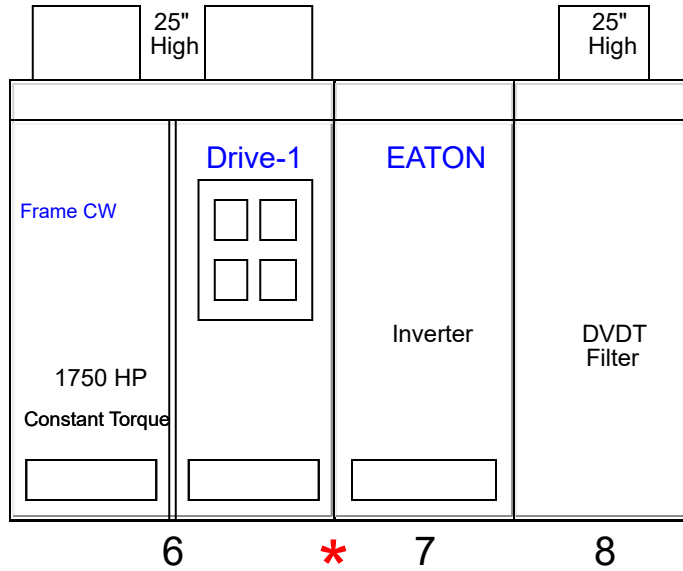

Structure	6	7	8			
Ship-Inches	69		72			
Ship-MM	1752		1828			
Width-Inches	65.00	36.00	36.00			
Width-MM	1651	914	914			
Depth-Inches	51	51	51			
Depth-MM	1295	1295	1295			
Height-Inches	92	92	92			
Height-MM	2336	2336	2336			
Weight-Lbs	7985	2540	600			
Weight-Kg	3621	1152	272			

The information on this document is created by Eaton. It is disclosed in confidence and it is only to be used for the purpose in which it is supplied.	PREPARED BY	DATE	Eaton Asheville, NC			
	Dylan Lavalley	8/19/2026	JOB NAME	Linde Phoenix AZ TSMC Phases AP21-1+ 5		
	APPROVED BY	DATE	DESIGNATION	14-ES9486.1C		
	VERSION		TYPE	DRAWING TYPE		
	1.2.3.4		Ampgard MV Motor Control	Customer Appr.		
NEG-ALT Number	REVISION	DWG SIZE	G.O.	ITEM	SHEET	
RH130721X6K2-0005	0	A			3 of 6	

Ampgard Medium Voltage Motor Control Line-up Information

Global Special Modifications

SEL 710-5 071050E1ABA1A7585A381 code # J6KJ

similar to LRH0027608

D26 type relays as shown in schematics

all structures include Gasketing

Str# Structure & Compartment Descriptions & Modifications

1	Incoming Line	Structure Composite Drawing:	No Composite Match	
	Unit 1D	Transition Compartment-Transition Compartment		
		Catalog Number:	BKRTRANSE	
2	Starter	Structure Composite Drawing:	No Composite Match	
	Unit 2B	Starter-400A FLA 188-400, SC9000 Sync Transfer, Output CTs		
		Catalog Number:	SC10B4BE	
		Power Units: kW		
		Entered Power Value: 2240		
		Control Power Transformer: 2 KVA		
		Mechanical Latch: None	Ride Through Circuit: 130ms	
		Space Heater Rating: None		
		Incoming Line Direction:		
		Cable Size:	Incoming Load Direction:	Bottom
			Cable Size:	500 kcmil
		Number of Cables:	Number of Cables:	1
		Ground Size:	Ground Size:	#1 AWG
		Number of Grounds:	Number of Grounds:	2
		3 Single Phase CTs		
		Starter Isolation Switch		
		Current Limiting Power Fuses		
		Main Contactor Roll-In/Roll-Out		
		Low Voltage Control Compartment		
		Set of Control Circuit Terminal Blocks		
		Interposing Relay 3NO 1NC		
		30mm (E34) Start/Stop Pushbutton		
		30mm (E34) Red Run/Close Indicating Light, LED		
		30mm (E34) Green Off/Open Indicating Light, LED		
		GFCT 50/5		
		6 Pole CT Shorting Terminal Block (has GFCT terminals)		
		FT1 Test Switch, 4 PT, 3 CT Shorting, Clear Cover		
		Schweitzer 710-5 Protection Relay for Starter		

The information on this document is created by Eaton. It is disclosed in confidence and it is only to be used for the purpose in which it is supplied.	PREPARED BY		DATE	Eaton Asheville, NC		
	Dylan Lavallee		8/19/2026			
	APPROVED BY		DATE	JOB NAME Linde Phoenix AZ TSMC Phases AP21-1+ 5		
				DESIGNATION 14-ES9486.1C		
	VERSION 1.2.3.4		TYPE Ampgard MV Motor Control		DRAWING TYPE Customer Appr.	
NEG-ALT Number RH130721X6K2-0005	REVISION 0	DWG SIZE A	G.O.		ITEM	SHEET 4 of 6

Ammeter, AC, Panel Mount, 2% for Starter
 Ammeter Switch, Electro Switch 24 series for Starter
 30mm (E34) Test Pushbutton
 30mm (E34) Stop, Emergency Pushbutton
 30mm (E34) Reset Pushbutton
 30mm (E34) White Indicating Light, LED
 30mm (E34) Blue Indicating Light, LED
 Unit 2D AUX Contactor-Contactor With Isolation Switch

Catalog Number: ???????E

3 Starter

Structure Composite Drawing: No Composite Match

Unit 3B Auxiliary Compartment-Blank Auxiliary Compartment (Cannot be converted to a starter in the future)

Catalog Number: AC364CE

Unit 3D AUX Contactor-Contactor With Isolation Switch

Catalog Number: ???????E

4 Drive

Structure Composite Drawing: No Composite Match

Unit 4B Auxiliary Compartment-Blank Auxiliary Compartment (Cannot be converted to a starter in the future)

Catalog Number: AC364C

Unit 4D Main Disconnect-Main Disconnect

Catalog Number: MainDisconnect

5 Drive

Structure Composite Drawing: No Composite Match

Unit 5D Transition Compartment-Transition Compartment

Catalog Number: BKRTRANS

6 Drive

Structure Composite Drawing: No Composite Match

Unit 6D Drive-SC 9000 4160V 60Hz 209A input / 4160V 217 FLA output / 1750HP CT @ 40C

Catalog Number: SC903C175C00

Slot C Voltage Monitor Board
 SoftMag Precharge
 Lightning Arrestors, Dist. Type
 Input Fused Isolation switch with vacuum contactor
 Kirk Key Interlocks
 Low Voltage Control Bucket
 Red-Main Contactor Closed Indicating Light, LED

The information on this document is created by Eaton. It is disclosed in confidence and it is only to be used for the purpose in which it is supplied.

PREPARED BY		DATE	Eaton Asheville, NC		
Dylan Lavallee		8/19/2026			
APPROVED BY		DATE	JOB NAME	Linde Phoenix AZ TSMC Phases AP21-1+ 5	
			DESIGNATION	14-ES9486.1C	
VERSION		TYPE		DRAWING TYPE	
1.2.3.4		Ampgard MV Motor Control		Customer Appr.	
REVISION		DWG SIZE	G.O.	ITEM	SHEET
0		A			5 of 6

Green-Main Contactor Open Indicating Light, LED
Amber-Drive Fault Indicating Light, LED
Internal Control Power- 120V CPT
Internal 480V transformer for blower power

7	Drive	Structure Composite Drawing:	No Composite Match
	Unit 7D	Inverter-Inverter	
		Catalog Number:	Inverter
8	Drive	Structure Composite Drawing:	No Composite Match
	Unit 8D	Output Filter-Output Filter	
		Catalog Number:	OutputFilter

The information on this document is created by Eaton. It is disclosed in confidence and it is only to be used for the purpose in which it is supplied.

	PREPARED BY Dylan Lavallee	DATE 8/19/2026	Eaton Asheville, NC		
	APPROVED BY	DATE	JOB NAME DESIGNATION	Linde Phoenix AZ TSMC Phases AP21-1+ 5 14-ES9486.1C	
	VERSION 1.2.3.4		TYPE Ampgard MV Motor Control	DRAWING TYPE Customer Appr.	
NEG-ALT Number RH130721X6K2-0005	REVISION 0	DWG SIZE A	G.O.	ITEM	SHEET 6 of 6

Ampgard Medium Voltage Motor Control General Information

Specification

Service Voltage:	4160	Enclosure Type:	Ampgard AR-50kA
Labeling:	UL	Altitude:	-3280.8FT to 3280.8FT (-1000M to 1000M)
Fuse Mounting:	Bolt-In	Contactor Electrical Connection:	Bolt-In 400A, Stab-In 800A
Symmetrical kA Rating:	50		

Bus Specification

Main Horizontal Bus:	1200	Bus Density:	Standard
Plating:	Silver Plating, Complete Bus	Insulated:	Yes
Ground Bus 1/4" x 2", 600A:		Ground Bus Plating:	Silver
Left Side Coordination:	MV Switchgear	Left Connection Type:	Bolted
Right Side Coordination:	None	Right Connection Type:	
Breaker Alignment:	No Breaker In Line-up		

Global Specifications

Seismic Rated (6" Clearance):	No	Steel Bottom:	Yes
Channel Sills:	None	Mimic Bus:	No
Back to Back:	No	Aluminum Lead Plates:	No
Exterior Paint:	ANSI-61 Light Gray	Interior Paint:	
Window In All Starter Doors:		Window In All LBS Doors:	No

Miscellaneous Specifications

Nameplate Material:			
Nameplate Color:	Black on White		
Compartment Interior Markers:	Typed Vinyl Tape (White w/Black Letters)		
Back of Door Markers:	None		
Starter Lift Truck:	No	Breaker/Starter Lift Dolly:	No
Breaker Only Dolly:	No	Additional O&M Manuals:	
Witness Testing		Customer Inspection	

Wiring Options

Wire Markers:	Sleeve Type	Wire Terminals:	Locking Fork
Control Wire Gauge:	#14	Controls Wire Color:	Red
CT Wire Gauge:	#12	CT Wire Color:	Color Coded
Ground Wire Color:	Green Yellow stripe	Conduit:	
Spare Contacts Wired Out:			

Space Heater Bus

Cubicle Space Heater Bus:	None	Motor Space Heater Bus:	None
---------------------------	------	-------------------------	------

Two Wire Bus

DC Bus:	Yes	Communications Bus:	
UPS Bus:		Test Power Bus:	No
Control Power Bus:	No	Other Two Wire Bus:	

Other Buses


PT Bus:	Yes	Other Three Wire Bus:	
Other Four Wire Bus:			

Lugs

Main Lugs Type:	None	Line-Up Ground Lugs:	No
Load Lugs Type:	Crimp Type 2 Hole		
Ground Lugs Type:	Crimp Type 2 Hole		

Lead-Time:U


The information on this document is created by Eaton. It is disclosed in confidence and it is only to be used for the purpose in which it is supplied.	PREPARED BY		DATE	Eaton Asheville, NC			
	Dylan Lavallee		8/19/2026				
	APPROVED BY		DATE	JOB NAME	Linde Phoenix AZ TSMC Phases AP21-1+ 5		
				DESIGNATION	16-ES9486.1A		
	VERSION			TYPE	DRAWING TYPE		
	1.2.3.4			Ampgard MV Motor Control		Customer Appr.	
NEG-ALT Number	REVISION	DWG SIZE		G.O.	ITEM	SHEET	
RH130721X6K2-0005	0	A				1 of 6	

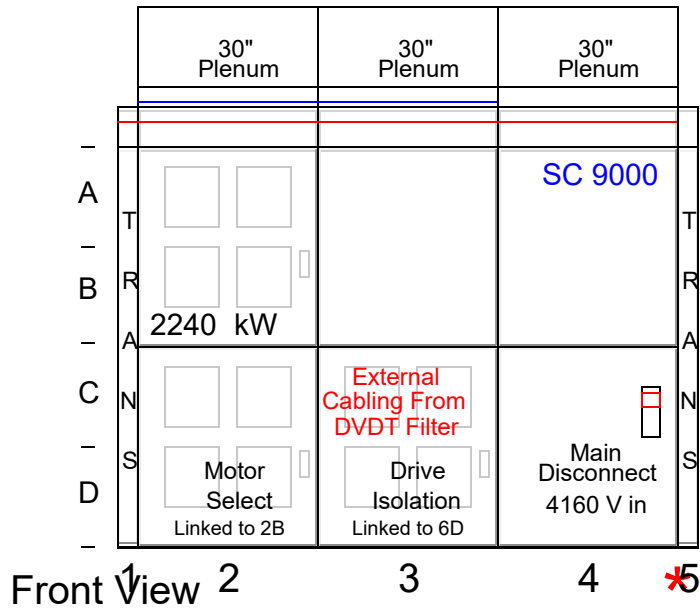

Rear



Floor Plan

Connection
to
MV Switchgear

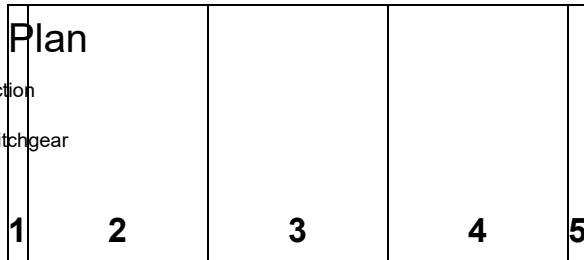

Structure	1	2	3	4	5	
Ship-Inches				112		
Ship-MM				2844		
Width-Inches	4.00	36.00	36.00	36.00	4.00	
Width-MM	101	914	914	914	101	
Depth-Inches	51	51	51	51	51	
Depth-MM	1295	1295	1295	1295	1295	
Height-Inches	100	100	92	92	92	
Height-MM	2540	2540	2336	2336	2336	
Weight-Lbs	462	3000	1000	1950	462	
Weight-Kg	209	1360	453	884	209	

The information on this document is created by Eaton. It is disclosed in confidence and it is only to be used for the purpose in which it is supplied.	PREPARED BY		DATE	Eaton Asheville, NC		
	Dylan Lavallee		8/19/2026			
	APPROVED BY		DATE	JOB NAME Linde Phoenix AZ TSMC Phases AP21-1+ 5		
				DESIGNATION 16-ES9486.1A		
	VERSION 1.2.3.4		TYPE Ampgard MV Motor Control		DRAWING TYPE Customer Appr.	
NEG-ALT Number RH130721X6K2-0005	REVISION 0	DWG SIZE A		G.O.	ITEM	SHEET 2 of 6

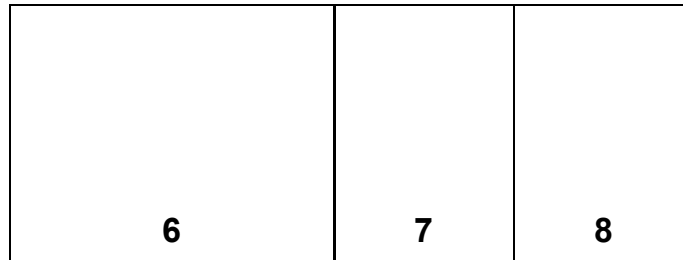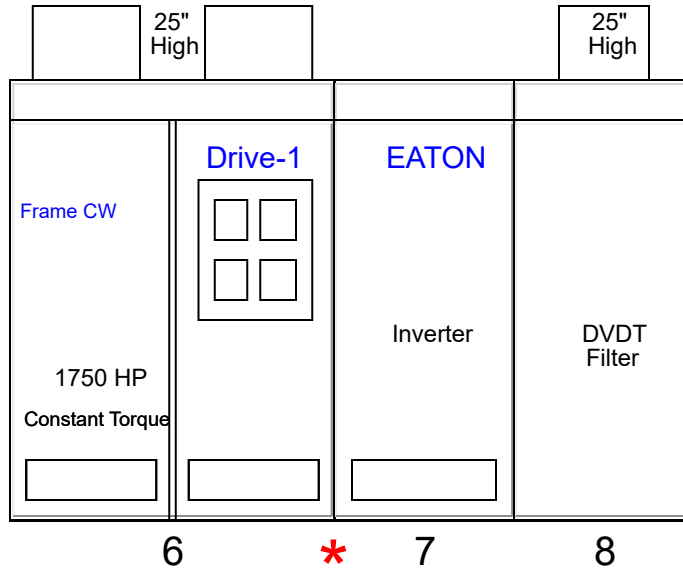

Structure	6	7	8			
Ship-Inches	69		72			
Ship-MM	1752		1828			
Width-Inches	65.00	36.00	36.00			
Width-MM	1651	914	914			
Depth-Inches	51	51	51			
Depth-MM	1295	1295	1295			
Height-Inches	92	92	92			
Height-MM	2336	2336	2336			
Weight-Lbs	7985	2540	600			
Weight-Kg	3621	1152	272			

The information on this document is created by Eaton. It is disclosed in confidence and it is only to be used for the purpose in which it is supplied.	PREPARED BY	DATE	Eaton Asheville, NC			
	Dylan Lavalley	8/19/2026	JOB NAME	Linde Phoenix AZ TSMC Phases AP21-1+ 5		
	APPROVED BY	DATE	DESIGNATION	16-ES9486.1A		
	VERSION		TYPE	DRAWING TYPE		
	1.2.3.4		Ampgard MV Motor Control	Customer Appr.		
NEG-ALT Number	REVISION	DWG SIZE	G.O.	ITEM	SHEET	
RH130721X6K2-0005	0	A			3 of 6	

Ampgard Medium Voltage Motor Control Line-up Information

Global Special Modifications

SEL 710-5 071050E1ABA1A7585A381 code # J6KJ

similar to LRH0027608

D26 type relays as shown in schematics

all structures include Gasketing

Str# Structure & Compartment Descriptions & Modifications

1	Incoming Line	Structure Composite Drawing:	No Composite Match	
	Unit 1D	Transition Compartment-Transition Compartment		
		Catalog Number:	BKRTRANSE	
2	Starter	Structure Composite Drawing:	No Composite Match	
	Unit 2B	Starter-400A FLA 188-400, SC9000 Sync Transfer, Output CTs		
		Catalog Number:	SC10B4BE	
		Power Units: kW		
		Entered Power Value: 2240		
		Control Power Transformer: 2 KVA		
		Mechanical Latch: None	Ride Through Circuit: 130ms	
		Space Heater Rating: None		
		Incoming Line Direction:		
		Cable Size:	Incoming Load Direction:	Bottom
			Cable Size:	500 kcmil
		Number of Cables:	Number of Cables:	1
		Ground Size:	Ground Size:	#1 AWG
		Number of Grounds:	Number of Grounds:	2
		3 Single Phase CTs		
		Starter Isolation Switch		
		Current Limiting Power Fuses		
		Main Contactor Roll-In/Roll-Out		
		Low Voltage Control Compartment		
		Set of Control Circuit Terminal Blocks		
		Interposing Relay 3NO 1NC		
		30mm (E34) Start/Stop Pushbutton		
		30mm (E34) Red Run/Close Indicating Light, LED		
		30mm (E34) Green Off/Open Indicating Light, LED		
		GFCT 50/5		
		6 Pole CT Shorting Terminal Block (has GFCT terminals)		
		FT1 Test Switch, 4 PT, 3 CT Shorting, Clear Cover		
		Schweitzer 710-5 Protection Relay for Starter		

The information on this document is created by Eaton. It is disclosed in confidence and it is only to be used for the purpose in which it is supplied.	PREPARED BY		DATE	EatonAsheville, NC		
	Dylan Lavallee		8/19/2026			
	APPROVED BY		DATE	JOB NAME		
				Linde Phoenix AZ TSMC Phases AP21-1+ 5		
				DESIGNATION		
				16-ES9486.1A		
	VERSION			TYPE		DRAWING TYPE
	1.2.3.4			Ampgard MV Motor Control		Customer Appr.
NEG-ALT Number	REVISION		DWG SIZE	G.O.	ITEM	SHEET
RH130721X6K2-0005	0		A			4 of 6

Ammeter, AC, Panel Mount, 2% for Starter
Ammeter Switch, Electro Switch 24 series for Starter
30mm (E34) Test Pushbutton
30mm (E34) Stop, Emergency Pushbutton
30mm (E34) Reset Pushbutton
30mm (E34) White Indicating Light, LED
30mm (E34) Blue Indicating Light, LED
Unit 2D AUX Contactor-Contactor With Isolation Switch

Catalog Number: ???????E

3 Starter

Structure Composite Drawing: No Composite Match

Unit 3B Auxiliary Compartment-Blank Auxiliary Compartment (Cannot be converted to a starter in the future)

Catalog Number: AC364CE

Unit 3D AUX Contactor-Contactor With Isolation Switch

Catalog Number: ???????E

4 Drive

Structure Composite Drawing: No Composite Match

Unit 4B Auxiliary Compartment-Blank Auxiliary Compartment (Cannot be converted to a starter in the future)

Catalog Number: AC364C

Unit 4D Main Disconnect-Main Disconnect

Catalog Number: MainDisconnect

5 Drive

Structure Composite Drawing: No Composite Match

Unit 5D Transition Compartment-Transition Compartment

Catalog Number: BKRTRANS

6 Drive

Structure Composite Drawing: No Composite Match

Unit 6D Drive-SC 9000 4160V 60Hz 209A input / 4160V 217 FLA output / 1750HP CT @ 40C

Catalog Number: SC903C175C00

Slot C Voltage Monitor Board
SoftMag Precharge
Lightning Arrestors, Dist. Type
Input Fused Isolation switch with vacuum contactor
Kirk Key Interlocks
Low Voltage Control Bucket
Red-Main Contactor Closed Indicating Light, LED

The information on this document is created by Eaton. It is disclosed in confidence and it is only to be used for the purpose in which it is supplied.

PREPARED BY		DATE	Eaton Asheville, NC		
Dylan Lavallee		8/19/2026			
APPROVED BY		DATE	JOB NAME	Linde Phoenix AZ TSMC Phases AP21-1+ 5	
			DESIGNATION	16-ES9486.1A	
VERSION		TYPE		DRAWING TYPE	
1.2.3.4		Ampgard MV Motor Control		Customer Appr.	
REVISION		DWG SIZE	G.O.	ITEM	SHEET
0		A			5 of 6

Green-Main Contactor Open Indicating Light, LED
Amber-Drive Fault Indicating Light, LED
Internal Control Power- 120V CPT
Internal 480V transformer for blower power

7	Drive	Structure Composite Drawing:	No Composite Match
	Unit 7D	Inverter-Inverter	
		Catalog Number:	Inverter
8	Drive	Structure Composite Drawing:	No Composite Match
	Unit 8D	Output Filter-Output Filter	
		Catalog Number:	OutputFilter

The information on this document is created by Eaton. It is disclosed in confidence and it is only to be used for the purpose in which it is supplied.	PREPARED BY Dylan Lavallee	DATE 8/19/2026	Eaton Asheville, NC		
	APPROVED BY	DATE	JOB NAME DESIGNATION	Linde Phoenix AZ TSMC Phases AP21-1+ 5 16-ES9486.1A	
	VERSION 1.2.3.4		TYPE Ampgard MV Motor Control	DRAWING TYPE Customer Appr.	
NEG-ALT Number RH130721X6K2-0005	REVISION 0	DWG SIZE A	G.O.	ITEM	SHEET 6 of 6

Ampgard Medium Voltage Motor Control General Information

Specification

Service Voltage:	4160	Enclosure Type:	Ampgard AR-50kA
Labeling:	UL	Altitude:	-3280.8FT to 3280.8FT (-1000M to 1000M)
Fuse Mounting:	Bolt-In	Contactor Electrical Connection:	Bolt-In 400A, Stab-In 800A
Symmetrical kA Rating:	50		

Bus Specification

Main Horizontal Bus:	1200	Bus Density:	Standard
Plating:	Silver Plating, Complete Bus	Insulated:	Yes
Ground Bus 1/4" x 2", 600A:		Ground Bus Plating:	Silver
Left Side Coordination:	MV Switchgear	Left Connection Type:	Bolted
Right Side Coordination:	None	Right Connection Type:	
Breaker Alignment:	No Breaker In Line-up		

Global Specifications

Seismic Rated (6" Clearance):	No	Steel Bottom:	Yes
Channel Sills:	None	Mimic Bus:	No
Back to Back:	No	Aluminum Lead Plates:	No
Exterior Paint:	ANSI-61 Light Gray	Interior Paint:	
Window In All Starter Doors:		Window In All LBS Doors:	No

Miscellaneous Specifications

Nameplate Material:			
Nameplate Color:	Black on White		
Compartment Interior Markers:	Typed Vinyl Tape (White w/Black Letters)		
Back of Door Markers:	None		
Starter Lift Truck:	No	Breaker/Starter Lift Dolly:	No
Breaker Only Dolly:	No	Additional O&M Manuals:	
Witness Testing		Customer Inspection	

Wiring Options

Wire Markers:	Sleeve Type	Wire Terminals:	Locking Fork
Control Wire Gauge:	#14	Controls Wire Color:	Red
CT Wire Gauge:	#12	CT Wire Color:	Color Coded
Ground Wire Color:	Green Yellow stripe	Conduit:	
Spare Contacts Wired Out:			

Space Heater Bus

Cubicle Space Heater Bus:	None	Motor Space Heater Bus:	None
---------------------------	------	-------------------------	------

Two Wire Bus

DC Bus:	Yes	Communications Bus:	
UPS Bus:		Test Power Bus:	No
Control Power Bus:	No	Other Two Wire Bus:	

Other Buses


PT Bus:	Yes	Other Three Wire Bus:	
Other Four Wire Bus:			

Lugs

Main Lugs Type:	None	Line-Up Ground Lugs:	No
Load Lugs Type:	Crimp Type 2 Hole		
Ground Lugs Type:	Crimp Type 2 Hole		

Lead-Time:U


The information on this document is created by Eaton. It is disclosed in confidence and it is only to be used for the purpose in which it is supplied.	PREPARED BY		DATE	EatonAsheville, NC		
	Dylan Lavallee		8/19/2026			
	APPROVED BY		DATE	JOB NAME		
				Linde Phoenix AZ TSMC Phases AP21-1+ 5		
				DESIGNATION		
				16-ES9486.1B		
	VERSION		TYPE		DRAWING TYPE	
	1.2.3.4		Ampgard MV Motor Control		Customer Appr.	
NEG-ALT Number	REVISION	DWG SIZE	G.O.	ITEM	SHEET	
RH130721X6K2-0005	0	A			1 of 6	

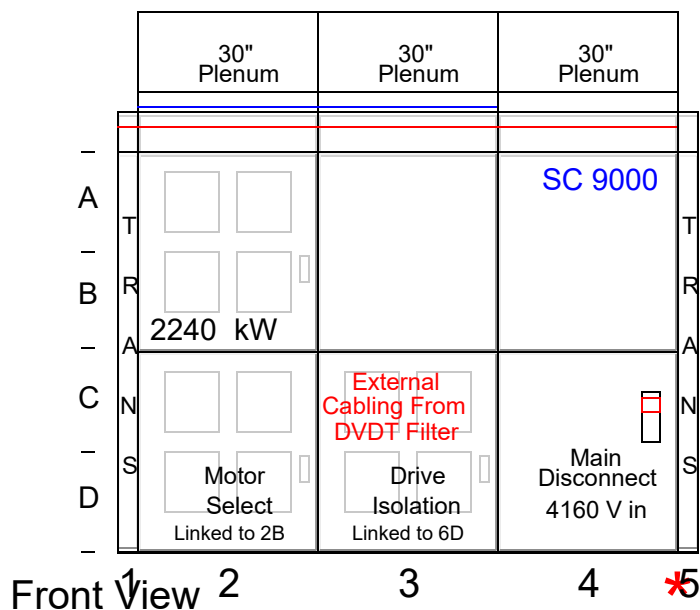

Rear



Floor Plan

Connection
to
MV Switchgear

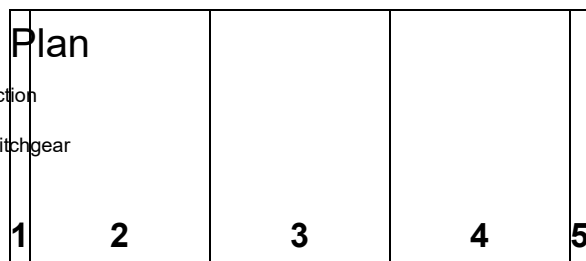

Structure	1	2	3	4	5	
Ship-Inches				112		
Ship-MM				2844		
Width-Inches	4.00	36.00	36.00	36.00	4.00	
Width-MM	101	914	914	914	101	
Depth-Inches	51	51	51	51	51	
Depth-MM	1295	1295	1295	1295	1295	
Height-Inches	100	100	92	92	92	
Height-MM	2540	2540	2336	2336	2336	
Weight-Lbs	462	3000	1000	1950	462	
Weight-Kg	209	1360	453	884	209	

The information on this document is created by Eaton. It is disclosed in confidence and it is only to be used for the purpose in which it is supplied.	PREPARED BY Dylan Lavalley	DATE 8/19/2026	Eaton Asheville, NC			
	APPROVED BY	DATE	JOB NAME Linde Phoenix AZ TSMC Phases AP21-1+ 5	DESIGNATION 16-ES9486.1B		
	VERSION 1.2.3.4		TYPE Ampgard MV Motor Control		DRAWING TYPE Customer Appr.	
NEG-ALT Number RH130721X6K2-0005	REVISION 0	DWG SIZE A	G.O.	ITEM	SHEET 2 of 6	

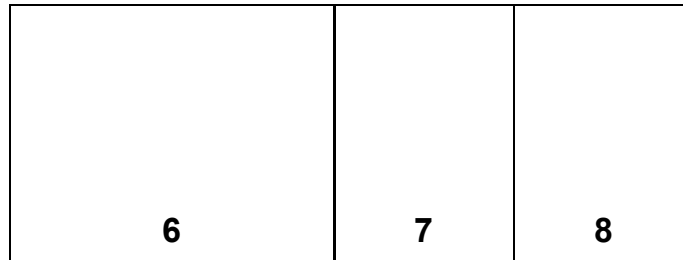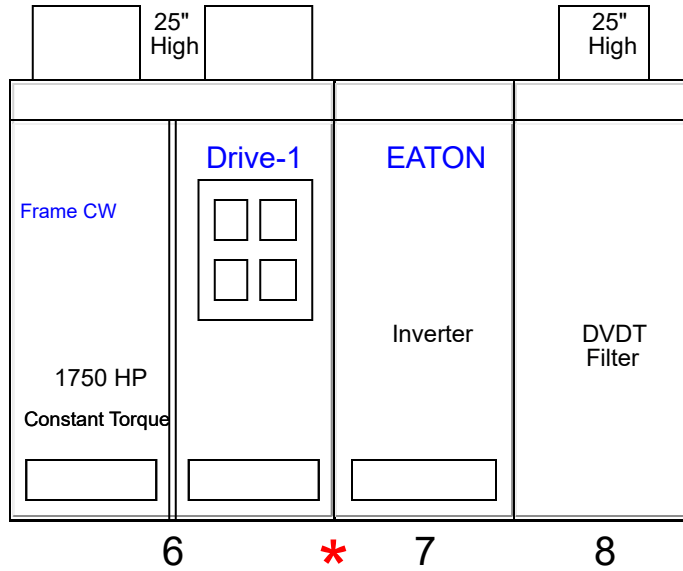

Structure	6	7	8			
Ship-Inches	69		72			
Ship-MM	1752		1828			
Width-Inches	65.00	36.00	36.00			
Width-MM	1651	914	914			
Depth-Inches	51	51	51			
Depth-MM	1295	1295	1295			
Height-Inches	92	92	92			
Height-MM	2336	2336	2336			
Weight-Lbs	7985	2540	600			
Weight-Kg	3621	1152	272			

The information on this document is created by Eaton. It is disclosed in confidence and it is only to be used for the purpose in which it is supplied.	PREPARED BY	DATE	Eaton Asheville, NC			
	Dylan Lavalley	8/19/2026	JOB NAME	Linde Phoenix AZ TSMC Phases AP21-1+ 5		
	APPROVED BY	DATE	DESIGNATION	16-ES9486.1B		
	VERSION		TYPE	DRAWING TYPE		
	1.2.3.4		Ampgard MV Motor Control	Customer Appr.		
NEG-ALT Number	REVISION	DWG SIZE	G.O.	ITEM	SHEET	
RH130721X6K2-0005	0	A			3 of 6	

Ampgard Medium Voltage Motor Control Line-up Information

Global Special Modifications

SEL 710-5 071050E1ABA1A7585A381 code # J6KJ

similar to LRH0027608

D26 type relays as shown in schematics

all structures include Gasketing

Str# Structure & Compartment Descriptions & Modifications

1	Incoming Line	Structure Composite Drawing:	No Composite Match	
	Unit 1D	Transition Compartment-Transition Compartment		
		Catalog Number:	BKRTRANSE	
2	Starter	Structure Composite Drawing:	No Composite Match	
	Unit 2B	Starter-400A FLA 188-400, SC9000 Sync Transfer, Output CTs		
		Catalog Number:	SC10B4BE	
		Power Units:	kW	
		Entered Power Value:	2240	
		Control Power Transformer:	2 KVA	
		Mechanical Latch:	None	Ride Through Circuit: 130ms
		Space Heater Rating:	None	
		Incoming Line Direction:		
		Cable Size:	Incoming Load Direction:	Bottom
			Cable Size:	500
				kcmil
		Number of Cables:	Number of Cables:	1
		Ground Size:	Ground Size:	#1
				AWG
				G
		Number of Grounds:	Number of Grounds:	2
		3 Single Phase CTs		
		Starter Isolation Switch		
		Current Limiting Power Fuses		
		Main Contactor Roll-In/Roll-Out		
		Low Voltage Control Compartment		
		Set of Control Circuit Terminal Blocks		
		Interposing Relay 3NO 1NC		
		30mm (E34) Start/Stop Pushbutton		
		30mm (E34) Red Run/Close Indicating Light, LED		
		30mm (E34) Green Off/Open Indicating Light, LED		
		GFCT 50/5		
		6 Pole CT Shorting Terminal Block (has GFCT terminals)		
		FT1 Test Switch, 4 PT, 3 CT Shorting, Clear Cover		
		Schweitzer 710-5 Protection Relay for Starter		

The information on this document is created by Eaton. It is disclosed in confidence and it is only to be used for the purpose in which it is supplied.

PREPARED BY		DATE	Eaton Asheville, NC		
Dylan Lavallee		8/19/2026			
APPROVED BY		DATE	JOB NAME	Linde Phoenix AZ TSMC Phases AP21-1+ 5	
			DESIGNATION	16-ES9486.1B	
VERSION		TYPE		DRAWING TYPE	
1.2.3.4		Ampgard MV Motor Control		Customer Appr.	
REVISION	DWG SIZE	G.O.	ITEM	SHEET	
0	A			4 of 6	

Ammeter, AC, Panel Mount, 2% for Starter
Ammeter Switch, Electro Switch 24 series for Starter
30mm (E34) Test Pushbutton
30mm (E34) Stop, Emergency Pushbutton
30mm (E34) Reset Pushbutton
30mm (E34) White Indicating Light, LED
30mm (E34) Blue Indicating Light, LED
Unit 2D AUX Contactor-Contactor With Isolation Switch

Catalog Number: ???????E

3 Starter

Structure Composite Drawing: No Composite Match

Unit 3B Auxiliary Compartment-Blank Auxiliary Compartment (Cannot be converted to a starter in the future)

Catalog Number: AC364CE

Unit 3D AUX Contactor-Contactor With Isolation Switch

Catalog Number: ???????E

4 Drive

Structure Composite Drawing: No Composite Match

Unit 4B Auxiliary Compartment-Blank Auxiliary Compartment (Cannot be converted to a starter in the future)

Catalog Number: AC364C

Unit 4D Main Disconnect-Main Disconnect

Catalog Number: MainDisconnect

5 Drive

Structure Composite Drawing: No Composite Match

Unit 5D Transition Compartment-Transition Compartment

Catalog Number: BKRTRANS

6 Drive

Structure Composite Drawing: No Composite Match

Unit 6D Drive-SC 9000 4160V 60Hz 209A input / 4160V 217 FLA output / 1750HP CT @ 40C

Catalog Number: SC903C175C00

Slot C Voltage Monitor Board
SoftMag Precharge
Lightning Arrestors, Dist. Type
Input Fused Isolation switch with vacuum contactor
Kirk Key Interlocks
Low Voltage Control Bucket
Red-Main Contactor Closed Indicating Light, LED

The information on this document is created by Eaton. It is disclosed in confidence and it is only to be used for the purpose in which it is supplied.

PREPARED BY		DATE	Eaton Asheville, NC		
Dylan Lavallee		8/19/2026			
APPROVED BY		DATE	JOB NAME	Linde Phoenix AZ TSMC Phases AP21-1+ 5	
			DESIGNATION	16-ES9486.1B	
VERSION		TYPE		DRAWING TYPE	
1.2.3.4		Ampgard MV Motor Control		Customer Appr.	
REVISION		DWG SIZE	G.O.	ITEM	SHEET
0		A			5 of 6

Green-Main Contactor Open Indicating Light, LED
Amber-Drive Fault Indicating Light, LED
Internal Control Power- 120V CPT
Internal 480V transformer for blower power

7	Drive	Structure Composite Drawing:	No Composite Match
	Unit 7D	Inverter-Inverter	
		Catalog Number:	Inverter
8	Drive	Structure Composite Drawing:	No Composite Match
	Unit 8D	Output Filter-Output Filter	
		Catalog Number:	OutputFilter

The information on this document is created by Eaton. It is disclosed in confidence and it is only to be used for the purpose in which it is supplied.

The information on this document is created by Eaton. It is disclosed in confidence and it is only to be used for the purpose in which it is supplied.	PREPARED BY Dylan Lavallee		DATE 8/19/2026	Eaton Asheville, NC		
	APPROVED BY		DATE	JOB NAME Linde Phoenix AZ TSMC Phases AP21-1+ 5		
	VERSION 1.2.3.4		DESIGNATION 16-ES9486.1B			
			TYPE Ampgard MV Motor Control		DRAWING TYPE Customer Appr.	
NEG-ALT Number RH130721X6K2-0005	REVISION 0	DWG SIZE A	G.O.		ITEM	SHEET 6 of 6

Ampgard Medium Voltage Motor Control General Information

Specification

Service Voltage:	4160	Enclosure Type:	Ampgard AR-50kA
Labeling:	UL	Altitude:	-3280.8FT to 3280.8FT (-1000M to 1000M)
Fuse Mounting:	Bolt-In	Contactor Electrical Connection:	Bolt-In 400A, Stab-In 800A
Symmetrical kA Rating:	50		

Bus Specification

Main Horizontal Bus:	1200	Bus Density:	Standard
Plating:	Silver Plating, Complete Bus	Insulated:	Yes
Ground Bus 1/4" x 2", 600A:		Ground Bus Plating:	Silver
Left Side Coordination:	MV Switchgear	Left Connection Type:	Bolted
Right Side Coordination:	None	Right Connection Type:	
Breaker Alignment:	No Breaker In Line-up		

Global Specifications

Seismic Rated (6" Clearance):	No	Steel Bottom:	Yes
Channel Sills:	None	Mimic Bus:	No
Back to Back:	No	Aluminum Lead Plates:	No
Exterior Paint:	ANSI-61 Light Gray	Interior Paint:	
Window In All Starter Doors:		Window In All LBS Doors:	No

Miscellaneous Specifications

Nameplate Material:			
Nameplate Color:	Black on White		
Compartment Interior Markers:	Typed Vinyl Tape (White w/Black Letters)		
Back of Door Markers:	None		
Starter Lift Truck:	No	Breaker/Starter Lift Dolly:	No
Breaker Only Dolly:	No	Additional O&M Manuals:	
Witness Testing		Customer Inspection	

Wiring Options

Wire Markers:	Sleeve Type	Wire Terminals:	Locking Fork
Control Wire Gauge:	#14	Controls Wire Color:	Red
CT Wire Gauge:	#12	CT Wire Color:	Color Coded
Ground Wire Color:	Green Yellow stripe	Conduit:	
Spare Contacts Wired Out:			

Space Heater Bus

Cubicle Space Heater Bus:	None	Motor Space Heater Bus:	None
---------------------------	------	-------------------------	------

Two Wire Bus

DC Bus:	Yes	Communications Bus:	
UPS Bus:		Test Power Bus:	No
Control Power Bus:	No	Other Two Wire Bus:	

Other Buses


PT Bus:	Yes	Other Three Wire Bus:	
Other Four Wire Bus:			

Lugs

Main Lugs Type:	None	Line-Up Ground Lugs:	No
Load Lugs Type:	Crimp Type 2 Hole		
Ground Lugs Type:	Crimp Type 2 Hole		

Lead-Time:U


The information on this document is created by Eaton. It is disclosed in confidence and it is only to be used for the purpose in which it is supplied.	PREPARED BY		DATE	Eaton Asheville, NC		
	Dylan Lavallee		8/19/2026			
	APPROVED BY		DATE	JOB NAME Linde Phoenix AZ TSMC Phases AP21-1+ 5		
				DESIGNATION 16-ES9486.1C		
	VERSION 1.2.3.4		TYPE Ampgard MV Motor Control		DRAWING TYPE Customer Appr.	
NEG-ALT Number RH130721X6K2-0005	REVISION 0	DWG SIZE A	G.O.		ITEM	SHEET 1 of 6

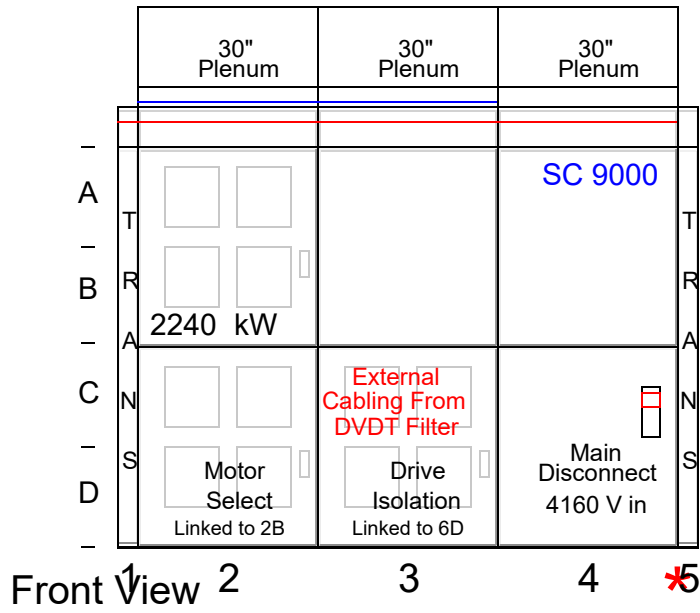

Rear



Floor Plan

Connection
to
MV Switchgear

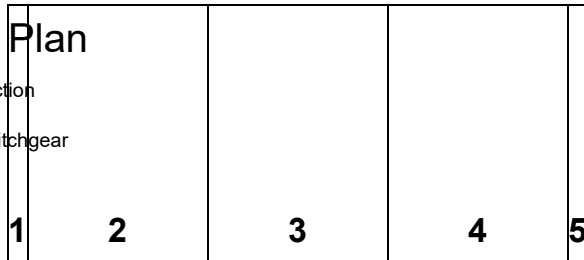

Structure	1	2	3	4	5	
Ship-Inches				112		
Ship-MM				2844		
Width-Inches	4.00	36.00	36.00	36.00	4.00	
Width-MM	101	914	914	914	101	
Depth-Inches	51	51	51	51	51	
Depth-MM	1295	1295	1295	1295	1295	
Height-Inches	100	100	92	92	92	
Height-MM	2540	2540	2336	2336	2336	
Weight-Lbs	462	3000	1000	1950	462	
Weight-Kg	209	1360	453	884	209	

The information on this document is created by Eaton. It is disclosed in confidence and it is only to be used for the purpose in which it is supplied.	PREPARED BY		DATE	Eaton				Asheville, NC		
	Dylan Lavalley		8/19/2026							
	APPROVED BY		DATE	JOB NAME		Linde Phoenix AZ TSMC Phases AP21-1+ 5				
				DESIGNATION		16-ES9486.1C				
	VERSION			TYPE		DRAWING TYPE				
	1.2.3.4			Ampgard MV Motor Control		Customer Appr.				
NEG-ALT Number	REVISION		DWG SIZE		G.O.		ITEM		SHEET	
RH130721X6K2-0005	0		A						2 of 6	

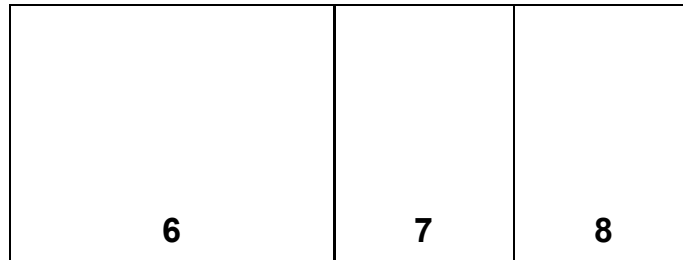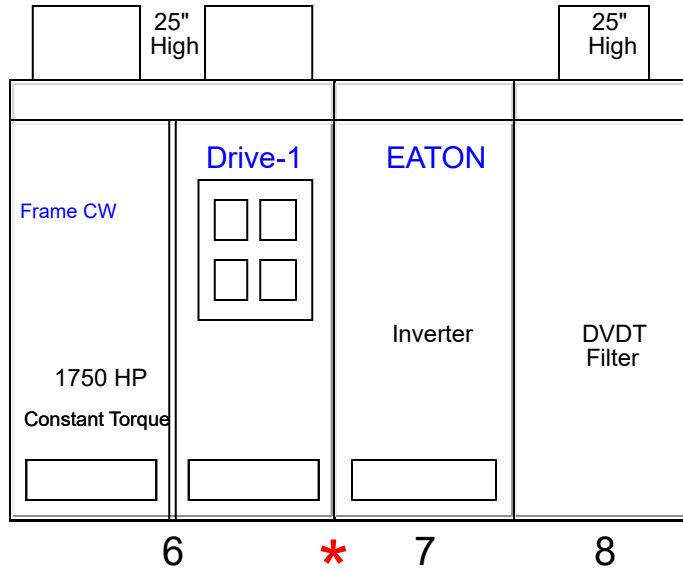

Structure	6	7	8			
Ship-Inches	69		72			
Ship-MM	1752		1828			
Width-Inches	65.00	36.00	36.00			
Width-MM	1651	914	914			
Depth-Inches	51	51	51			
Depth-MM	1295	1295	1295			
Height-Inches	92	92	92			
Height-MM	2336	2336	2336			
Weight-Lbs	7985	2540	600			
Weight-Kg	3621	1152	272			

The information on this document is created by Eaton. It is disclosed in confidence and it is only to be used for the purpose in which it is supplied.	PREPARED BY Dylan Lavallee	DATE 8/19/2026	Eaton Asheville, NC			
	APPROVED BY	DATE	JOB NAME Linde Phoenix AZ TSMC Phases AP21-1+ 5	DESIGNATION 16-ES9486.1C		
	VERSION 1.2.3.4		TYPE Ampgard MV Motor Control		DRAWING TYPE Customer Appr.	
NEG-ALT Number RH130721X6K2-0005	REVISION 0	DWG SIZE A	G.O.	ITEM	SHEET 3 of 6	

Ampgard Medium Voltage Motor Control Line-up Information

Global Special Modifications

SEL 710-5 071050E1ABA1A7585A381 code # J6KJ

similar to LRH0027608

D26 type relays as shown in schematics

all structures include Gasketing

Str# Structure & Compartment Descriptions & Modifications

1	Incoming Line	Structure Composite Drawing:	No Composite Match	
	Unit 1D	Transition Compartment-Transition Compartment		
		Catalog Number:	BKRTRANSE	
2	Starter	Structure Composite Drawing:	No Composite Match	
	Unit 2B	Starter-400A FLA 188-400, SC9000 Sync Transfer, Output CTs		
		Catalog Number:	SC10B4BE	
		Power Units:	kW	
		Entered Power Value:	2240	
		Control Power Transformer:	2 KVA	
		Mechanical Latch:	None	Ride Through Circuit: 130ms
		Space Heater Rating:	None	
		Incoming Line Direction:		
		Cable Size:	Incoming Load Direction:	Bottom
			Cable Size:	500 kcmil
		Number of Cables:	Number of Cables:	1
		Ground Size:	Ground Size:	#1 AWG
		Number of Grounds:	Number of Grounds:	2
		3 Single Phase CTs		
		Starter Isolation Switch		
		Current Limiting Power Fuses		
		Main Contactor Roll-In/Roll-Out		
		Low Voltage Control Compartment		
		Set of Control Circuit Terminal Blocks		
		Interposing Relay 3NO 1NC		
		30mm (E34) Start/Stop Pushbutton		
		30mm (E34) Red Run/Close Indicating Light, LED		
		30mm (E34) Green Off/Open Indicating Light, LED		
		GFCT 50/5		
		6 Pole CT Shorting Terminal Block (has GFCT terminals)		
		FT1 Test Switch, 4 PT, 3 CT Shorting, Clear Cover		
		Schweitzer 710-5 Protection Relay for Starter		

The information on this document is created by Eaton. It is disclosed in confidence and it is only to be used for the purpose in which it is supplied.	PREPARED BY		DATE	Eaton Asheville, NC		
	Dylan Lavallee		8/19/2026			
	APPROVED BY		DATE	JOB NAME Linde Phoenix AZ TSMC Phases AP21-1+ 5		
				DESIGNATION 16-ES9486.1C		
	VERSION 1.2.3.4		TYPE Ampgard MV Motor Control		DRAWING TYPE Customer Appr.	
NEG-ALT Number RH130721X6K2-0005	REVISION 0	DWG SIZE A	G.O.		ITEM	SHEET 4 of 6

Ammeter, AC, Panel Mount, 2% for Starter
Ammeter Switch, Electro Switch 24 series for Starter
30mm (E34) Test Pushbutton
30mm (E34) Stop, Emergency Pushbutton
30mm (E34) Reset Pushbutton
30mm (E34) White Indicating Light, LED
30mm (E34) Blue Indicating Light, LED
Unit 2D AUX Contactor-Contactor With Isolation Switch

Catalog Number: ???????E

3 Starter

Structure Composite Drawing: No Composite Match

Unit 3B Auxiliary Compartment-Blank Auxiliary Compartment (Cannot be converted to a starter in the future)

Catalog Number: AC364CE

Unit 3D AUX Contactor-Contactor With Isolation Switch

Catalog Number: ???????E

4 Drive

Structure Composite Drawing: No Composite Match

Unit 4B Auxiliary Compartment-Blank Auxiliary Compartment (Cannot be converted to a starter in the future)

Catalog Number: AC364C

Unit 4D Main Disconnect-Main Disconnect

Catalog Number: MainDisconnect

5 Drive

Structure Composite Drawing: No Composite Match

Unit 5D Transition Compartment-Transition Compartment

Catalog Number: BKRTRANS

6 Drive

Structure Composite Drawing: No Composite Match

Unit 6D Drive-SC 9000 4160V 60Hz 209A input / 4160V 217 FLA output / 1750HP CT @ 40C

Catalog Number: SC903C175C00

Slot C Voltage Monitor Board
SoftMag Precharge
Lightning Arrestors, Dist. Type
Input Fused Isolation switch with vacuum contactor
Kirk Key Interlocks
Low Voltage Control Bucket
Red-Main Contactor Closed Indicating Light, LED

The information on this document is created by Eaton. It is disclosed in confidence and it is only to be used for the purpose in which it is supplied.

PREPARED BY		DATE	Eaton Asheville, NC		
Dylan Lavallee		8/19/2026			
APPROVED BY		DATE	JOB NAME	Linde Phoenix AZ TSMC Phases AP21-1+ 5	
			DESIGNATION	16-ES9486.1C	
VERSION		TYPE		DRAWING TYPE	
1.2.3.4		Ampgard MV Motor Control		Customer Appr.	
REVISION		DWG SIZE	G.O.	ITEM	SHEET
0		A			5 of 6

Green-Main Contactor Open Indicating Light, LED
Amber-Drive Fault Indicating Light, LED
Internal Control Power- 120V CPT
Internal 480V transformer for blower power

7	Drive	Structure Composite Drawing:	No Composite Match
	Unit 7D	Inverter-Inverter	
		Catalog Number:	Inverter
8	Drive	Structure Composite Drawing:	No Composite Match
	Unit 8D	Output Filter-Output Filter	
		Catalog Number:	OutputFilter

The information on this document is created by Eaton. It is disclosed in confidence and it is only to be used for the purpose in which it is supplied.	PREPARED BY Dylan Lavallee	DATE 8/19/2026	Eaton Asheville, NC		
	APPROVED BY	DATE	JOB NAME DESIGNATION	Linde Phoenix AZ TSMC Phases AP21-1+ 5 16-ES9486.1C	
	VERSION 1.2.3.4		TYPE Ampgard MV Motor Control	DRAWING TYPE Customer Appr.	
NEG-ALT Number RH130721X6K2-0005	REVISION 0	DWG SIZE A	G.O.	ITEM	SHEET 6 of 6

Low Voltage Assemblies General Information

Magnum PXR Specifications

Service Voltage: 480/277 wye, 3 Wires, 60 Hertz,
Neutral None
Short Circuit Rating:: 85
Certification: UL1558, Arc Resistant Switchgear

Bus Specifications

Amps:: 4000 Bus Rating: 100 kA
Insulation:: None Bus Plating:: Tin
Density:: Standard
Temperature Rise:: 65 Degree C Rise over 40 Degrees
High Altitude Derating:: None
Ground Bus:: 0.25x2" (Std)
Ground Bus Lugs (1 each end):: Std Gnd Lug (Mechanical Locking)

Incoming Information

Left Substation: None
Right Substation: None
Incoming Cables in Structure(s):: None
Incoming Busway in Structure(s):: None

Structure Specifications

Enclosure Type:: EEMAC/Nema 1A
Cable Compartment Closure: Bolted Hinged Covers, Captive Screws
Conduit Entry:: Bottom Entry

Special Mods

Qty	Description
1	SEL-751 ON TIE
5	FT TEST SWITCH

Enclosure Properties

Struct #	Width	Depth	Description/Modifications	Max 4 in. Conduits Top or Bottom *
1	44	72	Breakers - 44in Structure, 4000 Amps	12
2	30	72	Breakers - 30in Structure, 4000 Amps	8
3	44	72	Breakers - 44in Structure, 4000 Amps	12
4	30	72	Breakers - 30in Structure, 4000 Amps	8
5	44	72	Breakers - 44in Structure, 4000 Amps	12

Total of 5 Structures, Total Width of 192 in [4877 mm]

Overall Depth 72, Overall Weight 13580 lbs [6160 kg]

* Recommended number of 4 inch power conduits available in this structure (top or bottom entry).

** Please contact the factory for recommended number of 4 inch power conduits available in this structure.

Items in this structure's Bill of Material would not allow an automated calculation.

Transfer Control Requirements: "Eaton PLC w/ Remote Touchscreen" selected on Automatic Transfer Tab in Bidman Takeoff

Calculated Heat Loss: 15015 W

NOTE: This is a worst case calculation. The loss is calculated under the assumptions that vertical bus will be rated the same as the main bus and that all breakers will be supplying current at 100% of their frame rating.

DIMENSIONS ARE NOT FOR CONSTRUCTION.

The information on this document is created by Eaton Corporation. It is disclosed in confidence and it is only to be used for the purpose in which it is supplied.	PREPARED BY		DATE	EatonAsheville, NC		
	Jacob Simonsen		8/19/2026			
	APPROVED BY		DATE	JOB NAME		
				DESIGNATION		
	VERSION		TYPE		DRAWING TYPE	
	11.25.47.0		Low Voltage Assemblies		Customer Appr.	
NEG-ALT Number	REVISION	DWG SIZE		G.O.	ITEM	SHEET
RH130721X6K2-0005	0	A				1 of 4

A / E

B / F

C / G

D / H

Front View

Main Metering SEL-751	Instrument	Instrument	Transfer Scheme LVA MTM	Instrument	Instrument	Main Metering SEL-751	Instrument
Main MPS-840 4000A-DE PXR25LSIG		Feeder MPS-832 3200A-DE PXR25LSIG		Tie MPS-840 4000A-DE PXR25LSIG		Feeder MPS-832 3200A-DE PXR25LSIG	Main MPS-840 4000A-DE PXR25LSIG
Eaton SPD 250KA	Blank	Blank	Blank	Blank	Blank	Eaton SPD 250KA	Blank

1

2

*


3

4

*


5

Power Flow

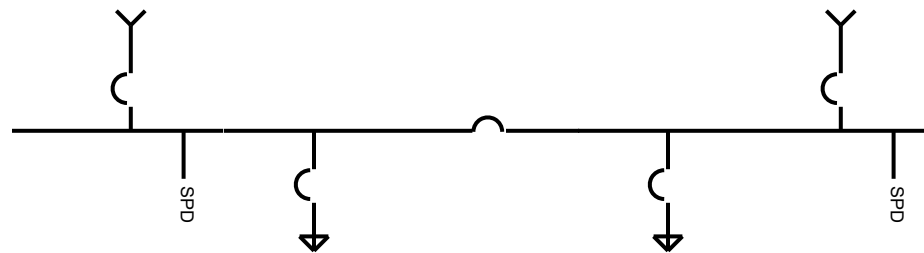

Rear

Floor Plan

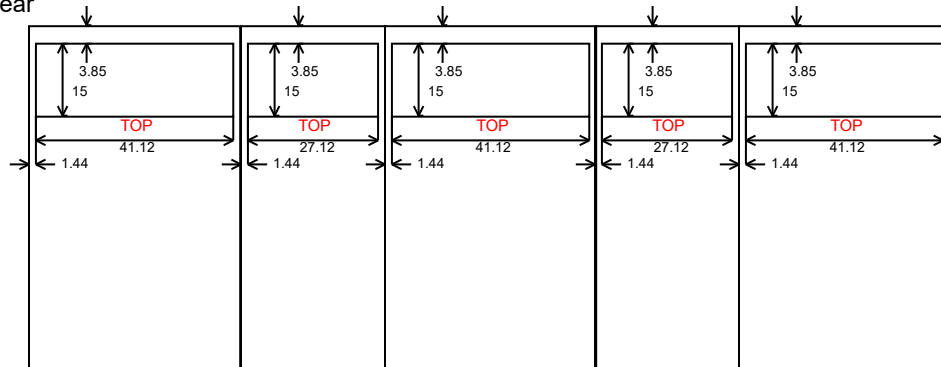

* Shipping Split

Structure	1	2	3	4	5				
Ship-Inches	0	74	0	74	44				
Ship-MM	0	1879	0	1879	1117				
Width-Inches	44	30	44	30	44				
Width-MM	1117	762	1117	762	1117				
Depth-Inches	72	72	72	72	72				
Depth-MM	1828	1828	1828	1828	1828				
Height-Inches	96	96	96	96	96				
Height-MM	2438	2438	2438	2438	2438				
Weight-Lbs	3010	2275	3010	2275	3010				
Weight-Kg	1365	1031	1365	1031	1365				

The information on this document is created by Eaton Corporation. It is disclosed in confidence and it is only to be used for the purpose in which it is supplied.

PREPARED BY
Jacob Simonsen

DATE
8/19/2026

Eaton

Asheville, NC

APPROVED BY

DATE

JOB NAME

Linde Phoenix AZ TSMC Phases AP21-1+ 5

DESIGNATION

13-ES9487.1A

VERSION
11.25.47.0

TYPE

Low Voltage Assemblies

DRAWING TYPE

Customer Appr.

NEG-ALT Number

RH130721X6K2-0005

REVISION

0

DWG SIZE

A

G.O.

ITEM

SHEET

2 of 4

Low Voltage Assemblies Units Information

Str#	Unit	Description/Modifications
1	A	MainMetering - 1/2 High Main Metering Compartment Schweitzer Engineering Laboratories: : SEL-751 Feeder Protection Relay SEL Qty: : 2 Compartment Height: : 1/2 Display Type: :
1	E	Instruments - 1/2 High Metering Compartment Compartment Height: : 1/2
1	C	Breaker - MPS-840 Main, [Drawout/O-E/O], 4000A Magnum PXR Breaker, PXR 25, LSIG Typical Qty/Cable size per Ph(N) & G: (11)-500/Ph, 500G Sensor + Plug (Rated Current In) 4000 Cell Switch: : 8-Form C contacts Wires: : 3 Bus Mounted CTs: : Relaying (Std) VTs: : Relaying
1	D	SPD - 250kA SPD - Standard Feature Package w/Surge Counter
1	H	Blank Compartment
2	A	Instruments - 1/2 High 30" Metering Compartment Compartment Height: : 1/2
2	C	Breaker - MPS-832 Feeder, [Drawout/O-E/O], 3200A Magnum PXR Breaker, PXR 25, LSIG Typical Qty/Cable size per Ph(N) & G: (9)-500/Ph, 500G Sensor + Plug (Rated Current In) 3200 Padlock Provisions: : Metal Frame, Plastic Cover Wires: : 3 Cell Mounted CTs: : Metering
2	D	Blank Compartment
3	A	TransferScheme - 1/2 High Transfer Scheme Operator Interface Compartment Height: : 1/2
3	E	Instruments - 1/2 High Metering Compartment Compartment Height: : 1/2
3	C	Breaker - MPS-840 Tie, [Drawout/O-E/O], 4000A Magnum PXR Breaker, PXR 25, LSIG Sensor + Plug (Rated Current In) 4000 Cell Switch: : 8-Form C contacts Cell Mounted CTs: : Metering
3	D	Blank Compartment
3	H	Blank Compartment
4	A	Instruments - 1/2 High 30" Metering Compartment Compartment Height: : 1/2
4	C	Breaker - MPS-832 Feeder, [Drawout/O-E/O], 3200A Magnum PXR Breaker, PXR 25, LSIG Typical Qty/Cable size per Ph(N) & G: (9)-500/Ph, 500G Sensor + Plug (Rated Current In) 3200 Padlock Provisions: : Metal Frame, Plastic Cover Wires: : 3 Cell Mounted CTs: : Metering
4	D	Blank Compartment

The information on this document is created by Eaton Corporation. It is disclosed in confidence and it is only to be used for the purpose in which it is supplied.

PREPARED BY		DATE	Eaton Asheville, NC		
Jacob Simonsen		8/19/2026			
APPROVED BY		DATE	JOB NAME Linde Phoenix AZ TSMC Phases AP21-1+ 5		
			DESIGNATION 13-ES9487.1A		
VERSION 11.25.47.0		TYPE Low Voltage Assemblies		DRAWING TYPE Customer Appr.	
REVISION 0	DWG SIZE A		G.O.	ITEM	SHEET 3 of 4

5	A	MainMetering - 1/2 High Main Metering Compartment Schweitzer Engineering Laboratories: : SEL-751 Feeder Protection Relay Compartment Height: : 1/2 Display Type: :
5	E	Instruments - 1/2 High Metering Compartment Compartment Height: : 1/2
5	C	Breaker - MPS-840 Main, [Drawout/O-E/O], 4000A Magnum PXR Breaker, PXR 25, LSIG Typical Qty/Cable size per Ph(N) & G: (11)-500/Ph, 500G Sensor + Plug (Rated Current In) 4000 Cell Switch: : 8-Form C contacts Wires: : 3 Bus Mounted CTs: : Relaying (Std) VTs: : Relaying
5	D	SPD - 250kA SPD - Standard Feature Package w/Surge Counter
5	H	Blank Compartment

The information on this document is created by Eaton Corporation. It is disclosed in confidence and it is only to be used for the purpose in which it is supplied.	PREPARED BY		DATE	Eaton Asheville, NC			
	Jacob Simonsen		8/19/2026				
	APPROVED BY		DATE	JOB NAME	Linde Phoenix AZ TSMC Phases AP21-1+ 5		
				DESIGNATION	13-ES9487.1A		
	VERSION			TYPE		DRAWING TYPE	
	11.25.47.0			Low Voltage Assemblies		Customer Appr.	
NEG-ALT Number	REVISION	DWG SIZE		G.O.		ITEM	SHEET
RH130721X6K2-0005	0	A					4 of 4

Comments & Clarifications

The information on this document is created by Eaton Corporation. It is disclosed in confidence and it is only to be used for the purpose in which it is supplied.	PREPARED BY Jacob Simonsen		DATE 8/19/2026	 Powering Business Worldwide	
	APPROVED BY		DATE		
	VERSION 1.0.1.2		TYPE NSP2		DRAWING TYPE Customer Appr.
NEG-ALT Number RH130721X6K2-0005	REVISION 0	DWG SIZE A	G.O.	ITEM	SHEET 1 of 1

MCC General Information

MCC General Information

Wiring Diagram Type	Customer Specific
MCC Quantity	1
Standards	UL845, NEMA, NEC
Special Codes	UL
Service Voltage (3 Phase)	480
Frequency	60
System	3PH3W
Witness Testing	No

PL Color (Rev/Slow)	Amber
Exertherm Continuous Thermal Monitoring System	No

Structure Schedule

There are 16 structure(s).
All structures have a 600 A vertical bus.
Total width of all sections is 300"
Height of all sections is 90"

Enclosure Specifications

Total Structures	16
Type	NEMA 1 Gasketed
Depth	21" Front Mt Only
Height	90"
Horizontal Wireways	9" High, Top & Bottom
Vertical Wireways	4"
Channel Sills	No
150 Watt Space Heaters	No
Master Terminal Block Location	None
IBC/CBC Seismic Qualified	Yes
ABS Certified	No
Bottom Plates	Standard
Space Heater Thermostat	No

Unit Modifications

Device Labels
#14awg, MTW Control Wire
Wiremarkers at Each End
Solid State Overload Relay (Standard C440)
Terminal Block - Latching Pull-Apart, Std.
Motor Management Relay (C445)

Bus System Specifications

Main Bus Amps	2000
Main Bus Bar Plating	Tin
Insulated Horiz. Bus	Yes
1000A/sq in. Cu Bus	No
Vertical Bus Amps	See Structure Schedule
Vertical Bus Material	Tin-Plated Copper
Bus Bracing	65
Ground Bus Location	Bottom
Ground Bus Lug Size	1-#6-350Kcmil
Ground Bus Lug Type	Screw
Plug-in 300A Vert. Gnd. Bus	No
Neutral	None
Horizontal Bus Temperature Rise	50 deg C
Bottom Vert. Bus Barrier	Yes
Vertical Ground Bus	No
Vertical Bus Barrier	Labyrinth, Isolated/ Insulated with shutters
Ground Bus	600

Incoming Line Termination

Cable Entry	Bottom
Splice Kit / Transition	None
MCC Type Match Up	**None**
MCC Type Match Up GO#	
Device: MDNC Main 1 Bkr (1600A trip), Lugs: 10-#1/0-750Kcmil	

MCC Starter Specifications

Wiring Class	1B
Control Voltage	120
Control Voltage Src	Ind CPT
Nameplate Size	1" X 2.5"
Nameplate Color	Black / White Letters
Pilot Dev. Model	10250T
Ind. Light Type	6v Xfmr

The information on this document is created by Eaton Corporation. It is disclosed in confidence and it is only to be used for the purpose in which it is supplied.	PREPARED BY Jacob Simonsen		DATE 8/19/2026	Eaton Fayetteville, NC		
	APPROVED BY		DATE	JOB NAME Linde Phoenix AZ TSMC Phases AP21-1+ 5		
	VERSION 1.0.3.7			DESIGNATION 480V MCC#1 15-ES9487.1		
			TYPE Freedom Arc Resistant MCC	DRAWING TYPE Customer Appr.		
NEG-ALT Number RH130721X6K2-0005	REVISION	DWG SIZE A	G.O.	ITEM	SHEET 1 of 11	


Notes/Special Instructions

External ARMS light and switch - unit 2M
 Arms sel switch padlock cover - unit 2M
 Wire ARMS to TB for external indication - unit 2M
 Direct bottom feed approved by Linde - unit 2M
 MCB door bolted shut - add warning label that voltage is present - unit 2M
 Breaker terminal shield - unit 3M
 Control power to ATS main breakers - unit 3M
 CPT connected to line side of main breakers - unit 3M
 PTs to ATS - unit 3K
 PTs connected to line said of main breakers - unit 3K
 6X panel for ATS controls - unit 3H
 Breaker terminal shield - unit 5B
 Breaker terminal shield - unit 5D
 Breaker terminal shield - unit 5F
 Breaker terminal shield - unit 5H
 Breaker terminal shield - unit 5K
 Breaker terminal shield - unit 5M
 Breaker terminal shield - unit 7B
 Breaker terminal shield - unit 7D
 Breaker terminal shield - unit 7F
 Control wire before CPT to be black and labeled "Hot with line side bus energized" - unit 7M
 Breaker terminal shield - unit 7M
 C445 is place holder for SEL-849 - unit 7M
 External ARMS light and switch - unit 8M
 Arms sel switch padlock cover - unit 8M
 Wire ARMS to TB for external indication - unit 8M
 Direct bottom feed approved by Linde - unit 8M
 MCB door bolted shut - add warning label that voltage is present - unit 8M
 Breaker terminal shield - unit 10B
 Breaker terminal shield - unit 10D
 Breaker terminal shield - unit 10F
 Breaker terminal shield - unit 10H
 Breaker terminal shield - unit 10K
 Breaker terminal shield - unit 10M
 Control wire before CPT to be black and labeled "Hot with line side bus energized" - unit 11M
 Breaker to be NGH 800AF/T - ARMS not required - unit 11M
 C445 is place holder for SEL-849 - unit 11M
 Breaker terminal shield - unit 11C
 Breaker terminal shield - unit 12D
 Breaker terminal shield - unit 12B
 Breaker terminal shield - unit 12F
 Breaker terminal shield - unit 12H
 Breaker terminal shield - unit 12K
 Breaker terminal shield - unit 12M
 Breaker terminal shield - unit 14G
 Control power to ATS main breakers - unit 14G
 CPT connected to line side of main breakers - unit 14G
 Breaker terminal shield - unit 14M
 External ARMS light and switch - unit 15M

The information on this document is created by Eaton Corporation. It is disclosed in confidence and it is only to be used for the purpose in which it is supplied.	PREPARED BY Jacob Simonsen		DATE 8/19/2026	Eaton Fayetteville, NC		
	APPROVED BY		DATE	JOB NAME Linde Phoenix AZ TSMC Phases AP21-1+ 5		
				DESIGNATION 480V MCC#1 15-ES9487.1		
	VERSION 1.0.3.7		TYPE Freedom Arc Resistant MCC		DRAWING TYPE Customer Appr.	
NEG-ALT Number RH130721X6K2-0005	REVISION	DWG SIZE A	G.O.	ITEM	SHEET 2 of 11	




Arms sel switch padlock cover - unit 15M
 Wire ARMS to TB for external indication - unit 15M
 Direct bottom feed approved by Linde - unit 15M
 MCB door bolted shut - add warning label that voltage is present - unit 15M
 Master NP to read "480V MCC#1 11-ES9487.1"
 Control wire above 150VAC to be black - add caution label to bucket doors
 Include Magnum breaker lifting yoke to work with lift truck
 FAY Standard Main-Tie-Main transfer scheme
 Breaker terminal shield - unit 4E
 Breaker terminal shield - unit 4G
 Breaker terminal shield - unit 4J
 Breaker terminal shield - unit 4M
 Breaker terminal shield - unit 6B
 Breaker terminal shield - unit 6D
 Breaker terminal shield - unit 6F
 Breaker terminal shield - unit 6H
 Breaker terminal shield - unit 6K
 Breaker terminal shield - unit 6M
 Motor operators
 Breaker terminal shield - unit 13B
 Breaker terminal shield - unit 13D
 Breaker terminal shield - unit 13F

The information on this document is created by Eaton Corporation. It is disclosed in confidence and it is only to be used for the purpose in which it is supplied.	PREPARED BY Jacob Simonsen		DATE 8/19/2026	Eaton Fayetteville, NC		
	APPROVED BY		DATE	JOB NAME Linde Phoenix AZ TSMC Phases AP21-1+ 5		
	VERSION 1.0.3.7			DESIGNATION 480V MCC#1 15-ES9487.1		
				TYPE Freedom Arc Resistant MCC		DRAWING TYPE Customer Appr.
NEG-ALT Number RH130721X6K2-0005	REVISION	DWG SIZE A	G.O.	ITEM	SHEET 3 of 11	

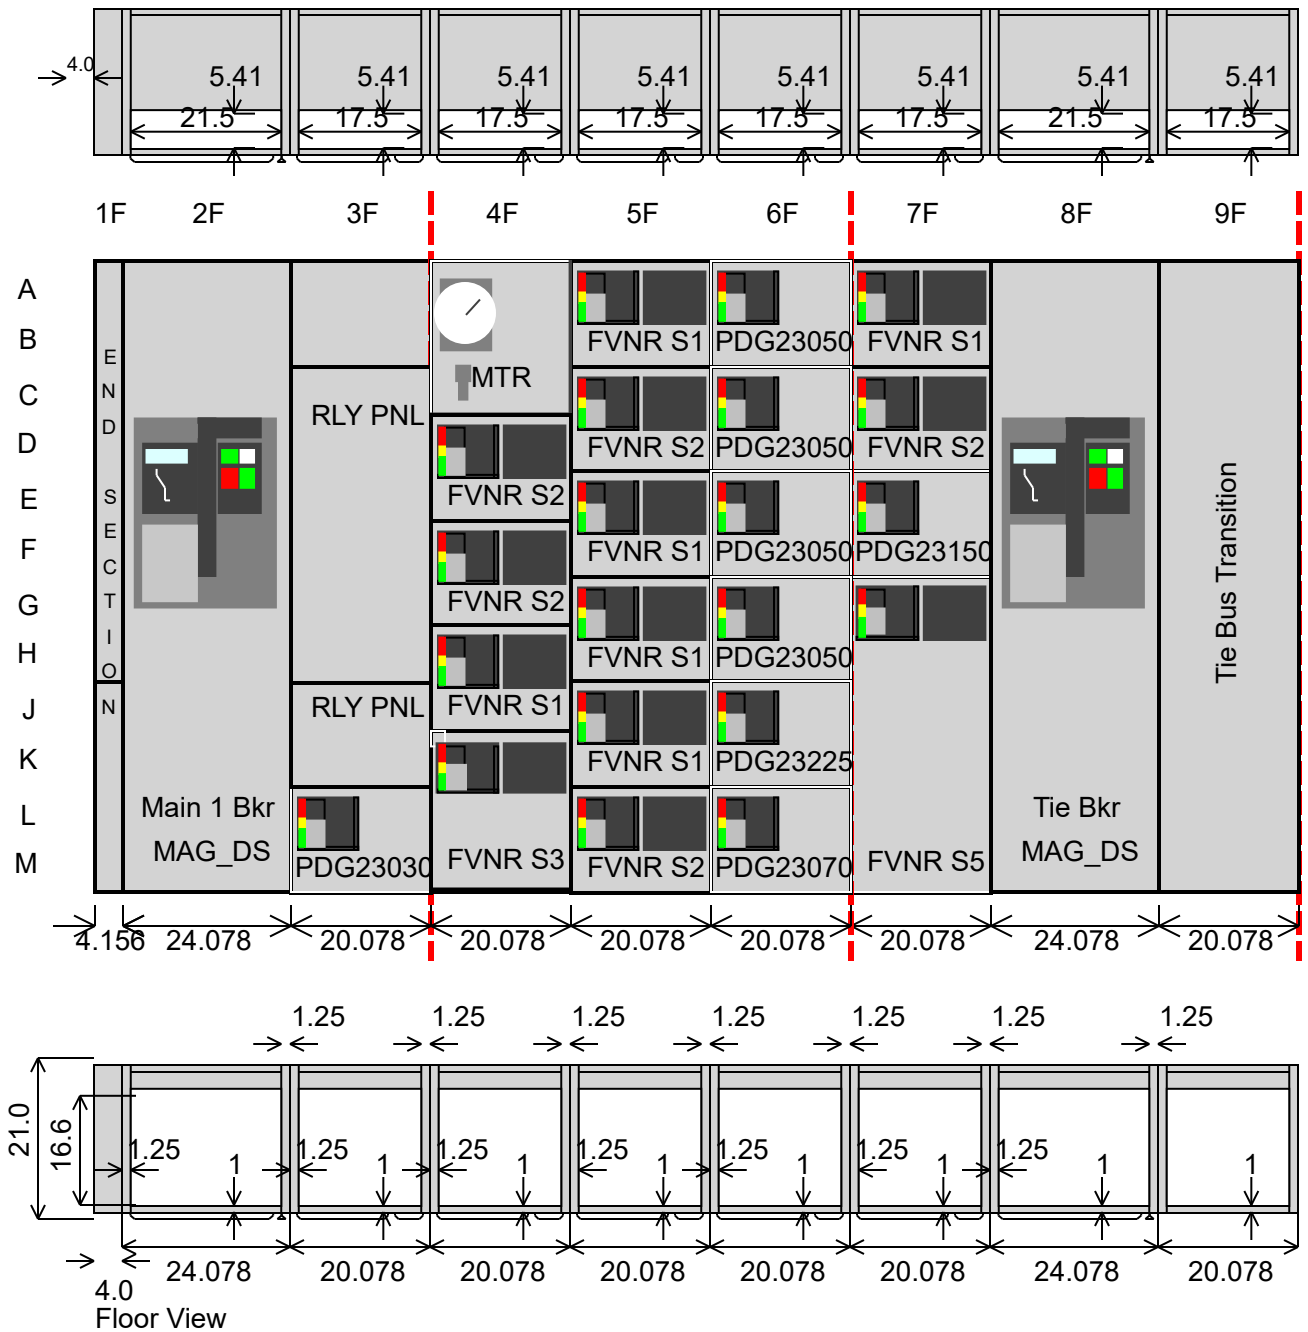

The information on this document is created by Eaton Corporation. It is disclosed in confidence and it is only to be used for the purpose in which it is supplied.

PREPARED BY Jacob Simonsen APPROVED BY VERSION 1.0.3.7	DATE 8/19/2026		Eaton Fayetteville, NC		
	JOB NAME Linde Phoenix AZ TSMC Phases AP21-1+ 5		DESIGNATION 480V MCC#1 15-ES9487.1		
	TYPE Freedom Arc Resistant MCC		DRAWING TYPE Customer Appr.		
	REVISION	DWG SIZE A	G.O.	ITEM	SHEET 4 of 11

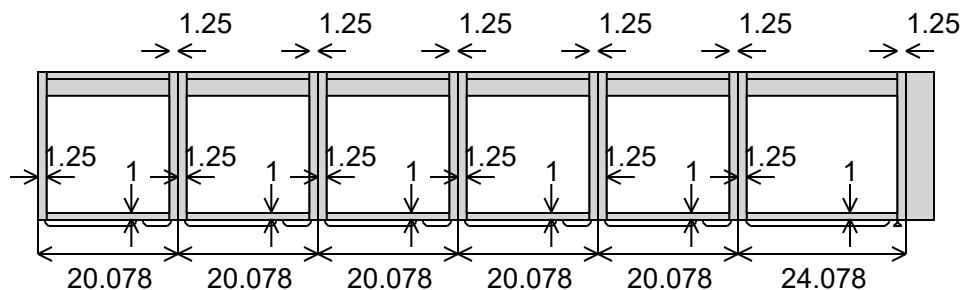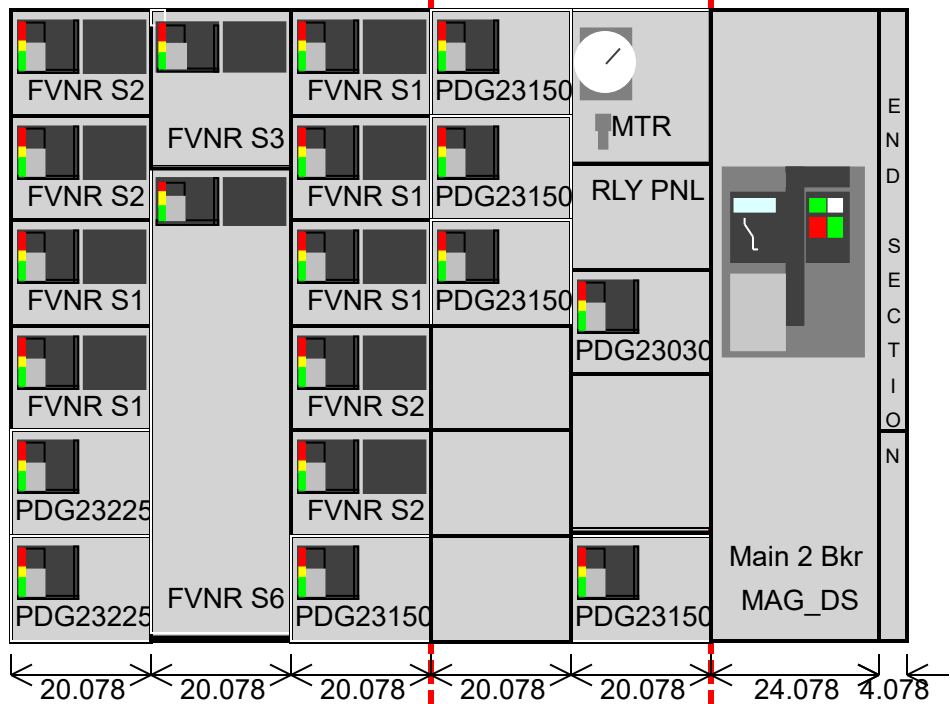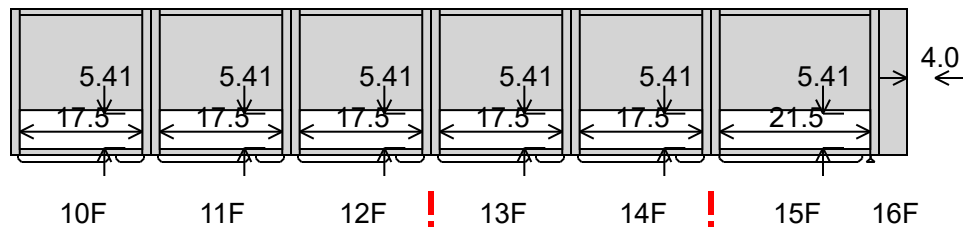

The information on this document is created by Eaton Corporation. It is disclosed in confidence and it is only to be used for the purpose in which it is supplied.

PREPARED BY		DATE	Eaton		Fayetteville, NC	
Jacob Simonsen		8/19/2026				
APPROVED BY		DATE	JOB NAME Linde Phoenix AZ TSMC Phases AP21-1+ 5			
			DESIGNATION 480V MCC#1 15-ES9487.1			
VERSION			TYPE		DRAWING TYPE	
1.0.3.7			Freedom Arc Resistant MCC		Customer Appr.	
REVISION	DWG SIZE		G.O.		ITEM	SHEET
	A					5 of 11

Unit	Nameplate	Description	Class	Starter Size HP/FLA Wire Diag.	Bkr/Sw Poles Trip/Clip	Unit Features
2M	UNIT 100A BUS A MAIN	MDNC Main 1 Bkr (1600A trip), Lugs: 10-#1/0-750Kcmil		Y	MDNC 3P 1600	1 Additional 100VA CPT 1 Breaker Thermal Mag 1 Standard Trip 1 Bell Alarm Contact 1 Auxiliary Switch 2A/2B
3H	TRANSFER CONTROLS	36 in. blank relay panel		Y		
3K	BUS A MAIN BREAKER PT'S	12 in. blank relay panel		Y		
3M	BUS A MAIN BREAKER CONTROL POWER	PDG2 Bkr (30A trip)		Y	PDG2 3P 30	1 PD TH FIX STD RAT STD INT 1 Standard Trip
4C	UNIT 101A	Voltmeter and Switch		&ASU 9487 E-ZK N19-HW-NEMA		1 Additional X-Space
4E	UNIT 102	FVNR Starter Size 2 [TM Ckt Brk]	F206	2 20 &ASU 9487 E-ZK 50 N2.2-HW-NEMA	Tm. Brk. 3P	2 Size 1-4 Starter - Normally Open 2 Size 1-4 Starter - Normally Closed 1 PD PXR 20 Stand. Rating, Stand. Inter 1 Size 2, STARTER-100VA Typical, w/extra 50VA 1 Red Run 1 Bkr Aux-1NO/1NC
4G	UNIT 103	FVNR Starter Size 2 [TM Ckt Brk]	F206	2 20 &ASU 9487 E-ZK 50 N2.1-HW-NEMA	Tm. Brk. 3P	1 Size 1, STARTER-100VA Typical, w/extra 50VA 2 Size 1-4 Starter - Normally Open 2 Size 1-4 Starter - Normally Closed 1 PD PXR 20 Stand. Rating, Stand. Inter 1 Red Run 1 Bkr Aux-1NO/1NC
4J	UNIT 104	FVNR Starter Size 1 [HMCP]	F206	1 1.5 &ASU 9487 E-ZK 7 N2.1-HW-NEMA	HMCP 3P	1 Size 1, STARTER-100VA Typical, w/extra 50VA 2 Size 1-4 Starter - Normally Open 2 Size 1-4 Starter - Normally Closed 1 Standard Trip 1 Breaker HMCP 1 Red Run
4M	UNIT 123	FVNR Starter Size 3 [TM Ckt Brk]	F206	3 50 &ASU 9487 E-ZK 70 N2.2-HW-NEMA	Tm. Brk. 3P	1 Size 3, STARTER-150VA Typical, w/extra 50VA 2 Size 1-4 Starter - Normally Open 2 Size 1-4 Starter - Normally Closed 1 Bkr Aux-1NO/1NC 1 PD PXR 20 Stand. Rating, Stand. Inter 1 Red Run
5B	UNIT 105	FVNR Starter Size 1 [TM Ckt Brk]	F206	1 3 &ASU 9487 E-ZK 15 N2.1-HW-NEMA	Tm. Brk. 3P	1 Size 1, STARTER-100VA Typical, w/extra 50VA 2 Size 1-4 Starter - Normally Open 2 Size 1-4 Starter - Normally Closed 1 Standard Trip 1 PD TH FIX STD RAT STD INT 1 Red Run
5D	UNIT 106	FVNR Starter Size 2	F206	2	Tm. Brk.	2 Size 1-4 Starter - Normally Open

The information on this document is created by Eaton Corporation. It is disclosed in confidence and it is only to be used for the purpose in which it is supplied.	PREPARED BY		DATE	Eaton Fayetteville, NC		
	Jacob Simonsen		8/19/2026			
	APPROVED BY		DATE	JOB NAME		
				Linde Phoenix AZ TSMC Phases AP21-1+ 5		
NEG-ALT Number RH130721X6K2-0005	VERSION		TYPE	DRAWING TYPE		
	1.0.3.7		Freedom Arc Resistant MCC	Customer Appr.		
	REVISION	DWG SIZE	G.O.	ITEM	SHEET	
		A			6 of 11	

Unit	Nameplate	Description	Class	Starter Size HP/FLA Wire Diag.	Bkr/Sw Poles Trip/Clip	Unit Features
		[TM Ckt Brk]		25 &ASU 9487 E-ZK 70 N2.2-HW-NEMA	3P	2 Size 1-4 Starter - Normally Closed 1 PD PXR 20 Stand. Rating, Stand. Inter 1 Size 2, STARTER-100VA Typical, w/extra 50VA 1 Red Run 1 Bkr Aux-1NO/1NC
5F	UNIT 107	FVNR Starter Size 1 [TM Ckt Brk]	F206	1 7.5 &ASU 9487 E-ZK 30 N2.1-HW-NEMA	Tm. Brk. 3P	1 Size 1, STARTER-100VA Typical, w/extra 50VA 2 Size 1-4 Starter - Normally Open 2 Size 1-4 Starter - Normally Closed 1 Standard Trip 1 PD TH FIX STD RAT STD INT 1 Red Run
5H	UNIT 108	FVNR Starter Size 1 [HMCP]	F206	1 0.75 &ASU 9487 E-ZK 3 N2.1-HW-NEMA	HMCP 3P	1 Size 1, STARTER-100VA Typical, w/extra 50VA 2 Size 1-4 Starter - Normally Open 2 Size 1-4 Starter - Normally Closed 1 Standard Trip 1 Breaker HMCP 1 Red Run
5K	UNIT 110	FVNR Starter Size 1 [TM Ckt Brk]	F206	1 5 &ASU 9487 E-ZK 20 N2.1-HW-NEMA	Tm. Brk. 3P	1 Size 1, STARTER-100VA Typical, w/extra 50VA 2 Size 1-4 Starter - Normally Open 2 Size 1-4 Starter - Normally Closed 1 Standard Trip 1 PD TH FIX STD RAT STD INT 1 Red Run
5M	UNIT 111	FVNR Starter Size 2 [TM Ckt Brk]	F206	2 25 &ASU 9487 E-ZK 50 N2.1-HW-NEMA	Tm. Brk. 3P	1 Size 1, STARTER-100VA Typical, w/extra 50VA 2 Size 1-4 Starter - Normally Open 2 Size 1-4 Starter - Normally Closed 1 PD PXR 20 Stand. Rating, Stand. Inter 1 Red Run 1 Bkr Aux-1NO/1NC
6B	UNIT 113	PDG2 Bkr (50A trip)			PDG2 3P 50	1 PD PXR 20 Stand. Rating, Stand. Inter
6D	UNIT 114	PDG2 Bkr (50A trip)		Y	PDG2 3P 50	1 PD PXR 20 Stand. Rating, Stand. Inter
6F	UNIT 115	PDG2 Bkr (50A trip)		Y	PDG2 3P 50	1 PD PXR 20 Stand. Rating, Stand. Inter
6H	UNIT 116	PDG2 Bkr (50A trip)		Y	PDG2 3P 50	1 PD PXR 20 Stand. Rating, Stand. Inter
6K	UNIT 117	PDG2 Bkr (225A trip)		Y	PDG2 3P 225	1 PD PXR 20 Stand. Rating, Stand. Inter
The information on this document is created by Eaton Corporation. It is disclosed in confidence and it is only to be used for the purpose in which it is supplied.		PREPARED BY	DATE	Eaton Fayetteville, NC		
		Jacob Simonsen	8/19/2026	JOB NAME	Linde Phoenix AZ TSMC Phases AP21-1+ 5	
		APPROVED BY	DATE	DESIGNATION	480V MCC#1 15-ES9487.1	
		VERSION	TYPE	DRAWING TYPE		
NEG-ALT Number		REVISION	DWG SIZE	G.O.	ITEM	SHEET
RH130721X6K2-0005			A			7 of 11

Unit	Nameplate	Description	Class	Starter Size HP/FLA Wire Diag.	Bkr/Sw Poles Trip/Clip	Unit Features
6M	UNIT 118	PDG2 Bkr (70A trip)			PDG2 3P 70	1 PD PXR 20 Stand. Rating, Stand. Inter
				Y		
7B	UNIT 119	FVNR Starter Size 1 [TM Ckt Brk]	F206	1 10 &ASU 9487 E-ZK 20 N2.1-HW-NEMA	Tm. Brk. 3P	1 Size 1, STARTER-100VA Typical, w/extra 50VA 2 Size 1-4 Starter - Normally Open 2 Size 1-4 Starter - Normally Closed 1 Standard Trip 1 PD TH FIX STD RAT STD INT 1 Red Run
7D	UNIT 121	FVNR Starter Size 2 [TM Ckt Brk]	F206	2 25 &ASU 9487 E-ZK 50 N2.2-HW-NEMA	Tm. Brk. 3P	2 Size 1-4 Starter - Normally Open 2 Size 1-4 Starter - Normally Closed 1 PD PXR 20 Stand. Rating, Stand. Inter 1 Size 2, STARTER-100VA Typical, w/extra 50VA 1 Red Run 1 Bkr Aux-1NO/1NC
7F	UNIT 124	PDG2 Bkr (150A trip)			PDG2 3P 150	1 PD PXR 20 Stand. Rating, Stand. Inter
				Y		
7M	UNIT 109	FVNR Starter Size 5 [TM Ckt Brk]	F206	5 200 Y	Tm. Brk. 3P 400	2 Size 5-6 Starter - Normally Open 2 Size 5-6 Starter - Normally Closed 1 PD PXR 20 Stand. Rating, Stand. Inter 1 Red Run 1 C-H Model D15 NEMA A600, 4 Pole 1 Size 5, STARTER-250VA Typical, w/extra 50VA 1 Description missing for NOCATNUM
8M	UNIT 100A BUS A MAIN	MDNC Main Tie Bkr (1600A trip), Lugs: 10-#1/0-750Kcmil		Y	MDNC 3P 1600	1 Additional 100VA CPT 1 Breaker Thermal Mag 1 Standard Trip 1 Bell Alarm Contact 1 Auxiliary Switch 2A/2B
9M		Description missing for		Y		
10B	UNIT 126	FVNR Starter Size 2 [TM Ckt Brk]	F206	2 20 &ASU 9487 E-ZK 50 N2.2-HW-NEMA	Tm. Brk. 3P	2 Size 1-4 Starter - Normally Open 2 Size 1-4 Starter - Normally Closed 1 PD PXR 20 Stand. Rating, Stand. Inter 1 Size 2, STARTER-100VA Typical, w/extra 50VA 1 Red Run 1 Bkr Aux-1NO/1NC
10D	UNIT 127	FVNR Starter Size 2 [TM Ckt Brk]	F206	2 20 &ASU 9487 E-ZK 50 N2.1-HW-NEMA	Tm. Brk. 3P	1 Size 1, STARTER-100VA Typical, w/extra 50VA 2 Size 1-4 Starter - Normally Open 2 Size 1-4 Starter - Normally Closed 1 PD PXR 20 Stand. Rating, Stand. Inter 1 Red Run 1 Bkr Aux-1NO/1NC
10F	UNIT 128	FVNR Starter Size 1	F206	1	HMCP	1 Size 1, STARTER-100VA Typical,
The information on this document is created by Eaton Corporation. It is disclosed in confidence and it is only to be used for the purpose in which it is supplied.		PREPARED BY	DATE	Eaton Fayetteville, NC		
		Jacob Simonsen	8/19/2026	JOB NAME	Linde Phoenix AZ TSMC Phases AP21-1+ 5	
		APPROVED BY	DATE	DESIGNATION	480V MCC#1 15-ES9487.1	
		VERSION	TYPE	DRAWING TYPE		
		1.0.3.7	Freedom Arc Resistant MCC	Customer Appr.		
NEG-ALT Number	REVISION	DWG SIZE	G.O.	ITEM	SHEET	
RH130721X6K2-0005		A			8 of 11	

Unit	Nameplate	Description	Class	Starter Size HP/FLA Wire Diag.	Bkr/Sw Poles Trip/Clip	Unit Features
		[HMCP]		1.5 &ASU 9487 E-ZK 7 N2.1-HW-NEMA	3P	w/extra 50VA 2 Size 1-4 Starter - Normally Open 2 Size 1-4 Starter - Normally Closed 1 Standard Trip 1 Breaker HMCP 1 Red Run
10H	UNIT 129	FVNR Starter Size 1 [TM Ckt Brk]	F206	1 3 &ASU 9487 E-ZK 15 N2.1-HW-NEMA	Tm. Brk. 3P 15	1 Size 1, STARTER-100VA Typical, w/extra 50VA 2 Size 1-4 Starter - Normally Open 2 Size 1-4 Starter - Normally Closed 1 Standard Trip 1 PD TH FIX STD RAT STD INT 1 Red Run
10K	UNIT 131	PDG2 Bkr (225A trip)			PDG2	1 PD PXR 20 Stand. Rating, Stand. Inter
				Y	3P 225	
10M	UNIT 132	PDG2 Bkr (225A trip)			PDG2	1 PD PXR 20 Stand. Rating, Stand. Inter
				Y	3P 225	
11C	UNIT 138	FVNR Starter Size 3 [TM Ckt Brk]	F206	3 50 &ASU 9487 E-ZK 70 N2.2-HW-NEMA	Tm. Brk. 3P 70	1 Size 3, STARTER-150VA Typical, w/extra 50VA 2 Size 1-4 Starter - Normally Open 2 Size 1-4 Starter - Normally Closed 1 Bkr Aux-1NO/1NC 1 PD PXR 20 Stand. Rating, Stand. Inter 1 Red Run
11M	UNIT 130	FVNR Starter Size 6 [TM Ckt Brk]	F206	6 300 Y	Tm. Brk. 3P 600	1 250VA Individual CPT, Fused 2 Size 5-6 Starter - Normally Open 2 Size 5-6 Starter - Normally Closed 1 PD PXR 20 Stand. Rating, Stand. Inter 1 Red Run 1 C-H Model D15 NEMA A600, 4 Pole 1 Size 6, STARTER-250VA Typical, w/extra 50VA
12B	UNIT 133	FVNR Starter Size 1 [TM Ckt Brk]	F206	1 10 &ASU 9487 E-ZK 20 N2.1-HW-NEMA	Tm. Brk. 3P 20	1 Size 1, STARTER-100VA Typical, w/extra 50VA 2 Size 1-4 Starter - Normally Open 2 Size 1-4 Starter - Normally Closed 1 Standard Trip 1 PD TH FIX STD RAT STD INT 1 Red Run
12D	UNIT 134	FVNR Starter Size 1 [TM Ckt Brk]	F206	1 10 &ASU 9487 E-ZK 20 N2.1-HW-NEMA	Tm. Brk. 3P 20	1 Size 1, STARTER-100VA Typical, w/extra 50VA 2 Size 1-4 Starter - Normally Open 2 Size 1-4 Starter - Normally Closed 1 Standard Trip 1 PD TH FIX STD RAT STD INT 1 Red Run
12F	UNIT 135	FVNR Starter Size 1 [HMCP]	F206	1 10	HMCP 3P	1 Size 1, STARTER-100VA Typical, w/extra 50VA 2 Size 1-4 Starter - Normally Open
The information on this document is created by Eaton Corporation. It is disclosed in confidence and it is only to be used for the purpose in which it is supplied.		PREPARED BY	DATE	Eaton Fayetteville, NC		
		Jacob Simonsen	8/19/2026	JOB NAME	Linde Phoenix AZ TSMC Phases AP21-1+ 5	
		APPROVED BY	DATE	DESIGNATION	480V MCC#1 15-ES9487.1	
		VERSION	TYPE	DRAWING TYPE		
		1.0.3.7	Freedom Arc Resistant MCC	Customer Appr.		
NEG-ALT Number	REVISION	DWG SIZE	G.O.	ITEM	SHEET	
RH130721X6K2-0005		A			9 of 11	

Unit	Nameplate	Description	Class	Starter Size HP/FLA Wire Diag.	Bkr/Sw Poles Trip/Clip	Unit Features
				&ASU 9487 E-ZK 15 N2.1-HW-NEMA		2 Size 1-4 Starter - Normally Closed 1 Standard Trip 1 Breaker HMCP 1 Red Run
12H	UNIT 136	FVNR Starter Size 2 [TM Ckt Brk]	F206	2 25 &ASU 9487 E-ZK 50 N2.2-HW-NEMA	Tm. Brk. 3P	2 Size 1-4 Starter - Normally Open 2 Size 1-4 Starter - Normally Closed 1 PD PXR 20 Stand. Rating, Stand. Inter 1 Size 2, STARTER-100VA Typical, w/extra 50VA 1 Red Run 1 Bkr Aux-1NO/1NC
12K	UNIT 137	FVNR Starter Size 2 [TM Ckt Brk]	F206	2 25 &ASU 9487 E-ZK 50 N2.2-HW-NEMA	Tm. Brk. 3P	2 Size 1-4 Starter - Normally Open 2 Size 1-4 Starter - Normally Closed 1 PD PXR 20 Stand. Rating, Stand. Inter 1 Size 2, STARTER-100VA Typical, w/extra 50VA 1 Red Run 1 Bkr Aux-1NO/1NC
12M	UNIT 139	PDG2 Bkr (150A trip)			PDG2 3P 150	1 PD PXR 20 Stand. Rating, Stand. Inter
13B		PDG2 Bkr (150A trip)		Y	PDG2 3P 150	1 PD PXR 20 Stand. Rating, Stand. Inter
13D		PDG2 Bkr (150A trip)		Y	PDG2 3P 150	1 PD PXR 20 Stand. Rating, Stand. Inter
13F		PDG2 Bkr (150A trip)		Y	PDG2 3P 150	1 PD PXR 20 Stand. Rating, Stand. Inter
13H		12" Door		Y		
13K		12" Door		Y		
13M		12" Door		Y		
14C	UNIT 101B	Voltmeter and Switch		&ASU 9487 E-ZK N19-HW-NEMA		1 Additional X-Space
14E	BUS B MAIN BREAKER PT'S	12 in. blank relay panel		Y		
14G	BUS A MAIN BREAKER CONTROL POWER	PDG2 Bkr (30A trip)		Y	PDG2 3P 30	1 PD TH FIX STD RAT STD INT 1 Standard Trip
14K		18" Door		Y		
14M	UNIT 140	PDG2 Bkr (150A trip)		Y	PDG2 3P 150	1 PD PXR 20 Stand. Rating, Stand. Inter
15M	UNIT 100A	MDNC Main 3 Bkr			MDNC	1 Additional 100VA CPT

The information on this document is created by Eaton Corporation. It is disclosed in confidence and it is only to be used for the purpose in which it is supplied.	PREPARED BY	DATE	Eaton Fayetteville, NC		
	Jacob Simonsen	8/19/2026	JOB NAME	Linde Phoenix AZ TSMC Phases AP21-1+ 5	
	APPROVED BY	DATE	DESIGNATION	480V MCC#1 15-ES9487.1	
	VERSION	TYPE	DRAWING TYPE		
	1.0.3.7	Freedom Arc Resistant MCC	Customer Appr.		
NEG-ALT Number	REVISION	DWG SIZE	G.O.	ITEM	SHEET
RH130721X6K2-0005		A			10 of 11

<u>Unit</u>	<u>Nameplate</u>	<u>Description</u>	<u>Class</u>	<u>Starter Size</u> <u>HP/FLA</u> <u>Wire Diag.</u>	<u>Bkr/Sw</u> <u>Poles</u> <u>Trip/Clip</u>	<u>Unit</u> <u>Features</u>
BUS A MAIN		(1600A trip), Lugs: 10-#1/0-750Kcmil		Y	3P 1600	1 Breaker Thermal Mag 1 Standard Trip 1 Bell Alarm Contact 1 Auxiliary Switch 2A/2B

The information on this document is created by Eaton Corporation. It is disclosed in confidence and it is only to be used for the purpose in which it is supplied.	PREPARED BY		DATE	Eaton Fayetteville, NC	
	Jacob Simonsen		8/19/2026		
	APPROVED BY		DATE	JOB NAME	
				Linde Phoenix AZ TSMC Phases AP21-1+ 5	
		DESIGNATION		480V MCC#1 15-ES9487.1	
		VERSION		TYPE	DRAWING TYPE
		1.0.3.7		Freedom Arc Resistant MCC	Customer Appr.
NEG-ALT Number	REVISION	DWG SIZE	G.O.	ITEM	SHEET
RH130721X6K2-0005		A			11 of 11

MCC General Information

MCC General Information

Wiring Diagram Type	Customer Specific
MCC Quantity	1
Standards	UL845, NEMA, NEC
Special Codes	UL
Service Voltage (3 Phase)	480
Frequency	60
System	3PH3W
Witness Testing	No

PL Color (Rev/Slow)	Amber
Exertherm Continuous Thermal Monitoring System	No

Structure Schedule

There are 12 structure(s).
All structures have a 600 A vertical bus.
Total width of all sections is 212"
Height of all sections is 90"

Enclosure Specifications

Total Structures	12
Type	NEMA 1 Gasketed
Depth	21" Front Mt Only
Height	90"
Horizontal Wireways	9" High, Top & Bottom
Vertical Wireways	4"
Channel Sills	No
150 Watt Space Heaters	No
Master Terminal Block Location	None
IBC/CBC Seismic Qualified	Yes
ABS Certified	No
Bottom Plates	Standard
Space Heater Thermostat	No

Unit Modifications

#14awg, MTW Control Wire
Wiremarkers at Each End
Solid State Overload Relay (Standard C440)
Terminal Block - Latching Pull-Apart, Std.
Device Labels
Motor Management Relay (C445)

Bus System Specifications

Main Bus Amps	2500
Main Bus Bar Plating	Tin
Insulated Horiz. Bus	Yes
1000A/sq in. Cu Bus	No
Vertical Bus Amps	See Structure Schedule
Vertical Bus Material	Tin-Plated Copper
Bus Bracing	65
Ground Bus Location	Bottom
Ground Bus Lug Size	1-#6-350Kcmil
Ground Bus Lug Type	Screw
Plug-in 300A Vert. Gnd. Bus	No
Neutral	None
Horizontal Bus Temperature Rise	50 deg C
Bottom Vert. Bus Barrier	Yes
Vertical Ground Bus	No
Vertical Bus Barrier	Labyrinth, Isolated/ Insulated with shutters
Ground Bus	800

Incoming Line Termination

Cable Entry	Bottom
Splice Kit / Transition	None
MCC Type Match Up	**None**
MCC Type Match Up GO#	
Device: MDPXR Main Bkr (2500A trip), Lugs: 5-#4-750Kcmil	

MCC Starter Specifications

Wiring Class	1B
Control Voltage	120
Control Voltage Src	Ind CPT
Nameplate Size	1" X 2.5"
Nameplate Color	Black / White Letters
Pilot Dev. Model	10250T
Ind. Light Type	6v Xfmr

The information on this document is created by Eaton Corporation. It is disclosed in confidence and it is only to be used for the purpose in which it is supplied.	PREPARED BY		DATE	Eaton Fayetteville, NC		
	Jacob Simonsen		8/19/2026			
	APPROVED BY		DATE	JOB NAME	Linde Phoenix AZ TSMC Phases AP21-1+ 5	
				DESIGNATION	480V MCC#1A 13-ES9487.1A	
	VERSION			TYPE	DRAWING TYPE	
	1.0.3.7			Freedom Arc Resistant MCC	Customer Appr.	
NEG-ALT Number	REVISION	DWG SIZE		G.O.	ITEM	SHEET
RH130721X6K2-0005		A				1 of 10

Notes/Special Instructions


Master NP to read "480V MCC#1A 9-ES9487.1A"
 Control wire above 150VAC to be black - add caution label to bucket doors
 External ARMS light and switch - unit 2M
 Arms sel switch padlock cover - unit 2M
 Wire ARMS to TB for external indication - unit 2M
 Direct bottom feed approved by Linde - unit 2M
 MCB door bolted shut - add warning label that voltage is present - unit 2M
 Breaker terminal shield - unit 3E
 Breaker terminal shield - unit 3G
 Breaker terminal shield - unit 3J
 Breaker terminal shield - unit 3M
 Breaker terminal shield - unit 4M
 Breaker terminal shield - unit 4K
 Breaker terminal shield - unit 4H
 Breaker terminal shield - unit 4F
 Breaker terminal shield - unit 4D
 Breaker terminal shield - unit 4B
 Breaker terminal shield - unit 5D
 Breaker terminal shield - unit 5B
 Breaker terminal shield - unit 5F
 Breaker terminal shield - unit 5H
 Breaker terminal shield - unit 5K
 Breaker terminal shield - unit 5M
 Breaker terminal shield - unit 6M
 Breaker terminal shield - unit 6K
 Breaker terminal shield - unit 6G
 VFD control relay coil surge supressor - unit 6G
 Breaker terminal shield - unit 8G
 VFD control relay coil surge supressor - unit 8G
 Breaker terminal shield - unit 8J
 Breaker terminal shield - unit 8M
 Control wire before CPT to be black and labeled "Hot with line side bus energized" - unit 9M
 Breaker to be NGH 800AF/T - ARMS not required - unit 9M
 C445 is place holder for SEL-849 - unit 9M
 Breaker terminal shield - unit 9C
 Breaker terminal shield - unit 10F
 Breaker terminal shield - unit 10K
 Breaker terminal shield - unit 10M
 Breaker terminal shield - unit 10B
 Breaker terminal shield - unit 10D
 Breaker terminal shield - unit 10H
 Breaker terminal shield - unit 11B
 Breaker terminal shield - unit 11D
 Breaker terminal shield - unit 11F
 Control wire before CPT to be black and labeled "Hot with line side bus energized" - unit 11M
 Breaker terminal shield - unit 11M
 C445 is place holder for SEL-849 - unit 11M
 Breaker terminal shield - unit 7M
 VFD control relay coil surge supressor - unit 7M

The information on this document is created by Eaton Corporation. It is disclosed in confidence and it is only to be used for the purpose in which it is supplied.	PREPARED BY		DATE	Eaton Fayetteville, NC		
	Jacob Simonsen		8/19/2026			
	APPROVED BY		DATE	JOB NAME	Linde Phoenix AZ TSMC Phases AP21-1+ 5	
				DESIGNATION	480V MCC#1A 13-ES9487.1A	
NEG-ALT Number RH130721X6K2-0005	VERSION		TYPE		DRAWING TYPE	
	1.0.3.7		Freedom Arc Resistant MCC		Customer Appr.	
	REVISION	DWG SIZE	G.O.	ITEM	SHEET	
		A			2 of 10	

Motor operators

The information on this document is created by Eaton Corporation. It is disclosed in confidence and it is only to be used for the purpose in which it is supplied.

The information on this document is created by Eaton Corporation. It is disclosed in confidence and it is only to be used for the purpose in which it is supplied.	PREPARED BY	DATE	Eaton Fayetteville, NC		
	Jacob Simonsen	8/19/2026			
	APPROVED BY	DATE	JOB NAME	Linde Phoenix AZ TSMC Phases AP21-1+ 5	
			DESIGNATION	480V MCC#1A 13-ES9487.1A	
	VERSION		TYPE	DRAWING TYPE	
	1.0.3.7		Freedom Arc Resistant MCC	Customer Appr.	
NEG-ALT Number	REVISION	DWG SIZE	G.O.	ITEM	SHEET
RH130721X6K2-0005		A			3 of 10

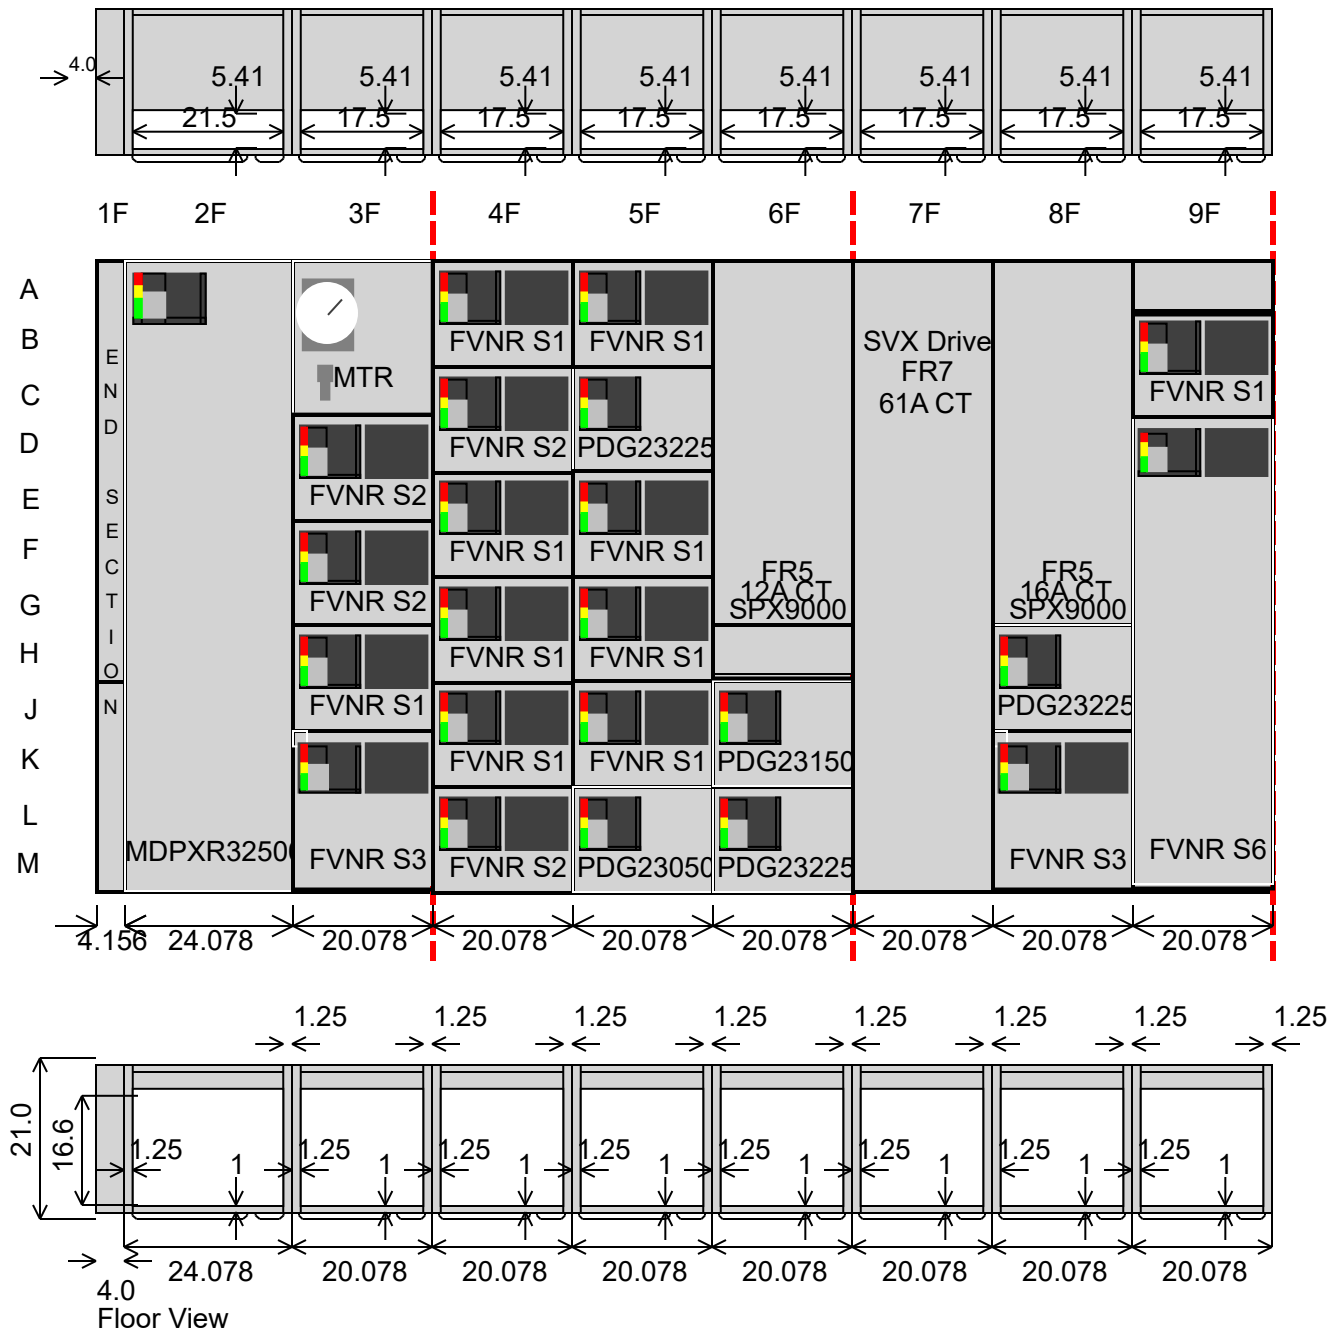

The information on this document is created by Eaton Corporation. It is disclosed in confidence and it is only to be used for the purpose in which it is supplied.

PREPARED BY
Jacob Simonsen

DATE
8/19/2026

Eaton

Fayetteville, NC

APPROVED BY

DATE

JOB NAME

Linde Phoenix AZ TSMC Phases AP21-1+ 5

DESIGNATION

480V MCC#1A 13-ES9487.1A

VERSION

1.0.3.7

TYPE

Freedom Arc Resistant MCC

DRAWING TYPE

Customer Appr.

NEG-ALT Number

RH130721X6K2-0005

REVISION

DWG SIZE




A

G.O.

ITEM

SHEET

4 of 10

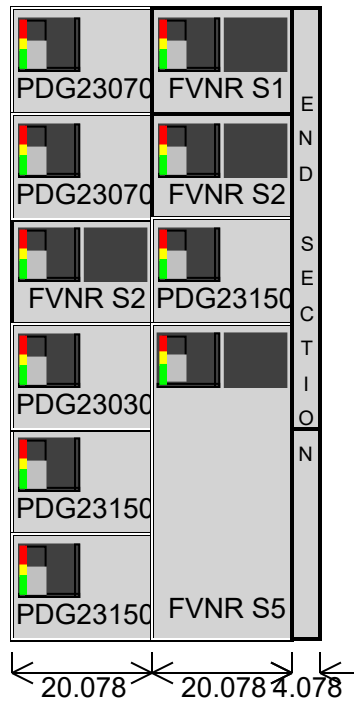

The information on this document is created by Eaton Corporation. It is disclosed in confidence and it is only to be used for the purpose in which it is supplied.

PREPARED BY Jacob Simonsen	DATE 8/19/2026	Eaton Fayetteville, NC			
APPROVED BY	DATE	JOB NAME Linde Phoenix AZ TSMC Phases AP21-1+ 5	DESIGNATION 480V MCC#1A 13-ES9487.1A		
VERSION 1.0.3.7		TYPE Freedom Arc Resistant MCC		DRAWING TYPE Customer Appr.	
NEG-ALT Number RH130721X6K2-0005	REVISION	DWG SIZE A	G.O.	ITEM	SHEET 5 of 10

Unit	Nameplate	Description	Class	Starter Size HP/FLA Wire Diag.	Bkr/Sw Poles Trip/Clip	Unit Features
2M	UNIT 100A MAIN BREAKER	MDPXR Main Bkr (2500A trip), Lugs: 5-#4-750Kcmil		Y	MDPXR 3P 2500	1 Additional 100VA CPT 1 PD PXR 25 Stand. Rating, High Inter ARMS LSIG
3C	UNIT 101A	Voltmeter and Switch		&ASU 9487 E-ZK N19-HW-NEMA		1 Additional X-Space
3E	UNIT 102A	FVNR Starter Size 2 [TM Ckt Brk]	F206	2 20 &ASU 9487 E-ZK 50 N2.2-HW-NEMA	Tm. Brk. 3P	2 Size 1-4 Starter - Normally Open 2 Size 1-4 Starter - Normally Closed 1 PD PXR 20 Stand. Rating, Stand. Inter 1 Size 2, STARTER-100VA Typical, w/extra 50VA 1 Red Run 1 Bkr Aux-1NO/1NC
3G	UNIT 103A	FVNR Starter Size 2 [TM Ckt Brk]	F206	2 20 &ASU 9487 E-ZK 50 N2.1-HW-NEMA	Tm. Brk. 3P	1 Size 1, STARTER-100VA Typical, w/extra 50VA 2 Size 1-4 Starter - Normally Open 2 Size 1-4 Starter - Normally Closed 1 PD PXR 20 Stand. Rating, Stand. Inter 1 Red Run 1 Bkr Aux-1NO/1NC
3J	UNIT 104A	FVNR Starter Size 1 [HMCP]	F206	1 1.5 &ASU 9487 E-ZK 7 N2.1-HW-NEMA	HMCP 3P	1 Size 1, STARTER-100VA Typical, w/extra 50VA 2 Size 1-4 Starter - Normally Open 2 Size 1-4 Starter - Normally Closed 1 Standard Trip 1 Breaker HMCP 1 Red Run
3M	UNIT 113A	FVNR Starter Size 3 [TM Ckt Brk]	F206	3 40 &ASU 9487 E-ZK 125 N2.2-HW-NEMA	Tm. Brk. 3P	1 Size 3, STARTER-150VA Typical, w/extra 50VA 2 Size 1-4 Starter - Normally Open 2 Size 1-4 Starter - Normally Closed 1 Bkr Aux-1NO/1NC 1 PD PXR 20 Stand. Rating, Stand. Inter 1 Red Run
4B	UNIT 105A	FVNR Starter Size 1 [TM Ckt Brk]	F206	1 2 &ASU 9487 E-ZK 15 N2.1-HW-NEMA	Tm. Brk. 3P	1 Size 1, STARTER-100VA Typical, w/extra 50VA 2 Size 1-4 Starter - Normally Open 2 Size 1-4 Starter - Normally Closed 1 Standard Trip 1 PD TH FIX STD RAT STD INT 1 Red Run
4D	UNIT 106A	FVNR Starter Size 2 [TM Ckt Brk]	F206	2 20 &ASU 9487 E-ZK 50 N2.2-HW-NEMA	Tm. Brk. 3P	2 Size 1-4 Starter - Normally Open 2 Size 1-4 Starter - Normally Closed 1 PD PXR 20 Stand. Rating, Stand. Inter 1 Size 2, STARTER-100VA Typical, w/extra 50VA 1 Red Run 1 Bkr Aux-1NO/1NC
4F	UNIT 107A	FVNR Starter Size 1 [TM Ckt Brk]	F206	1 5	Tm. Brk. 3P	1 Size 1, STARTER-100VA Typical, w/extra 50VA 2 Size 1-4 Starter - Normally Open
The information on this document is created by Eaton Corporation. It is disclosed in confidence and it is only to be used for the purpose in which it is supplied.		PREPARED BY	DATE	Eaton Fayetteville, NC		
		Jacob Simonsen	8/19/2026	JOB NAME	Linde Phoenix AZ TSMC Phases AP21-1+ 5	
		APPROVED BY	DATE	DESIGNATION	480V MCC#1A 13-ES9487.1A	
		VERSION	TYPE	DRAWING TYPE		
		1.0.3.7	Freedom Arc Resistant MCC	Customer Appr.		
NEG-ALT Number	REVISION	DWG SIZE	G.O.	ITEM	SHEET	
RH130721X6K2-0005		A			6 of 10	

Unit	Nameplate	Description	Class	Starter Size HP/FLA Wire Diag.	Bkr/Sw Poles Trip/Clip	Unit Features
				&ASU 9487 E-ZK 20 N2.1-HW-NEMA		2 Size 1-4 Starter - Normally Closed 1 Standard Trip 1 PD TH FIX STD RAT STD INT 1 Red Run
4H	UNIT 108A	FVNR Starter Size 1 [HMCP]	F206	1 1.5 &ASU 9487 E-ZK 7 N2.1-HW-NEMA	HMCP 3P	1 Size 1, STARTER-100VA Typical, w/extra 50VA 2 Size 1-4 Starter - Normally Open 2 Size 1-4 Starter - Normally Closed 1 Standard Trip 1 Breaker HMCP 1 Red Run
4K	UNIT 109A	FVNR Starter Size 1 [TM Ckt Brk]	F206	1 10 &ASU 9487 E-ZK 30 N2.1-HW-NEMA	Tm. Brk. 3P	1 Size 1, STARTER-100VA Typical, w/extra 50VA 2 Size 1-4 Starter - Normally Open 2 Size 1-4 Starter - Normally Closed 1 Standard Trip 1 PD TH FIX STD RAT STD INT 1 Red Run
4M	UNIT 110A	FVNR Starter Size 2 [TM Ckt Brk]	F206	2 20 &ASU 9487 E-ZK 50 N2.1-HW-NEMA	Tm. Brk. 3P	1 Size 1, STARTER-100VA Typical, w/extra 50VA 2 Size 1-4 Starter - Normally Open 2 Size 1-4 Starter - Normally Closed 1 PD PXR 20 Stand. Rating, Stand. Inter 1 Red Run 1 Bkr Aux-1NO/1NC
5B	UNIT 111A	FVNR Starter Size 1 [HMCP]	F206	1 1.5 &ASU 9487 E-ZK 7 N2.1-HW-NEMA	HMCP 3P	1 Size 1, STARTER-100VA Typical, w/extra 50VA 2 Size 1-4 Starter - Normally Open 2 Size 1-4 Starter - Normally Closed 1 Standard Trip 1 Breaker HMCP 1 Red Run
5D	UNIT 112A	PDG2 Bkr (225A trip)			PDG2 3P 225	1 PD PXR 20 Stand. Rating, Stand. Inter
5F	UNIT 114A	FVNR Starter Size 1 [TM Ckt Brk]	F206	1 10 &ASU 9487 E-ZK 30 N2.1-HW-NEMA	Y Tm. Brk. 3P	1 Size 1, STARTER-100VA Typical, w/extra 50VA 2 Size 1-4 Starter - Normally Open 2 Size 1-4 Starter - Normally Closed 1 Standard Trip 1 PD TH FIX STD RAT STD INT 1 Red Run
5H	UNIT 115A	FVNR Starter Size 1 [TM Ckt Brk]	F206	1 10 &ASU 9487 E-ZK 35 N2.1-HW-NEMA	Tm. Brk. 3P	1 Size 1, STARTER-100VA Typical, w/extra 50VA 2 Size 1-4 Starter - Normally Open 2 Size 1-4 Starter - Normally Closed 1 Standard Trip 1 PD TH FIX STD RAT STD INT 1 Red Run
5K	UNIT 116A	FVNR Starter Size 1	F206	1	HMCP	1 Size 1, STARTER-100VA Typical, w/extra 50VA

The information on this document is created by Eaton Corporation. It is disclosed in confidence and it is only to be used for the purpose in which it is supplied.	PREPARED BY	DATE	Eaton Fayetteville, NC		
	Jacob Simonsen	8/19/2026	JOB NAME	Linde Phoenix AZ TSMC Phases AP21-1+ 5	
	APPROVED BY	DATE	DESIGNATION	480V MCC#1A 13-ES9487.1A	
	VERSION	TYPE	DRAWING TYPE		
	1.0.3.7	Freedom Arc Resistant MCC	Customer Appr.		
NEG-ALT Number	REVISION	DWG SIZE	G.O.	ITEM	SHEET
RH130721X6K2-0005		A			7 of 10

Unit	Nameplate	Description	Class	Starter Size HP/FLA Wire Diag.	Bkr/Sw Poles Trip/Clip	Unit Features
		[HMCP]		1.5 &ASU 9487 E-ZK 7 N2.1-HW-NEMA	3P	2 Size 1-4 Starter - Normally Open 2 Size 1-4 Starter - Normally Closed 1 Standard Trip 1 Breaker HMCP 1 Red Run
5M	UNIT 122A	PDG2 Bkr (50A trip)			PDG2	1 PD PXR 20 Stand. Rating, Stand. Inter
			Y		3P 50	
6G	UNIT 117A	SPX VFD, Constant torque, 12 FLA, 480V, Tm. Brk.		7.5/12 &ASU 9487 E-ZK 25 N3.2-HW-NEMA	Tm. Brk. 3P	1 RMS 310+ LSIG Trip w/ GF 1 Blank Device Panel 1 6 DI, 1 DO, 2 AI, 1 AO, 1 +10 Vdc ref, 2 ext, +24 Vdc/EXT + 24 Vdc 1 White Power On 1 Amber Fault 1 1 Unit PB (Reset) 1 Additional 150VA CPT 3 C-H Model D15 NEMA A600, 4 Pole 1 2 RO (NC-NO) 1 SPX Upgrade 1 SVX9000 Dv/Dt Output Filter - FR5 1 Fdr Bkr 1 N.O.-1 N.C. Aux Sw. 1 SVX9000 VFD Output Contactor - FR5
6H		6" Door	Y			
6K	UNIT 123A	PDG2 Bkr (150A trip)			PDG2	1 PD PXR 20 Stand. Rating, Stand. Inter
			Y		3P 150	
6M	UNIT 124A	PDG2 Bkr (225A trip)			PDG2	1 PD PXR 20 Stand. Rating, Stand. Inter
			Y		3P 225	
7M	UNIT 118A	SPX VFD, Constant torque, 61 FLA, 480V, Tm. Brk.		40/61 &ASU 9487 E-ZK 125 N3.2-HW-NEMA	Tm. Brk. 3P	1 Standard Trip 1 Blank Device Panel 1 6 DI, 1 DO, 2 AI, 1 AO, 1 +10 Vdc ref, 2 ext, +24 Vdc/EXT + 24 Vdc 1 White Power On 1 Amber Fault 1 1 Unit PB (Reset) 1 Additional 150VA CPT 3 C-H Model D15 NEMA A600, 4 Pole 1 2 RO (NC-NO) 1 SPX Upgrade 1 SVX9000 Dv/Dt Output Filter - FR7 1 Fdr Bkr 1 N.O.-1 N.C. Aux Sw. 1 SVX9000 VFD Output Contactor - FR7
8G	UNIT 119A	SPX VFD, Constant torque, 16 FLA, 480V, Tm. Brk.		10/16 &ASU 9487 E-ZK 35 N3.2-HW-NEMA	Tm. Brk. 3P	1 Standard Trip 1 Blank Device Panel 1 6 DI, 1 DO, 2 AI, 1 AO, 1 +10 Vdc ref, 2 ext, +24 Vdc/EXT + 24 Vdc 1 White Power On 1 Amber Fault 1 1 Unit PB (Reset) 1 Additional 150VA CPT 3 C-H Model D15 NEMA A600, 4 Pole 1 2 RO (NC-NO)
The information on this document is created by Eaton Corporation. It is disclosed in confidence and it is only to be used for the purpose in which it is supplied.			PREPARED BY	DATE	Eaton Fayetteville, NC	
			Jacob Simonsen	8/19/2026		
			APPROVED BY	DATE	JOB NAME	Linde Phoenix AZ TSMC Phases AP21-1+ 5
					DESIGNATION	480V MCC#1A 13-ES9487.1A
			VERSION	TYPE	DRAWING TYPE	
			1.0.3.7	Freedom Arc Resistant MCC	Customer Appr.	
NEG-ALT Number	REVISION	DWG SIZE	G.O.	ITEM	SHEET	
RH130721X6K2-0005		A			8 of 10	

Unit	Nameplate	Description	Class	Starter Size HP/FLA Wire Diag.	Bkr/Sw Poles Trip/Clip	Unit Features
						1 SPX Upgrade 1 SVX9000 Dv/Dt Output Filter - FR5 1 Fdr Bkr 1 N.O.-1 N.C. Aux Sw. 1 SVX9000 VFD Output Contactor - FR5
8J	UNIT 125A	PDG2 Bkr (225A trip)		Y	PDG2 3P 225	1 PD PXR 20 Stand. Rating, Stand. Inter
8M	UNIT 131A	FVNR Starter Size 3 [TM Ckt Brk]	F206	3 50 &ASU 9487 E-ZK 70 N2.2-HW-NEMA	Tm. Brk. 3P	1 Size 3, STARTER-150VA Typical, w/extra 50VA 2 Size 1-4 Starter - Normally Open 2 Size 1-4 Starter - Normally Closed 1 Bkr Aux-1NO/1NC 1 PD PXR 20 Stand. Rating, Stand. Inter 1 Red Run
9A		6" Door		Y		
9C	UNIT 126A	FVNR Starter Size 1 [TM Ckt Brk]	F206	1 10 &ASU 9487 E-ZK 20 N2.1-HW-NEMA	Tm. Brk. 3P	1 Size 1, STARTER-100VA Typical, w/extra 50VA 2 Size 1-4 Starter - Normally Open 2 Size 1-4 Starter - Normally Closed 1 Standard Trip 1 PD TH FIX STD RAT STD INT 1 Red Run
9M	UNIT 121A	FVNR Starter Size 6 [TM Ckt Brk]	F206	6 300 &ASU 9487 E-ZK 600 N2.4-HW-NEMA	Tm. Brk. 3P	1 250VA Individual CPT, Fused 2 Size 5-6 Starter - Normally Open 2 Size 5-6 Starter - Normally Closed 1 PD PXR 20 Stand. Rating, Stand. Inter 1 Red Run 1 C-H Model D15 NEMA A600, 4 Pole 1 Size 6, STARTER-250VA Typical, w/extra 50VA
10B	UNIT 127A	PDG2 Bkr (70A trip)		Y	PDG2 3P 70	1 PD PXR 20 Stand. Rating, Stand. Inter
10D	UNIT 128A	PDG2 Bkr (70A trip)		Y	PDG2 3P 70	1 PD PXR 20 Stand. Rating, Stand. Inter
10F	UNIT 129A	FVNR Starter Size 2 [TM Ckt Brk]	F206	2 25 &ASU 9487 E-ZK 50 N2.2-HW-NEMA	Tm. Brk. 3P	2 Size 1-4 Starter - Normally Open 2 Size 1-4 Starter - Normally Closed 1 PD PXR 20 Stand. Rating, Stand. Inter 1 Size 2, STARTER-100VA Typical, w/extra 50VA 1 Red Run 1 Bkr Aux-1NO/1NC
10H	UNIT 130A	PDG2 Bkr (30A trip)		Y	PDG2 3P 30	1 PD PXR 20 Stand. Rating, Stand. Inter
10K	UNIT 132A	PDG2 Bkr (150A trip)		Y	PDG2	1 PD PXR 20 Stand. Rating, Stand. Inter
The information on this document is created by Eaton Corporation. It is disclosed in confidence and it is only to be used for the purpose in which it is supplied.		PREPARED BY	DATE	Eaton Fayetteville, NC		
		Jacob Simonsen	8/19/2026	JOB NAME	Linde Phoenix AZ TSMC Phases AP21-1+ 5	
		APPROVED BY	DATE	DESIGNATION	480V MCC#1A 13-ES9487.1A	
		VERSION	TYPE	DRAWING TYPE		
		1.0.3.7	Freedom Arc Resistant MCC	Customer Appr.		
NEG-ALT Number	REVISION	DWG SIZE	G.O.	ITEM	SHEET	
RH130721X6K2-0005		A			9 of 10	

Unit	Nameplate	Description	Class	Starter Size HP/FLA Wire Diag.	Bkr/Sw Poles Trip/Clip	Unit Features
10M	UNIT 133A	PDG2 Bkr (150A trip)		Y	3P 150	1 PD PXR 20 Stand. Rating, Stand. Inter
11B	SPARE	FVNR Starter Size 1 [TM Ckt Brk]	F206	1 10 &ASU 9487 E-ZK 20 N2.1-HW-NEMA	Tm. Brk. 3P	1 Size 1, STARTER-100VA Typical, w/extra 50VA 2 Size 1-4 Starter - Normally Open 2 Size 1-4 Starter - Normally Closed 1 Standard Trip 1 PD TH FIX STD RAT STD INT 1 Red Run
11D	SPARE	FVNR Starter Size 2 [TM Ckt Brk]	F206	2 25 &ASU 9487 E-ZK 50 N2.2-HW-NEMA	Tm. Brk. 3P	2 Size 1-4 Starter - Normally Open 2 Size 1-4 Starter - Normally Closed 1 PD PXR 20 Stand. Rating, Stand. Inter 1 Size 2, STARTER-100VA Typical, w/extra 50VA 1 Red Run 1 Bkr Aux-1NO/1NC
11F	SPARE	PDG2 Bkr (150A trip)			PDG2	1 PD PXR 20 Stand. Rating, Stand. Inter
11M	UNIT 120A	FVNR Starter Size 5 [TM Ckt Brk]	F206	Y 5 200 &ASU 9487 E-ZK 400 N2.4-HW-NEMA	3P 150 Tm. Brk. 3P	2 Size 5-6 Starter - Normally Open 2 Size 5-6 Starter - Normally Closed 1 PD PXR 20 Stand. Rating, Stand. Inter 1 Red Run 1 C-H Model D15 NEMA A600, 4 Pole 1 Size 5, STARTER-250VA Typical, w/extra 50VA 1 Description missing for NOCATNUM

The information on this document is created by Eaton Corporation. It is disclosed in confidence and it is only to be used for the purpose in which it is supplied.	PREPARED BY	DATE	Eaton Fayetteville, NC			
	Jacob Simonsen	8/19/2026	JOB NAME	Linde Phoenix AZ TSMC Phases AP21-1+ 5		
	APPROVED BY	DATE	DESIGNATION	480V MCC#1A 13-ES9487.1A		
	VERSION	1.0.3.7	TYPE	Freedom Arc Resistant MCC		
NEG-ALT Number	REVISION	DWG SIZE	G.O.	DRAWING TYPE	SHEET	
RH130721X6K2-0005		A		Customer Appr.	10 of 10	

NEG-ALT Number

RH130721X6K2-0005

REVISION

DWG SIZE

A

G.O.

ITEM

SHEET

10 of 10

MCC General Information

MCC General Information

Wiring Diagram Type Customer Specific
MCC Quantity 1
Standards UL845, NEMA, NEC
Special Codes UL
Service Voltage (3 Phase) 480
Frequency 60
System 3PH3W
Witness Testing No

Exertherm Continuous Thermal Monitoring No System

Structure Schedule

There are 5 structure(s).
All structures have a 600 A vertical bus.
Total width of all sections is 72"
Height of all sections is 90"

Unit Modifications

None

Enclosure Specifications

Total Structures 5
Type NEMA 1 Gasketed
Depth 21" Front Mt Only
Height 90"
Horizontal Wireways 9" High, Top & Bottom
Vertical Wireways 4"
Channel Sills No
150 Watt Space Heaters No
Master Terminal Block Location None
IBC/CBC Seismic Qualified Yes
ABS Certified No
Bottom Plates Standard
Space Heater Thermostat No

Bus System Specifications

Main Bus Amps 800
Main Bus Bar Plating Tin
Insulated Horiz. Bus Yes
1000A/sq in. Cu Bus No
Vertical Bus Amps See Structure Schedule
Vertical Bus Material Tin-Plated Copper
Bus Bracing 65
Ground Bus Location Bottom
Ground Bus Lug Size 1-#6-350Kcmil
Ground Bus Lug Type Screw
Plug-in 300A Vert. Gnd. Bus No
Neutral None
Horizontal Bus Temperature Rise 50 deg C
Bottom Vert. Bus Barrier Yes
Vertical Ground Bus No
Vertical Bus Barrier Labyrinth, Isolated/
Insulated with shutters
Ground Bus 600

Incoming Line Termination

Cable Entry Bottom
Splice Kit / Transition None
MCC Type Match Up **None**
MCC Type Match Up GO#
Device: MDPXR Main Bkr (400A trip), Lugs: 5-#4-750Kcmil

MCC Starter Specifications

Wiring Class 1B
Control Voltage 120
Control Voltage Src Ind CPT
Nameplate Size 1" X 2.5"
Nameplate Color Black / White Letters
Pilot Dev. Model 10250T
Ind. Light Type 6v Xfmr

The information on this document is created by Eaton Corporation. It is disclosed in confidence and it is only to be used for the purpose in which it is supplied.	PREPARED BY DATE Jacob Simonsen 8/19/2026	Eaton Fayetteville, NC			
	APPROVED BY DATE _____	JOB NAME Linde Phoenix AZ TSMC Phases AP21-1+ 5 DESIGNATION 480V MCC#1A 50-ES9487.1A			
	VERSION 1.0.3.7	TYPE Freedom Arc Resistant MCC	DRAWING TYPE Customer Appr.		
NEG-ALT Number RH130721X6K2-0005	REVISION 	DWG SIZE A	G.O.	ITEM	SHEET 1 of 4

Notes/Special Instructions

Master NP to read "480V MCC#1A 30-ES9487.1A"

Control wire above 150VAC to be black - add caution label to bucket doors

Direct bottom feed approved by Linde - unit 2M

MCB door bolted shut - add warning label that voltage is present - unit 2M

Breaker terminal shield - unit 3M

Breaker terminal shield - unit 3K

Breaker terminal shield - unit 3H

Breaker terminal shield - unit 3F

Breaker terminal shield - unit 3D

Breaker terminal shield - unit 4K


Breaker terminal shield - unit 4H

Breaker terminal shield - unit 4F

Breaker terminal shield - unit 4D

Breaker terminal shield - unit 4B

The information on this document is created by Eaton Corporation. It is disclosed in confidence and it is only to be used for the purpose in which it is supplied.	PREPARED BY	DATE	Eaton Fayetteville, NC		
	Jacob Simonsen	8/19/2026			
	APPROVED BY	DATE	JOB NAME	Linde Phoenix AZ TSMC Phases AP21-1+ 5	
			DESIGNATION	480V MCC#1A 50-ES9487.1A	
	VERSION		TYPE	DRAWING TYPE	
	1.0.3.7		Freedom Arc Resistant MCC	Customer Appr.	
NEG-ALT Number	REVISION	DWG SIZE	G.O.	ITEM	SHEET
RH130721X6K2-0005		A			2 of 4

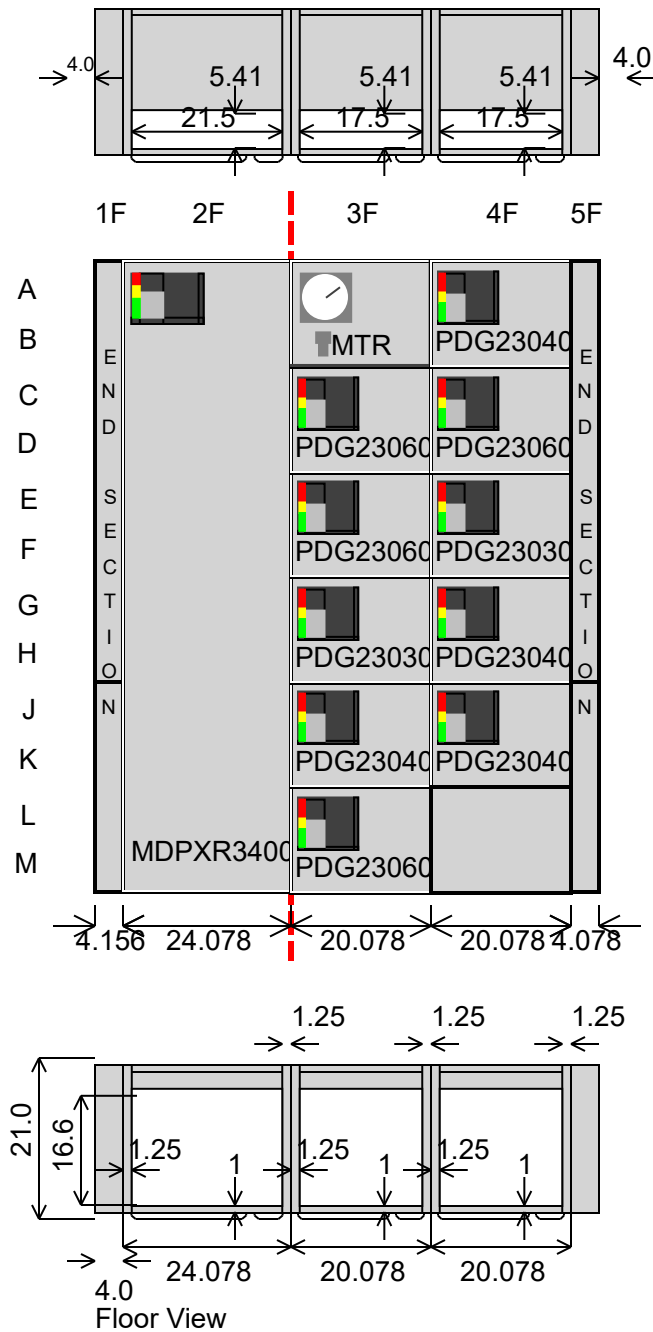

The information on this document is created by Eaton Corporation. It is disclosed in confidence and it is only to be used for the purpose in which it is supplied.

PREPARED BY		DATE	Eaton			Fayetteville, NC		
Jacob Simonsen		8/19/2026						
APPROVED BY		DATE	JOB NAME		Linde Phoenix AZ TSMC Phases AP21-1+ 5			
			DESIGNATION		480V MCC#1A 50-ES9487.1A			
VERSION			TYPE			DRAWING TYPE		
1.0.3.7			Freedom Arc Resistant MCC			Customer Appr.		
REVISION		DWG SIZE	G.O.			ITEM		SHEET
		A						3 of 4

Unit	Nameplate	Description	Class	Starter Size HP/FLA Wire Diag.	Bkr/Sw Poles Trip/Clip	Unit Features																																										
2M	UNIT 100A	MDPXR Main Bkr			MDPXR	1 PD PXR 25 Stand. Rating, High Inter ARMS LSIG																																										
	MAIN BREAKER	(400A trip), Lugs: 5-#4-750Kcmil		Y	3P 400	1 Bell Alarm Contact 1 Auxiliary Switch 2A/2B 1 Shunt Trip (Std on EO Bkrs)																																										
3B	UNIT 101A	Voltmeter and Switch		&ASU 9487 E-ZK N19-HW-NEMA																																												
3D	UNIT 102A	PDG2 Bkr (60A trip)			PDG2	1 PD PXR 20 Stand. Rating, Stand. Inter																																										
				Y	3P 60																																											
3F	UNIT 103A	PDG2 Bkr (60A trip)			PDG2	1 PD PXR 20 Stand. Rating, Stand. Inter																																										
				Y	3P 60																																											
3H	UNIT 104A	PDG2 Bkr (30A trip)			PDG2	1 PD PXR 20 Stand. Rating, Stand. Inter																																										
				Y	3P 30																																											
3K	UNIT 105A	PDG2 Bkr (40A trip)			PDG2	1 PD PXR 20 Stand. Rating, Stand. Inter																																										
				Y	3P 40																																											
3M	UNIT 106A	PDG2 Bkr (60A trip)			PDG2	1 PD PXR 20 Stand. Rating, Stand. Inter																																										
				Y	3P 60																																											
4B	UNIT 107A	PDG2 Bkr (40A trip)			PDG2	1 PD PXR 20 Stand. Rating, Stand. Inter																																										
				Y	3P 40																																											
4D	UNIT 108A	PDG2 Bkr (60A trip)			PDG2	1 PD PXR 20 Stand. Rating, Stand. Inter																																										
				Y	3P 60																																											
4F	UNIT 109A	PDG2 Bkr (30A trip)			PDG2	1 PD PXR 20 Stand. Rating, Stand. Inter																																										
				Y	3P 30																																											
4H	UNIT 110A	PDG2 Bkr (40A trip)			PDG2	1 PD PXR 20 Stand. Rating, Stand. Inter																																										
				Y	3P 40																																											
4K	UNIT 111A	PDG2 Bkr (40A trip)			PDG2	1 PD PXR 20 Stand. Rating, Stand. Inter																																										
				Y	3P 40																																											
4M		12" Door		Y																																												
The information on this document is created by Eaton Corporation. It is disclosed in confidence and it is only to be used for the purpose in which it is supplied. <table><tr><td>PREPARED BY</td><td>DATE</td><td colspan="2">Eaton</td><td colspan="2">Fayetteville, NC</td></tr><tr><td>Jacob Simonsen</td><td>8/19/2026</td><td>JOB NAME</td><td colspan="3">Linde Phoenix AZ TSMC Phases AP21-1+ 5</td></tr><tr><td>APPROVED BY</td><td>DATE</td><td>DESIGNATION</td><td colspan="3">480V MCC#1A 50-ES9487.1A</td></tr><tr><td>VERSION</td><td>TYPE</td><td colspan="2">DRAWING TYPE</td><td colspan="2"></td></tr><tr><td>1.0.3.7</td><td>Freedom Arc Resistant MCC</td><td colspan="2">Customer Appr.</td><td colspan="2"></td></tr></table> <table><tr><td>NEG-ALT Number</td><td>REVISION</td><td>DWG SIZE</td><td>G.O.</td><td>ITEM</td><td>SHEET</td></tr><tr><td>RH130721X6K2-0005</td><td></td><td>A</td><td></td><td></td><td>4 of 4</td></tr></table>							PREPARED BY	DATE	Eaton		Fayetteville, NC		Jacob Simonsen	8/19/2026	JOB NAME	Linde Phoenix AZ TSMC Phases AP21-1+ 5			APPROVED BY	DATE	DESIGNATION	480V MCC#1A 50-ES9487.1A			VERSION	TYPE	DRAWING TYPE				1.0.3.7	Freedom Arc Resistant MCC	Customer Appr.				NEG-ALT Number	REVISION	DWG SIZE	G.O.	ITEM	SHEET	RH130721X6K2-0005		A			4 of 4
PREPARED BY	DATE	Eaton		Fayetteville, NC																																												
Jacob Simonsen	8/19/2026	JOB NAME	Linde Phoenix AZ TSMC Phases AP21-1+ 5																																													
APPROVED BY	DATE	DESIGNATION	480V MCC#1A 50-ES9487.1A																																													
VERSION	TYPE	DRAWING TYPE																																														
1.0.3.7	Freedom Arc Resistant MCC	Customer Appr.																																														
NEG-ALT Number	REVISION	DWG SIZE	G.O.	ITEM	SHEET																																											
RH130721X6K2-0005		A			4 of 4																																											

MCC General Information

MCC General Information

Wiring Diagram Type Customer Specific
MCC Quantity 1
Standards UL845, NEMA, NEC
Special Codes UL
Service Voltage (3 Phase) 480
Frequency 60
System 3PH3W
Witness Testing No

PL Color (Rev/Slow) Amber
Exertherm Continuous Thermal Monitoring System No

Structure Schedule

There are 13 structure(s).
Structure(s) 5 have a 1200 A Vertical Bus.
Structure(s) 1, 10, 11, 12, 13, 2, 3, 4, 6, 7, 8, 9 have a 600 A Vertical Bus.
Total width of all sections is 232"
Height of all sections is 90"

Enclosure Specifications

Total Structures 13
Type NEMA 1 Gasketed
Depth 21" Front Mt Only
Height 90"
Horizontal Wireways 9" High, Top & Bottom
Vertical Wireways 4"
Channel Sills No
150 Watt Space Heaters No
Master Terminal Block Location None
IBC/CBC Seismic Qualified Yes
ABS Certified No
Bottom Plates Standard
Space Heater Thermostat No

Unit Modifications

#14awg, MTW Control Wire
Wiremarkers at Each End
Solid State Overload Relay (Standard C440)
Terminal Block - Latching Pull-Apart, Std.
Device Labels
Solid State Overload Relay (Standard C440)
Motor Management Relay (C445)

Bus System Specifications

Main Bus Amps 2500
Main Bus Bar Plating Tin
Insulated Horiz. Bus Yes
1000A/sq in. Cu Bus No
Vertical Bus Amps See Structure Schedule
Vertical Bus Material Tin-Plated Copper
Bus Bracing 65
Ground Bus Location Bottom
Ground Bus Lug Size 1-#6-350Kcmil
Ground Bus Lug Type Screw
Plug-in 300A Vert. Gnd. Bus No
Neutral None
Horizontal Bus Temperature Rise 50 deg C
Bottom Vert. Bus Barrier Yes
Vertical Ground Bus No
Vertical Bus Barrier Labyrinth, Isolated/
Insulated with shutters
Ground Bus 800

Incoming Line Termination

Cable Entry Bottom
Splice Kit / Transition None
MCC Type Match Up **None**
MCC Type Match Up GO#
Device: PDG6E Main Bkr (2500A trip), Lugs: 4-#500-1000Kcmil

MCC Starter Specifications

Wiring Class 1B
Control Voltage 120
Control Voltage Src Ind CPT
Nameplate Size 1" X 2.5"
Nameplate Color Black / White Letters
Pilot Dev. Model 10250T
Ind. Light Type 6v Xfmr

The information on this document is created by Eaton Corporation. It is disclosed in confidence and it is only to be used for the purpose in which it is supplied.	PREPARED BY		DATE	Eaton Fayetteville, NC		
	Jacob Simonsen		8/19/2026			
	APPROVED BY		DATE	JOB NAME Linde Phoenix AZ TSMC Phases AP21-1+ 5		
				DESIGNATION 480V MCC#1B 13-ES9487.1B		
	VERSION 1.0.3.7		TYPE Freedom Arc Resistant MCC		DRAWING TYPE Customer Appr.	
NEG-ALT Number RH130721X6K2-0005	REVISION	DWG SIZE A	G.O.	ITEM	SHEET 1 of 10	




Notes/Special Instructions

Master NP to read "480V MCC#1B 9-ES9487.1B"
 Control wire above 150VAC to be black - add caution label to bucket doors
 External ARMS light and switch - unit 2M
 Arms sel switch padlock cover - unit 2M
 Wire ARMS to TB for external indication - unit 2M
 Direct bottom feed approved by Linde - unit 2M
 MCB door bolted shut - add warning label that voltage is present - unit 2M
 Breaker terminal shield - unit 3E
 Breaker terminal shield - unit 3G
 Breaker terminal shield - unit 3J
 Breaker terminal shield - unit 3M
 Breaker terminal shield - unit 4K
 Breaker terminal shield - unit 4H
 Breaker terminal shield - unit 4F
 Breaker terminal shield - unit 4D
 Breaker terminal shield - unit 4B
 Breaker terminal shield - unit 4M
 Breaker terminal shield - unit 6B
 Breaker terminal shield - unit 6D
 Breaker terminal shield - unit 6F
 Breaker terminal shield - unit 6K
 Breaker terminal shield - unit 6H
 Breaker terminal shield - unit 6M
 Breaker terminal shield - unit 7K
 Breaker terminal shield - unit 7M
 Breaker terminal shield - unit 7G
 VFD control relay coil surge supressor - unit 7G
 Breaker terminal shield - unit 8M
 VFD control relay coil surge supressor - unit 8M
 Breaker terminal shield - unit 9M
 Breaker terminal shield - unit 9H
 VFD control relay coil surge supressor - unit 9H
 Breaker terminal shield - unit 9K
 Control wire before CPT to be black and labeled "Hot with line side bus energized" - unit 11M
 Breaker to be NGH 800AF/T - ARMS not required - unit 11M
 C445 is place holder for SEL-849 - unit 11M
 Breaker terminal shield - unit 11C
 Breaker terminal shield - unit 12K
 Breaker terminal shield - unit 12M
 Breaker terminal shield - unit 12H
 Breaker terminal shield - unit 12E
 Breaker terminal shield - unit 12C
 Breaker terminal shield - unit 5B
 Breaker terminal shield - unit 5D
 ARMS control in bucket above - unit 5M
 Control wire before CPT to be black and labeled "Hot with line side bus energized" - unit 10F
 Breaker terminal shield - unit 10F
 C445 is place holder for SEL-849 - unit 10F
 Breaker terminal shield - unit 10H

The information on this document is created by Eaton Corporation. It is disclosed in confidence and it is only to be used for the purpose in which it is supplied.	PREPARED BY Jacob Simonsen		DATE 8/19/2026	Eaton Fayetteville, NC		
	APPROVED BY		DATE	JOB NAME Linde Phoenix AZ TSMC Phases AP21-1+ 5		
				DESIGNATION 480V MCC#1B 13-ES9487.1B		
	VERSION 1.0.3.7		TYPE Freedom Arc Resistant MCC		DRAWING TYPE Customer Appr.	
NEG-ALT Number RH130721X6K2-0005	REVISION	DWG SIZE A	G.O.		ITEM	SHEET 2 of 10

Breaker terminal shield - unit 10M
Motor operators

The information on this document is created by Eaton Corporation. It is disclosed in confidence and it is only to be used for the purpose in which it is supplied.	PREPARED BY		DATE	EatonFayetteville, NC		
	Jacob Simonsen		8/19/2026			
	APPROVED BY		DATE	JOB NAME	Linde Phoenix AZ TSMC Phases AP21-1+ 5	
				DESIGNATION	480V MCC#1B 13-ES9487.1B	
	VERSION		TYPE		DRAWING TYPE	
	1.0.3.7		Freedom Arc Resistant MCC		Customer Appr.	
NEG-ALT Number	REVISION		DWG SIZE	G.O.		SHEET
RH130721X6K2-0005			A			3 of 10

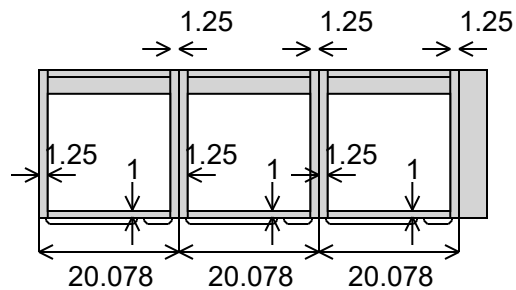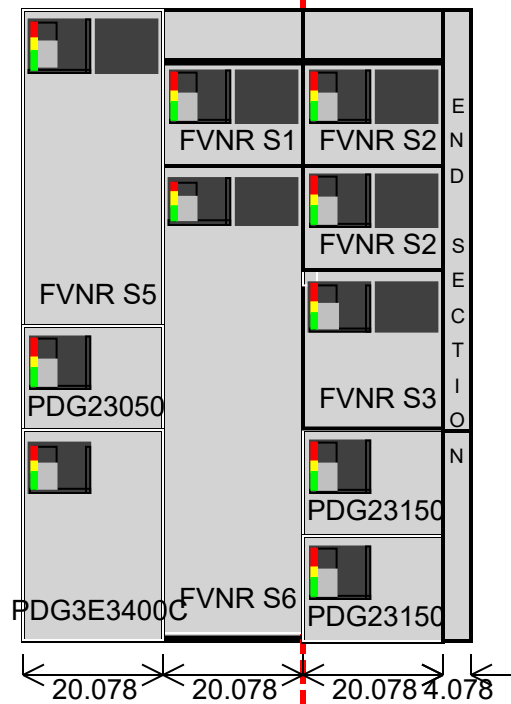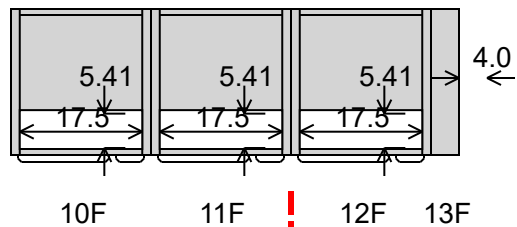

The information on this document is created by Eaton Corporation. It is disclosed in confidence and it is only to be used for the purpose in which it is supplied.

The information on this document is created by Eaton Corporation. It is disclosed in confidence and it is only to be used for the purpose in which it is supplied.	PREPARED BY Jacob Simonsen		DATE 8/19/2026	Eaton Fayetteville, NC	
	APPROVED BY		DATE	JOB NAME Linde Phoenix AZ TSMC Phases AP21-1+ 5	
	VERSION 1.0.3.7		TYPE Freedom Arc Resistant MCC	DESIGNATION 480V MCC#1B 13-ES9487.1B	
	REVISION		DWG SIZE A	DRAWING TYPE Customer Appr.	
NEG-ALT Number RH130721X6K2-0005	REVISION		G.O.	ITEM	SHEET 5 of 10

Unit	Nameplate	Description	Class	Starter Size HP/FLA Wire Diag.	Bkr/Sw Poles Trip/Clip	Unit Features
2M	UNIT 100B	PDG6E Main Bkr (2500A trip), Lugs: 4-#500-1000Kcmil			PDG6E 3P &ASU 9487 E-ZK 2500 N19-HW-NEMA	1 Additional 100VA CPT 1 PD PXR 20 Stand. Rating, Stand. Inter
3C	UNIT 101B	Voltmeter and Switch			&ASU 9487 E-ZK N19-HW-NEMA	1 Additional X-Space
3E	UNIT 102B	FVNR Starter Size 2 [TM Ckt Brk]	F206	2 20 &ASU 9487 E-ZK 50 N2.2-HW-NEMA	Tm. Brk. 3P	2 Size 1-4 Starter - Normally Open 2 Size 1-4 Starter - Normally Closed 1 PD PXR 20 Stand. Rating, Stand. Inter 1 Size 2, STARTER-100VA Typical, w/extra 50VA 1 Red Run 1 Bkr Aux-1NO/1NC
3G	UNIT 103B	FVNR Starter Size 2 [TM Ckt Brk]	F206	2 20 &ASU 9487 E-ZK 50 N2.1-HW-NEMA	Tm. Brk. 3P	1 Size 1, STARTER-100VA Typical, w/extra 50VA 2 Size 1-4 Starter - Normally Open 2 Size 1-4 Starter - Normally Closed 1 PD PXR 20 Stand. Rating, Stand. Inter 1 Red Run 1 Bkr Aux-1NO/1NC
3J	UNIT 104B	FVNR Starter Size 1 [HMCP]	F206	1 1.5 &ASU 9487 E-ZK 7 N2.1-HW-NEMA	HMCP 3P	1 Size 1, STARTER-100VA Typical, w/extra 50VA 2 Size 1-4 Starter - Normally Open 2 Size 1-4 Starter - Normally Closed 1 Standard Trip 1 Breaker HMCP 1 Red Run
3M	UNIT 113B	FVNR Starter Size 3 [TM Ckt Brk]	F206	3 40 &ASU 9487 E-ZK 125 N2.2-HW-NEMA	Tm. Brk. 3P	1 Size 3, STARTER-150VA Typical, w/extra 50VA 2 Size 1-4 Starter - Normally Open 2 Size 1-4 Starter - Normally Closed 1 Bkr Aux-1NO/1NC 1 PD PXR 20 Stand. Rating, Stand. Inter 1 Red Run
4B	UNIT 105B	FVNR Starter Size 1 [TM Ckt Brk]	F206	1 2 &ASU 9487 E-ZK 15 N2.1-HW-NEMA	Tm. Brk. 3P	1 Size 1, STARTER-100VA Typical, w/extra 50VA 2 Size 1-4 Starter - Normally Open 2 Size 1-4 Starter - Normally Closed 1 Standard Trip 1 PD TH FIX STD RAT STD INT 1 Red Run
4D	UNIT 106B	FVNR Starter Size 2 [TM Ckt Brk]	F206	2 20 &ASU 9487 E-ZK 50 N2.2-HW-NEMA	Tm. Brk. 3P	2 Size 1-4 Starter - Normally Open 2 Size 1-4 Starter - Normally Closed 1 PD PXR 20 Stand. Rating, Stand. Inter 1 Size 2, STARTER-100VA Typical, w/extra 50VA 1 Red Run 1 Bkr Aux-1NO/1NC
4F	UNIT 107B	FVNR Starter Size 2	F206	2	Tm. Brk.	1 Size 1, STARTER-100VA Typical, w/extra 50VA

The information on this document is created by Eaton Corporation. It is disclosed in confidence and it is only to be used for the purpose in which it is supplied.	PREPARED BY		DATE	Eaton Fayetteville, NC		
	Jacob Simonsen		8/19/2026			
	APPROVED BY		DATE	JOB NAME Linde Phoenix AZ TSMC Phases AP21-1+ 5		
				DESIGNATION 480V MCC#1B 13-ES9487.1B		
	VERSION 1.0.3.7		TYPE Freedom Arc Resistant MCC		DRAWING TYPE Customer Appr.	
NEG-ALT Number RH130721X6K2-0005	REVISION	DWG SIZE A	G.O.	ITEM	SHEET 6 of 10	

Unit	Nameplate	Description	Class	Starter Size HP/FLA Wire Diag.	Bkr/Sw Poles Trip/Clip	Unit Features
		[TM Ckt Brk]		20 &ASU 9487 E-ZK 50 N2.1-HW-NEMA	3P	2 Size 1-4 Starter - Normally Open 2 Size 1-4 Starter - Normally Closed 1 PD PXR 20 Stand. Rating, Stand. Inter 1 Red Run 1 Bkr Aux-1NO/1NC
4H	UNIT 108B	FVNR Starter Size 1 [HMCP]	F206	1 1.5 &ASU 9487 E-ZK 7 N2.1-HW-NEMA	HMCP 3P	1 Size 1, STARTER-100VA Typical, w/extra 50VA 2 Size 1-4 Starter - Normally Open 2 Size 1-4 Starter - Normally Closed 1 Standard Trip 1 Breaker HMCP 1 Red Run
4K	UNIT 109B	FVNR Starter Size 1 [TM Ckt Brk]	F206	1 3 &ASU 9487 E-ZK 15 N2.1-HW-NEMA	Tm. Brk. 3P	1 Size 1, STARTER-100VA Typical, w/extra 50VA 2 Size 1-4 Starter - Normally Open 2 Size 1-4 Starter - Normally Closed 1 Standard Trip 1 PD TH FIX STD RAT STD INT 1 Red Run
4M	UNIT 110B	FVNR Starter Size 2 [TM Ckt Brk]	F206	2 15 &ASU 9487 E-ZK 50 N2.2-HW-NEMA	Tm. Brk. 3P	2 Size 1-4 Starter - Normally Open 2 Size 1-4 Starter - Normally Closed 1 PD PXR 20 Stand. Rating, Stand. Inter 1 Size 2, STARTER-100VA Typical, w/extra 50VA 1 Red Run 1 Bkr Aux-1NO/1NC
5B	UNIT 111B	FVNR Starter Size 2 [TM Ckt Brk]	F206	2 20 &ASU 9487 E-ZK 50 N2.1-HW-NEMA	Tm. Brk. 3P	1 Size 1, STARTER-100VA Typical, w/extra 50VA 2 Size 1-4 Starter - Normally Open 2 Size 1-4 Starter - Normally Closed 1 PD PXR 20 Stand. Rating, Stand. Inter 1 Red Run 1 Bkr Aux-1NO/1NC
5D	UNIT 112B	FVNR Starter Size 1 [HMCP]	F206	1 1.5 &ASU 9487 E-ZK 7 N2.1-HW-NEMA	HMCP 3P	1 Size 1, STARTER-100VA Typical, w/extra 50VA 2 Size 1-4 Starter - Normally Open 2 Size 1-4 Starter - Normally Closed 1 Standard Trip 1 Breaker HMCP 1 Red Run
5E		6 in. blank relay panel		Y		
5M	UNIT 114B	PDG5E Bkr (1200A trip)		Y	PDG5E 3P 1200	1 PD PXR 20 Stand. Rating, Stand. Inter ARMS LSIG
6B	UNIT 115B	FVNR Starter Size 1 [TM Ckt Brk]	F206	1 5 &ASU 9487 E-ZK 20 N2.1-HW-NEMA	Tm. Brk. 3P	1 Size 1, STARTER-100VA Typical, w/extra 50VA 2 Size 1-4 Starter - Normally Open 2 Size 1-4 Starter - Normally Closed
The information on this document is created by Eaton Corporation. It is disclosed in confidence and it is only to be used for the purpose in which it is supplied.		PREPARED BY	DATE	Eaton Fayetteville, NC		
		Jacob Simonsen	8/19/2026	JOB NAME	Linde Phoenix AZ TSMC Phases AP21-1+ 5	
		APPROVED BY	DATE	DESIGNATION	480V MCC#1B 13-ES9487.1B	
		VERSION	TYPE	DRAWING TYPE		
		1.0.3.7	Freedom Arc Resistant MCC	Customer Appr.		
NEG-ALT Number	REVISION	DWG SIZE	G.O.	ITEM	SHEET	
RH130721X6K2-0005		A			7 of 10	

Unit	Nameplate	Description	Class	Starter Size HP/FLA Wire Diag.	Bkr/Sw Poles Trip/Clip	Unit Features
						1 Standard Trip 1 PD TH FIX STD RAT STD INT 1 Red Run
6D	UNIT 116B	FVNR Starter Size 2 [TM Ckt Brk]	F206	2 25 &ASU 9487 E-ZK 50 N2.1-HW-NEMA	Tm. Brk. 3P	1 Size 1, STARTER-100VA Typical, w/extra 50VA 2 Size 1-4 Starter - Normally Open 2 Size 1-4 Starter - Normally Closed 1 PD PXR 20 Stand. Rating, Stand. Inter 1 Red Run 1 Bkr Aux-1NO/1NC
6F	UNIT 117B	FVNR Starter Size 1 [HMCP]	F206	1 1.5 &ASU 9487 E-ZK 7 N2.1-HW-NEMA	HMCP 3P	1 Size 1, STARTER-100VA Typical, w/extra 50VA 2 Size 1-4 Starter - Normally Open 2 Size 1-4 Starter - Normally Closed 1 Standard Trip 1 Breaker HMCP 1 Red Run
6H	UNIT 121B	PDG2 Bkr (100A trip)			PDG2 3P 100	1 PD PXR 20 Stand. Rating, Stand. Inter
			Y			
6K	UNIT 122B	PDG2 Bkr (100A trip)			PDG2 3P 100	1 PD PXR 20 Stand. Rating, Stand. Inter
			Y			
6M	UNIT 126B	PDG2 Bkr (80A trip)			PDG2 3P 80	1 PD PXR 20 Stand. Rating, Stand. Inter
			Y			
7G	UNIT 118B	SPX VFD, Constant torque, 12 FLA, 480V, Tm. Brk.		7.5/12 &ASU 9487 E-ZK 25 N3.2-HW-NEMA	Tm. Brk. 3P	1 Standard Trip 1 Blank Device Panel 1 6 DI, 1 DO, 2 AI, 1 AO, 1 +10 Vdc ref, 2 ext, +24 Vdc/EXT + 24 Vdc 1 White Power On 1 Amber Fault 1 1 Unit PB (Reset) 1 Additional 150VA CPT 3 C-H Model D15 NEMA A600, 4 Pole 1 2 RO (NC-NO) 1 SPX Upgrade 1 SVX9000 Dv/Dt Output Filter - FR5 1 SVX9000 VFD Output Contactor - FR5 1 Fdr Bkr 1 N.O.-1 N.C. Aux Sw.
7H		6" Door				
			Y			
7K	UNIT 128B	PDG2 Bkr (80A trip)			PDG2 3P 80	1 PD PXR 20 Stand. Rating, Stand. Inter
			Y			
7M	UNIT 129B	PDG2 Bkr (30A trip)			PDG2 3P 30	1 PD PXR 20 Stand. Rating, Stand. Inter
			Y			
8M	UNIT 119B	SPX VFD, Constant torque, 61 FLA, 480V, Tm. Brk.		40/61 &ASU 9487 E-ZK 125	Tm. Brk. 3P	1 Standard Trip 1 Blank Device Panel 1 6 DI, 1 DO, 2 AI, 1 AO, 1 +10 Vdc
The information on this document is created by Eaton Corporation. It is disclosed in confidence and it is only to be used for the purpose in which it is supplied.			PREPARED BY	DATE	Eaton Fayetteville, NC	
			Jacob Simonsen	8/19/2026		
			APPROVED BY	DATE	JOB NAME	Linde Phoenix AZ TSMC Phases AP21-1+ 5
					DESIGNATION	480V MCC#1B 13-ES9487.1B
			VERSION	TYPE	DRAWING TYPE	
			1.0.3.7	Freedom Arc Resistant MCC	Customer Appr.	
NEG-ALT Number	REVISION	DWG SIZE	G.O.	ITEM	SHEET	
RH130721X6K2-0005		A			8 of 10	

Unit	Nameplate	Description	Class	Starter Size HP/FLA Wire Diag.	Bkr/Sw Poles Trip/Clip	Unit Features
				N3.2-HW-NEMA		ref, 2 ext, +24 Vdc/EXT + 24 Vdc 1 White Power On 1 Amber Fault 1 1 Unit PB (Reset) 1 Additional 150VA CPT 3 C-H Model D15 NEMA A600, 4 Pole 1 2 RO (NC-NO) 1 SPX Upgrade 1 SVX9000 Dv/Dt Output Filter - FR7 1 SVX9000 VFD Output Contactor - FR7 1 Fdr Bkr 1 N.O.-1 N.C. Aux Sw.
9A		6" Door		Y		
9H	UNIT 120B	SPX VFD, Constant torque, 16 FLA, 480V, Tm. Brk.		10/16 &ASU 9487 E-ZK 35 N3.2-HW-NEMA	Tm. Brk. 3P	1 Standard Trip 1 Blank Device Panel 1 6 DI, 1 DO, 2 AI, 1 AO, 1 +10 Vdc ref, 2 ext, +24 Vdc/EXT + 24 Vdc 1 White Power On 1 Amber Fault 1 1 Unit PB (Reset) 1 Additional 150VA CPT 3 C-H Model D15 NEMA A600, 4 Pole 1 2 RO (NC-NO) 1 SPX Upgrade 1 SVX9000 Dv/Dt Output Filter - FR5 1 SVX9000 VFD Output Contactor - FR5 1 Fdr Bkr 1 N.O.-1 N.C. Aux Sw.
9K	UNIT 131B	PDG2 Bkr (70A trip)			PDG2 3P 70	1 PD PXR 20 Stand. Rating, Stand. Inter
9M	UNIT 132B	FVNR Starter Size 1 [TM Ckt Brk]	F206	1 10 &ASU 9487 E-ZK 20 N2.1-HW-NEMA	Tm. Brk. 3P	1 Size 1, STARTER-100VA Typical, w/extra 50VA 2 Size 1-4 Starter - Normally Open 2 Size 1-4 Starter - Normally Closed 1 Standard Trip 1 PD TH FIX STD RAT STD INT 1 Red Run
10F	UNIT 123B	FVNR Starter Size 5 [TM Ckt Brk]	F206	5 200 &ASU 9487 E-ZK 400 N2.4-HW-NEMA	Tm. Brk. 3P	2 Size 5-6 Starter - Normally Open 2 Size 5-6 Starter - Normally Closed 1 PD PXR 20 Stand. Rating, Stand. Inter 1 Red Run 1 C-H Model D15 NEMA A600, 4 Pole 1 Size 5, STARTER-250VA Typical, w/extra 50VA 1 Description missing for NOCATNUM
10H	UNIT 127B	PDG2 Bkr (50A trip)		Y	PDG2 3P 50	1 PD PXR 20 Stand. Rating, Stand. Inter
10M	UNIT 130B	PDG3ECompact Bkr (400A trip)		Y	PDG3E 3P 400	1 PD PXR 20 Stand. Rating, Stand. Inter
11A		6" Door				

The information on this document is created by Eaton Corporation. It is disclosed in confidence and it is only to be used for the purpose in which it is supplied.	PREPARED BY	DATE	Eaton Fayetteville, NC		
	Jacob Simonsen	8/19/2026	JOB NAME	Linde Phoenix AZ TSMC Phases AP21-1+ 5	
	APPROVED BY	DATE	DESIGNATION	480V MCC#1B 13-ES9487.1B	
	VERSION	TYPE	DRAWING TYPE		
	1.0.3.7	Freedom Arc Resistant MCC	Customer Appr.		
NEG-ALT Number	REVISION	DWG SIZE	G.O.	ITEM	SHEET
RH130721X6K2-0005		A			9 of 10

Unit	Nameplate	Description	Class	Starter Size HP/FLA Wire Diag.	Bkr/Sw Poles Trip/Clip	Unit Features
11C	UNIT 133B	FVNR Starter Size 1 [TM Ckt Brk]	F206	1 10 &ASU 9487 E-ZK 20 N2.1-HW-NEMA	Tm. Brk. 3P	1 Size 1, STARTER-100VA Typical, w/extra 50VA 2 Size 1-4 Starter - Normally Open 2 Size 1-4 Starter - Normally Closed 1 Standard Trip 1 PD TH FIX STD RAT STD INT 1 Red Run
11M	UNIT 125B	FVNR Starter Size 6 [TM Ckt Brk]	F206	6 300 &ASU 9487 E-ZK 600 N2.4-HW-NEMA	Tm. Brk. 3P	1 250VA Individual CPT, Fused 2 Size 5-6 Starter - Normally Open 2 Size 5-6 Starter - Normally Closed 1 PD PXR 20 Stand. Rating, Stand. Inter 1 Red Run 1 C-H Model D15 NEMA A600, 4 Pole 1 Size 6, STARTER-250VA Typical, w/extra 50VA
12A		6" Door		Y		
12C	UNIT 134B	FVNR Starter Size 2 [TM Ckt Brk]	F206	2 25 &ASU 9487 E-ZK 50 N2.2-HW-NEMA	Tm. Brk. 3P	2 Size 1-4 Starter - Normally Open 2 Size 1-4 Starter - Normally Closed 1 PD PXR 20 Stand. Rating, Stand. Inter 1 Size 2, STARTER-100VA Typical, w/extra 50VA 1 Red Run 1 Bkr Aux-1NO/1NC
12E	UNIT 135B	FVNR Starter Size 2 [TM Ckt Brk]	F206	2 25 &ASU 9487 E-ZK 50 N2.2-HW-NEMA	Tm. Brk. 3P	2 Size 1-4 Starter - Normally Open 2 Size 1-4 Starter - Normally Closed 1 PD PXR 20 Stand. Rating, Stand. Inter 1 Size 2, STARTER-100VA Typical, w/extra 50VA 1 Red Run 1 Bkr Aux-1NO/1NC
12H	UNIT 136B	FVNR Starter Size 3 [TM Ckt Brk]	F206	3 50 &ASU 9487 E-ZK 70 N2.2-HW-NEMA	Tm. Brk. 3P	1 Size 3, STARTER-150VA Typical, w/extra 50VA 2 Size 1-4 Starter - Normally Open 2 Size 1-4 Starter - Normally Closed 1 Bkr Aux-1NO/1NC 1 PD PXR 20 Stand. Rating, Stand. Inter 1 Red Run
12K	UNIT 137B	PDG2 Bkr (150A trip)			PDG2 3P 150	1 PD PXR 20 Stand. Rating, Stand. Inter
12M	UNIT 138B	PDG2 Bkr (150A trip)		Y Y	PDG2 3P 150	1 PD PXR 20 Stand. Rating, Stand. Inter

The information on this document is created by Eaton Corporation. It is disclosed in confidence and it is only to be used for the purpose in which it is supplied.	PREPARED BY	DATE	Eaton Fayetteville, NC		
	Jacob Simonsen	8/19/2026			
	APPROVED BY	DATE	JOB NAME Linde Phoenix AZ TSMC Phases AP21-1+ 5 DESIGNATION 480V MCC#1B 13-ES9487.1B		
	VERSION	TYPE	DRAWING TYPE		
	1.0.3.7	Freedom Arc Resistant MCC	Customer Appr.		
NEG-ALT Number	REVISION	DWG SIZE	G.O.	ITEM	SHEET
RH130721X6K2-0005		A			10 of 10

MCC General Information

MCC General Information

Wiring Diagram Type Customer Specific
MCC Quantity 1
Standards UL845, NEMA, NEC
Special Codes UL
Service Voltage (3 Phase) 480
Frequency 60
System 3PH3W
Witness Testing No

Exertherm Continuous Thermal Monitoring No System

Structure Schedule

There are 5 structure(s).
All structures have a 600 A vertical bus.
Total width of all sections is 72"
Height of all sections is 90"

Unit Modifications

None

Enclosure Specifications

Total Structures 5
Type NEMA 1 Gasketed
Depth 21" Front Mt Only
Height 90"
Horizontal Wireways 9" High, Top & Bottom
Vertical Wireways 4"
Channel Sills No
150 Watt Space Heaters No
Master Terminal Block Location None
IBC/CBC Seismic Qualified Yes
ABS Certified No
Bottom Plates Standard
Space Heater Thermostat No

Bus System Specifications

Main Bus Amps 800
Main Bus Bar Plating Tin
Insulated Horiz. Bus Yes
1000A/sq in. Cu Bus No
Vertical Bus Amps See Structure Schedule
Vertical Bus Material Tin-Plated Copper
Bus Bracing 65
Ground Bus Location Bottom
Ground Bus Lug Size 1-#6-350Kcmil
Ground Bus Lug Type Screw
Plug-in 300A Vert. Gnd. Bus No
Neutral None
Horizontal Bus Temperature Rise 50 deg C
Bottom Vert. Bus Barrier Yes
Vertical Ground Bus No
Vertical Bus Barrier Labyrinth, Isolated/
Insulated with shutters
Ground Bus 600

Incoming Line Termination

Cable Entry Bottom
Splice Kit / Transition None
MCC Type Match Up **None**
MCC Type Match Up GO#
Device: MDPXR Main Bkr (400A trip), Lugs: 5-#4-750Kcmil

MCC Starter Specifications

Wiring Class 1B
Control Voltage 120
Control Voltage Src Ind CPT
Nameplate Size 1" X 2.5"
Nameplate Color Black / White Letters
Pilot Dev. Model 10250T
Ind. Light Type 6v Xfmr

The information on this document is created by Eaton Corporation. It is disclosed in confidence and it is only to be used for the purpose in which it is supplied.	PREPARED BY DATE Jacob Simonsen 8/19/2026	Eaton Fayetteville, NC			
	APPROVED BY DATE _____	JOB NAME Linde Phoenix AZ TSMC Phases AP21-1+ 5 DESIGNATION 480V MCC#1B 50-ES9487.1B			
	VERSION 1.0.3.7	TYPE Freedom Arc Resistant MCC	DRAWING TYPE Customer Appr.		
NEG-ALT Number RH130721X6K2-0005	REVISION 	DWG SIZE A	G.O.	ITEM	SHEET 1 of 4

Notes/Special Instructions

Master NP to read "480V MCC#1B 30-ES9487.1B"

Control wire above 150VAC to be black - add caution label to bucket doors

Direct bottom feed approved by Linde - unit 2M

MCB door bolted shut - add warning label that voltage is present - unit 2M

Breaker terminal shield - unit 3M

Breaker terminal shield - unit 3K

Breaker terminal shield - unit 3H

Breaker terminal shield - unit 3F

Breaker terminal shield - unit 3D

Breaker terminal shield - unit 4K

Breaker terminal shield - unit 4H

Breaker terminal shield - unit 4F

Breaker terminal shield - unit 4D

Breaker terminal shield - unit 4B

Breaker terminal shield - unit 4M

The information on this document is created by Eaton Corporation. It is disclosed in confidence and it is only to be used for the purpose in which it is supplied.	PREPARED BY	DATE	Eaton			Fayetteville, NC	
	Jacob Simonsen	8/19/2026	JOB NAME	Linde Phoenix AZ TSMC Phases AP21-1+ 5			
	APPROVED BY	DATE	DESIGNATION	480V MCC#1B 50-ES9487.1B			
	VERSION	TYPE	DRAWING TYPE				
	1.0.3.7	Freedom Arc Resistant MCC	Customer Appr.				
NEG-ALT Number	REVISION	DWG SIZE	G.O.	ITEM	SHEET		
RH130721X6K2-0005		A			2 of 4		



The information on this document is created by Eaton Corporation. It is disclosed in confidence and it is only to be used for the purpose in which it is supplied.	PREPARED BY Jacob Simonsen		DATE 8/19/2026	Eaton			Fayetteville, NC		
	APPROVED BY		DATE	JOB NAME Linde Phoenix AZ TSMC Phases AP21-1+ 5		DESIGNATION 480V MCC#1B 50-ES9487.1B			
	VERSION 1.0.3.7			TYPE Freedom Arc Resistant MCC			DRAWING TYPE Customer Appr.		
	NEG-ALT Number RH130721X6K2-0005		REVISION	DWG SIZE A	G.O.		ITEM	SHEET 3 of 4	

Unit	Nameplate	Description	Class	Starter Size HP/FLA Wire Diag.	Bkr/Sw Poles Trip/Clip	Unit Features
2M	UNIT 100B	MDPXR Main Bkr			MDPXR	1 PD PXR 25 Stand. Rating, High Inter ARMS LSI
	MAIN BREAKER	(400A trip), Lugs: 5-#4-750Kcmil		Y	3P 400	1 Bell Alarm Contact 1 Auxiliary Switch 2A/2B 1 Shunt Trip (Std on EO Bkrs)
3B	UNIT 101B	Voltmeter and Switch		&ASU 9487 E-ZK N19-HW-NEMA		
3D	UNIT 102B	PDG2 Bkr (60A trip)			PDG2	1 PD PXR 20 Stand. Rating, Stand. Inter
				Y	3P 60	
3F	UNIT 103B	PDG2 Bkr (30A trip)			PDG2	1 PD PXR 20 Stand. Rating, Stand. Inter
				Y	3P 30	
3H	UNIT 104B	PDG2 Bkr (40A trip)			PDG2	1 PD PXR 20 Stand. Rating, Stand. Inter
				Y	3P 40	
3K	UNIT 105B	PDG2 Bkr (60A trip)			PDG2	1 PD PXR 20 Stand. Rating, Stand. Inter
				Y	3P 60	
3M	UNIT 106B	PDG2 Bkr (60A trip)			PDG2	1 PD PXR 20 Stand. Rating, Stand. Inter
				Y	3P 60	
4B	UNIT 107B	PDG2 Bkr (30A trip)			PDG2	1 PD PXR 20 Stand. Rating, Stand. Inter
				Y	3P 30	
4D	UNIT 108B	PDG2 Bkr (40A trip)			PDG2	1 PD PXR 20 Stand. Rating, Stand. Inter
				Y	3P 40	
4F	UNIT 109B	PDG2 Bkr (60A trip)			PDG2	1 PD PXR 20 Stand. Rating, Stand. Inter
				Y	3P 60	
4H	UNIT 110B	PDG2 Bkr (30A trip)			PDG2	1 PD PXR 20 Stand. Rating, Stand. Inter
				Y	3P 30	
4K	UNIT 111B	PDG2 Bkr (40A trip)			PDG2	1 PD PXR 20 Stand. Rating, Stand. Inter
				Y	3P 40	
4M	UNIT 112B	PDG2 Bkr (40A trip)			PDG2	1 PD PXR 20 Stand. Rating, Stand. Inter
				Y	3P 40	

The information on this document is created by Eaton Corporation. It is disclosed in confidence and it is only to be used for the purpose in which it is supplied.	PREPARED BY	DATE	EatonFayetteville, NC		
	Jacob Simonsen	8/19/2026			
	APPROVED BY	DATE	JOB NAMELinde Phoenix AZ TSMC Phases AP21-1+ 5		
			DESIGNATION480V MCC#1B 50-ES9487.1B		
	VERSION		TYPE		DRAWING TYPE
	1.0.3.7		Freedom Arc Resistant MCC		Customer Appr.
NEG-ALT Number	REVISION	DWG SIZE	G.O.	ITEM	SHEET
RH130721X6K2-0005		A			4 of 4

MCC General Information

MCC General Information

Wiring Diagram Type Customer Specific
MCC Quantity 1
Standards UL845, NEMA, NEC
Special Codes UL
Service Voltage (3 Phase) 480
Frequency 60
System 3PH3W
Witness Testing No

PL Color (Rev/Slow) Amber
Exertherm Continuous Thermal Monitoring System No

Structure Schedule

There are 24 structure(s).
Structure(s) 7 have a 1200 A Vertical Bus.
Structure(s) 1, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 2, 20, 21, 22, 23, 24, 3, 4, 5, 6, 8, 9 have a 600 A Vertical Bus.
Total width of all sections is 464"
Height of all sections is 90"

Enclosure Specifications

Total Structures 24
Type NEMA 1 Gasketed
Depth 21" Front Mt Only
Height 90"
Horizontal Wireways 9" High, Top & Bottom
Vertical Wireways 4"
Channel Sills No
150 Watt Space Heaters No
Master Terminal Block Location None
IBC/CBC Seismic Qualified No
ABS Certified No
Bottom Plates Standard
Space Heater Thermostat No

Unit Modifications

Device Labels
#14awg, MTW Control Wire
Wiremarkers at Each End
Solid State Overload Relay (Standard C440)
Terminal Block - Latching Pull-Apart, Std.
Motor Management Relay (C445)

Bus System Specifications

Main Bus Amps 2500
Main Bus Bar Plating Tin
Insulated Horiz. Bus Yes
1000A/sq in. Cu Bus No
Vertical Bus Amps See Structure Schedule
Vertical Bus Material Tin-Plated Copper
Bus Bracing 65
Ground Bus Location Bottom
Ground Bus Lug Size 1-#6-350Kcmil
Ground Bus Lug Type Screw
Plug-in 300A Vert. Gnd. Bus No
Neutral None
Horizontal Bus Temperature Rise 50 deg C
Bottom Vert. Bus Barrier Yes
Vertical Ground Bus No
Vertical Bus Barrier Labyrinth, Isolated/
Insulated with shutters
Ground Bus 800

Incoming Line Termination

Cable Entry Bottom
Splice Kit / Transition None
MCC Type Match Up **None**
MCC Type Match Up GO#
Device: MDPXR Main 1 Bkr (2500A trip), Lugs: 5-#4-750Kcmil

MCC Starter Specifications

Wiring Class 1B
Control Voltage 120
Control Voltage Src Ind CPT
Nameplate Size 1" X 2.5"
Nameplate Color Black / White Letters
Pilot Dev. Model 10250T
Ind. Light Type 6v Xfmr

The information on this document is created by Eaton Corporation. It is disclosed in confidence and it is only to be used for the purpose in which it is supplied.	PREPARED BY DATE Jacob Simonsen 8/19/2026	Eaton Fayetteville, NC			
	APPROVED BY DATE _____	JOB NAME Linde Phoenix AZ TSMC Phases AP21-1+ 5 DESIGNATION 480V MCC#2 15-ES9487.2			
	VERSION 1.0.3.7	TYPE Freedom Arc Resistant MCC	DRAWING TYPE Customer Appr.		
NEG-ALT Number RH130721X6K2-0005	REVISION 	DWG SIZE A	G.O.	ITEM	SHEET 1 of 14

Notes/Special Instructions

Breaker control switch - unit 2M
 External Arms light and switch - unit 2M
 Padlock cover for ARMs selector switch - unit 2M
 Breaker to have 6a/6b MOC contacts - unit 2M
 Breaker to have 4 Form-C cell switch contacts - unit 2M
 Breaker to have 2 Form-C OTS contacts - unit 2M
 Shunt trip, motor operator and spring release all 120VAC - unit 2M
 PTs to ATS - unit 3E
 PTs connected to line said of main breakers - unit 3E
 Breaker terminal shield - unit 3G
 Control power to ATS main breakers - unit 3G
 CPT connected to line side of main breakers - unit 3G
 Breaker terminal shield - unit 6B
 Breaker terminal shield - unit 6D
 Breaker terminal shield - unit 6F
 Breaker terminal shield - unit 6H
 Breaker terminal shield - unit 6K
 Breaker terminal shield - unit 6M
 Breaker terminal shield - unit 7C
 Breaker terminal shield - unit 7E
 Breaker terminal shield - unit 9M
 VFD control relay coil surge supressor - unit 9M
 Add electrical interlock between 8M and 15M - unit 9M
 Add electrical interlock between 9M and 16M - unit 9M
 Control wire before CPT to be black and labeled "Hot with line side bus energized" - unit 11M
 Breaker to be NGH 800AF/T - ARMS not required - unit 11M
 C445 is place holder for SEL-849 - unit 11M
 Add electrical interlock between 11M and 18M - unit 11M
 Breaker terminal shield - unit 8M
 VFD control relay coil surge supressor - unit 8M
 Add electrical interlock between 8M and 15M - unit 8M
 Add electrical interlock between 9M and 16M - unit 8M
 Breaker terminal shield - unit 12M
 Breaker terminal shield - unit 12K
 Breaker terminal shield - unit 12G
 Breaker control switch - unit 13M
 External Arms light and switch - unit 13M
 Padlock cover for ARMs selector switch - unit 13M
 Breaker to have 6a/6b MOC contacts - unit 13M
 Breaker to have 4 Form-C cell switch contacts - unit 13M
 Breaker to have 2 Form-C OTS contacts - unit 13M
 Shunt trip, motor operator and spring release all 120VAC - unit 13M
 Breaker terminal shield - unit 14B
 Breaker terminal shield - unit 14D
 Breaker terminal shield - unit 14F
 Breaker terminal shield - unit 14H
 Breaker terminal shield - unit 14K
 Breaker terminal shield - unit 14M
 Breaker terminal shield - unit 15M

The information on this document is created by Eaton Corporation. It is disclosed in confidence and it is only to be used for the purpose in which it is supplied.	PREPARED BY Jacob Simonsen		DATE 8/19/2026	Eaton Fayetteville, NC		
	APPROVED BY		DATE	JOB NAME Linde Phoenix AZ TSMC Phases AP21-1+ 5		
				DESIGNATION 480V MCC#2 15-ES9487.2		
	VERSION 1.0.3.7		TYPE Freedom Arc Resistant MCC		DRAWING TYPE Customer Appr.	
NEG-ALT Number RH130721X6K2-0005	REVISION	DWG SIZE A	G.O.		ITEM	SHEET 2 of 14


VFD control relay coil surge supressor - unit 15M
 Add electrical interlock between 8M and 15M - unit 15M
 Add electrical interlock between 9M and 16M - unit 15M
 Breaker terminal shield - unit 16M
 VFD control relay coil surge supressor - unit 16M
 Add electrical interlock between 8M and 15M - unit 16M
 Add electrical interlock between 9M and 16M - unit 16M
 Control wire before CPT to be black and labeled "Hot with line side bus energized" - unit 17F
 Breaker terminal shield - unit 17F
 C445 is place holder for SEL-849 - unit 17F
 Add electrical interlock between 10F and 17F - unit 17F
 Breaker terminal shield - unit 17H
 Breaker terminal shield - unit 17K
 Breaker terminal shield - unit 17M
 Control wire before CPT to be black and labeled "Hot with line side bus energized" - unit 18M
 Breaker to be NGH 800AF/T - ARMS not required - unit 18M
 C445 is place holder for SEL-849 - unit 18M
 Add electrical interlock between 11M and 18M - unit 18M
 Breaker terminal shield - unit 18C
 Breaker terminal shield - unit 19B
 Breaker terminal shield - unit 19D
 Breaker terminal shield - unit 19F
 Breaker terminal shield - unit 19H
 Breaker terminal shield - unit 19K
 Breaker terminal shield - unit 19M
 Breaker terminal shield - unit 20M
 Breaker terminal shield - unit 20K
 Breaker terminal shield - unit 20G
 Breaker control switch - unit 21M
 External ARMs light and switch - unit 21M
 Padlock cover for ARMs selector switch - unit 21M
 Breaker to have 6a/6b MOC contacts - unit 21M
 Breaker to have 4 Form-C cell switch contacts - unit 21M
 Breaker to have 2 Form-C OTS contacts - unit 21M
 Shunt trip, motor operator and spring release all 120VAC - unit 21M
 Breaker terminal shield - unit 22G
 Control power to ATS main breakers - unit 22G
 CPT connected to line side of main breakers - unit 22G
 Breaker control switch - unit 23M
 External Arms light and switch - unit 23M
 Padlock cover for ARMs selector switch - unit 23M
 Breaker to have 6a/6b MOC contacts - unit 23M
 Breaker to have 4 Form-C cell switch contacts - unit 23M
 Breaker to have 2 Form-C OTS contacts - unit 23M
 Shunt trip, motor operator and spring release all 120VAC - unit 23M
 Master NP to read "480V MCC#2 11-ES9487.2"
 Control wire above 150VAC to be black - add caution label to bucket doors
 Include Magnum breaker lifting yoke to work with lift truck
 PSC Provided Main-Tie-Main-Gen transfer scheme
 Control wire before CPT to be black and labeled "Hot with line side bus energized" - unit 10F
 Breaker terminal shield - unit 10F

The information on this document is created by Eaton Corporation. It is disclosed in confidence and it is only to be used for the purpose in which it is supplied.	PREPARED BY Jacob Simonsen		DATE 8/19/2026	Eaton Fayetteville, NC	
	APPROVED BY		DATE	JOB NAME Linde Phoenix AZ TSMC Phases AP21-1+ 5	
	VERSION 1.0.3.7		TYPE Freedom Arc Resistant MCC	DESIGNATION 480V MCC#2 15-ES9487.2 DRAWING TYPE Customer Appr.	
NEG-ALT Number RH130721X6K2-0005	REVISION	DWG SIZE A	G.O.	ITEM	SHEET 3 of 14




C445 is place holder for SEL-849 - unit 10F
Add electrical interlock between 10F and 17F - unit 10F
Breaker terminal shield - unit 10H
Breaker terminal shield - unit 10K
Breaker terminal shield - unit 10M
Motor operators

The information on this document is created by Eaton Corporation. It is disclosed in confidence and it is only to be used for the purpose in which it is supplied.


The information on this document is created by Eaton Corporation. It is disclosed in confidence and it is only to be used for the purpose in which it is supplied.	PREPARED BY	DATE	Eaton Fayetteville, NC		
	Jacob Simonsen	8/19/2026			
	APPROVED BY	DATE	JOB NAME	Linde Phoenix AZ TSMC Phases AP21-1+ 5	
			DESIGNATION	480V MCC#2 15-ES9487.2	
	VERSION		TYPE	DRAWING TYPE	
	1.0.3.7		Freedom Arc Resistant MCC	Customer Appr.	
NEG-ALT Number	REVISION	DWG SIZE	G.O.	ITEM	SHEET
RH130721X6K2-0005		A			4 of 14

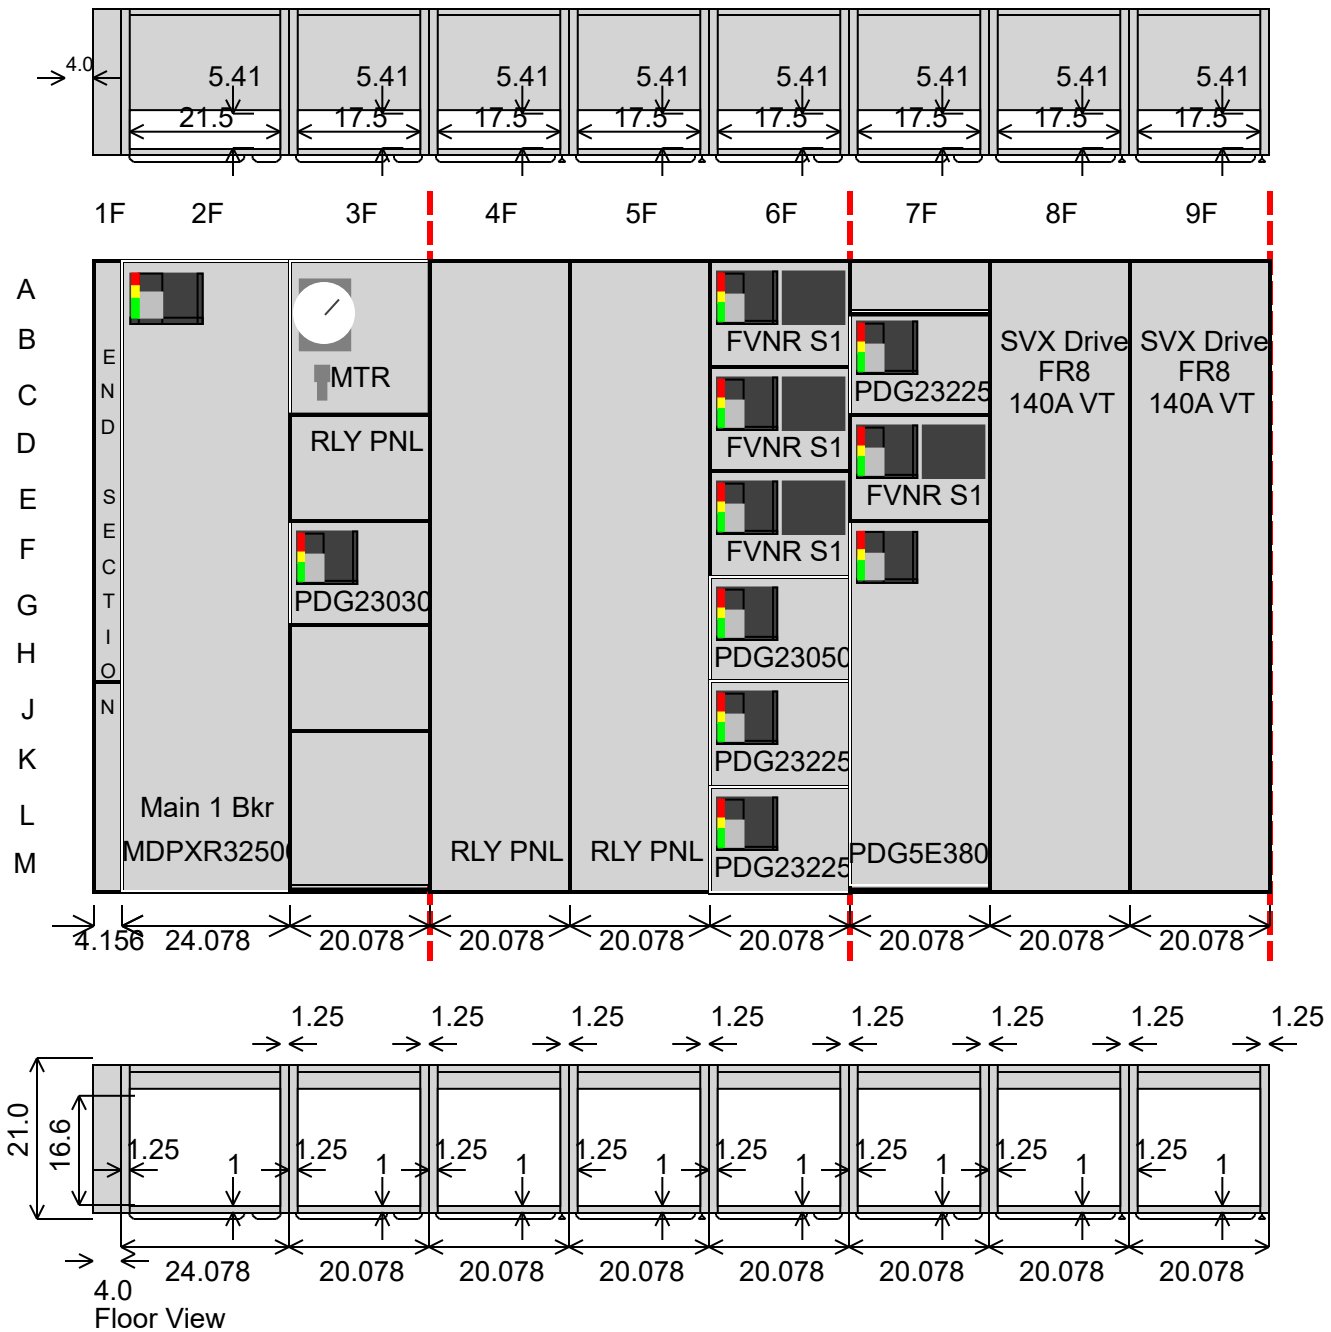

The information on this document is created by Eaton Corporation. It is disclosed in confidence and it is only to be used for the purpose in which it is supplied.	PREPARED BY		DATE	Eaton Fayetteville, NC		
	Jacob Simonsen		8/19/2026			
	APPROVED BY		DATE	JOB NAME Linde Phoenix AZ TSMC Phases AP21-1+ 5		
				DESIGNATION 480V MCC#2 15-ES9487.2		
NEG-ALT Number	VERSION		TYPE		DRAWING TYPE	
	1.0.3.7		Freedom Arc Resistant MCC		Customer Appr.	
RH130721X6K2-0005	REVISION	DWG SIZE		G.O.	ITEM	SHEET
		A				5 of 14

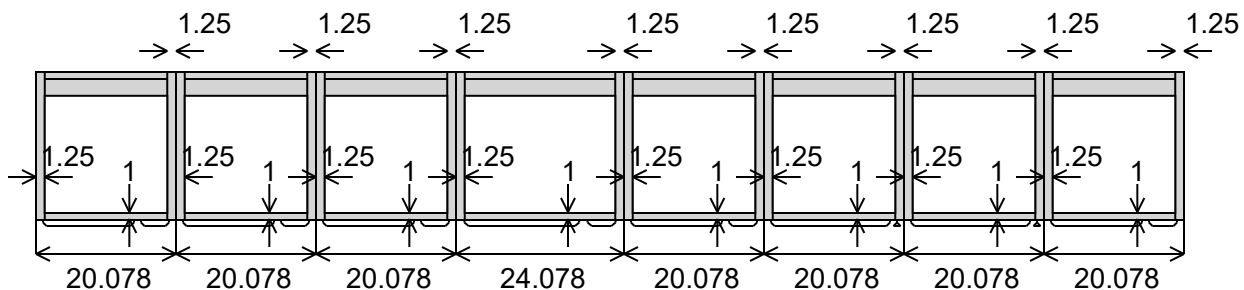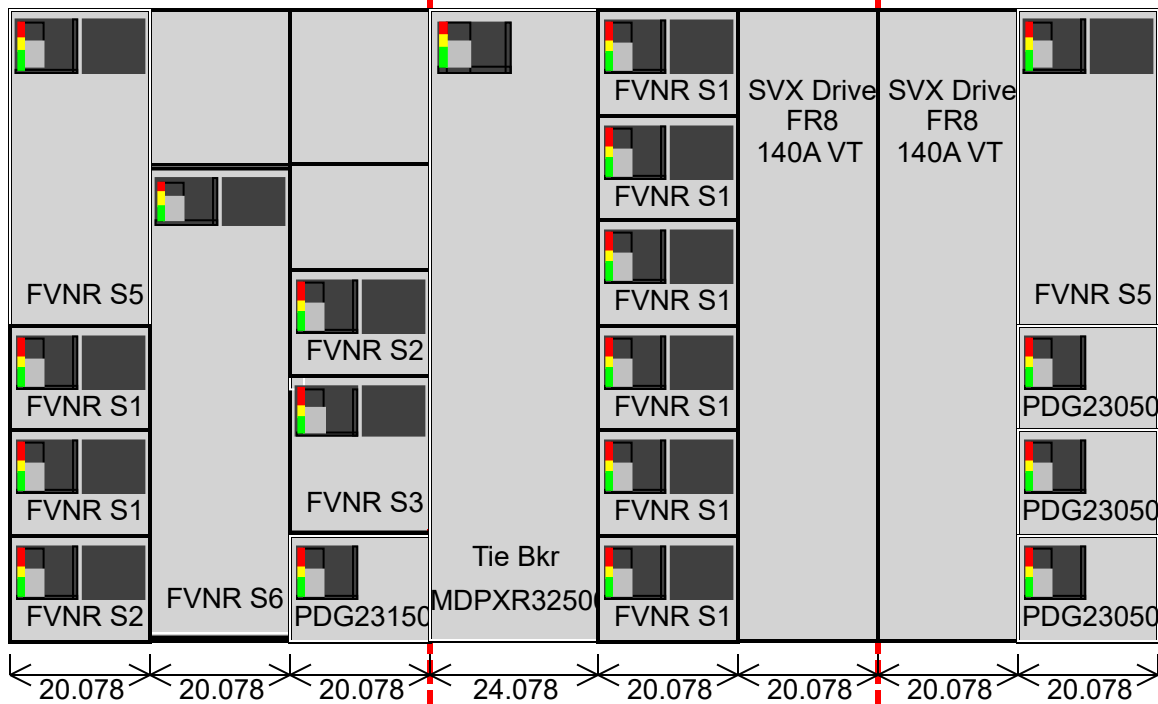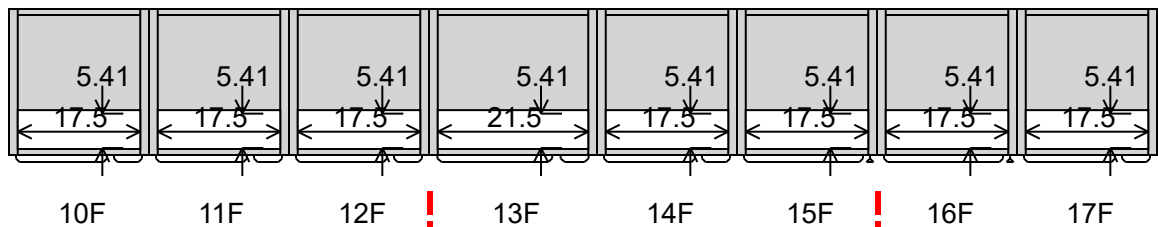

The information on this document is created by Eaton Corporation. It is disclosed in confidence and it is only to be used for the purpose in which it is supplied.	PREPARED BY		DATE	Eaton Fayetteville, NC		
	Jacob Simonsen		8/19/2026			
	APPROVED BY		DATE	JOB NAME Linde Phoenix AZ TSMC Phases AP21-1+ 5		
				DESIGNATION 480V MCC#2 15-ES9487.2		
NEG-ALT Number	VERSION		TYPE		DRAWING TYPE	
	1.0.3.7		Freedom Arc Resistant MCC		Customer Appr.	
RH130721X6K2-0005	REVISION	DWG SIZE	G.O.	ITEM	SHEET	
		A			6 of 14	

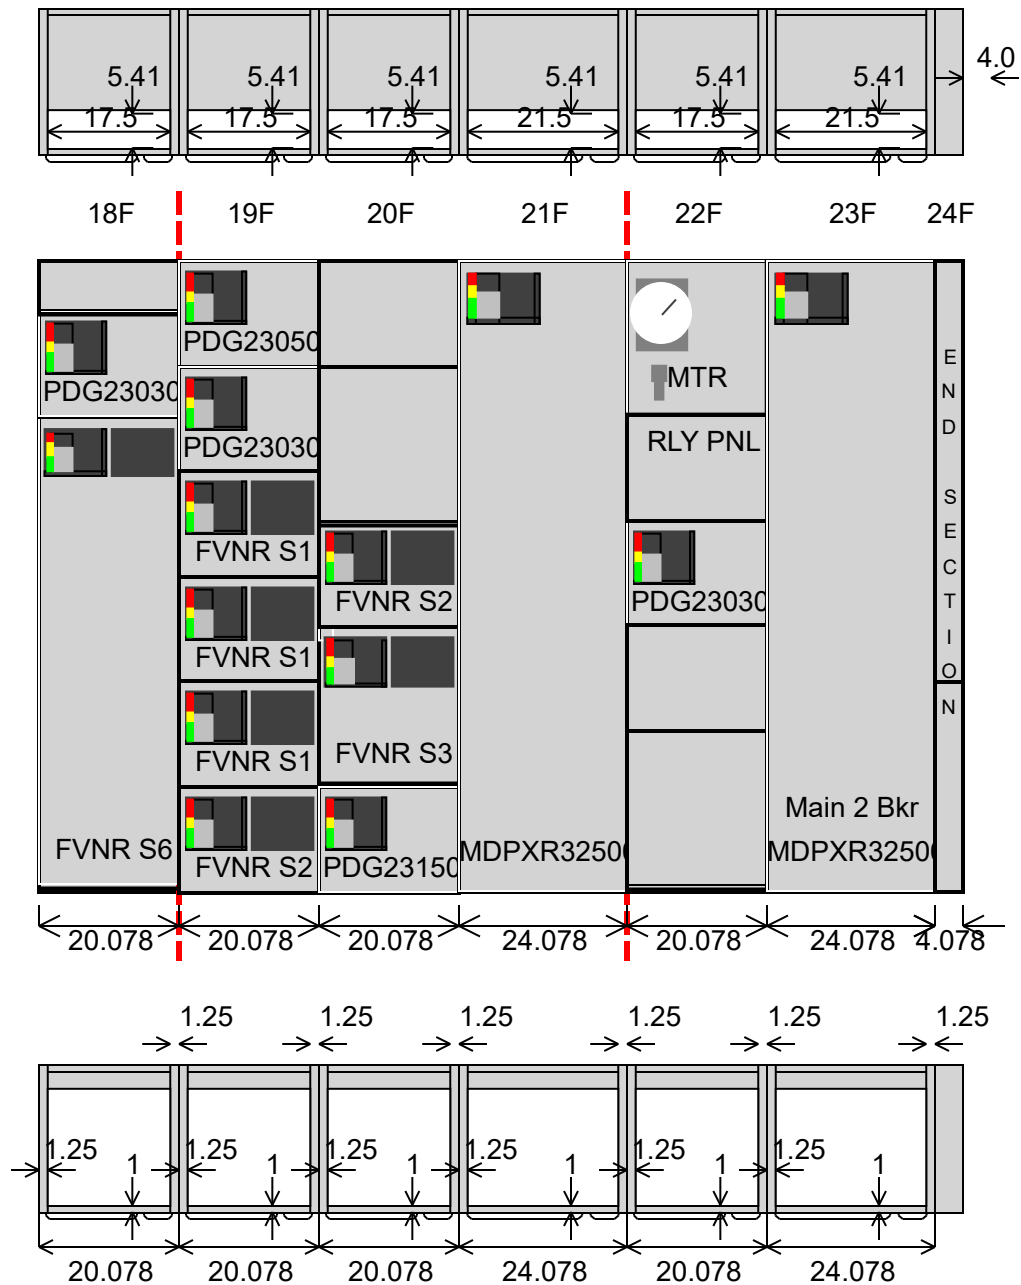

The information on this document is created by Eaton Corporation. It is disclosed in confidence and it is only to be used for the purpose in which it is supplied.

PREPARED BY		DATE	Eaton Fayetteville, NC		
Jacob Simonsen		8/19/2026			
APPROVED BY		DATE	JOB NAME Linde Phoenix AZ TSMC Phases AP21-1+ 5		
			DESIGNATION 480V MCC#2 15-ES9487.2		
VERSION 1.0.3.7		TYPE Freedom Arc Resistant MCC		DRAWING TYPE Customer Appr.	
REVISION	DWG SIZE A	G.O.		ITEM	SHEET 7 of 14

Unit	Nameplate	Description	Class	Starter Size HP/FLA Wire Diag.	Bkr/Sw Poles Trip/Clip	Unit Features
2M	UNIT 200A	MDPXR Main 1 Bkr			MDPXR	1 PD PXR 25 Stand. Rating, High Inter ARMS LSI
	BUS A	(2500A trip), Lugs:		Y	3P	1 Blue ARMS
	MAIN	5-#4-750Kcmil			2500	3 Other Specify
						1 2 Pos. Sel. Sw. (Misc)
						1 Main-Tie-Main using PLC / Operator Interface
						1 Cell Position Switch
						1 Portable Lift Truck
						1 Manual 'Close' PB Cover
						1 Electrical Operation
						1 Bell Alarm Contact
						1 Auxiliary Switch 2A/2B
3C	UNIT 201A	Voltmeter and Switch				1 Additional X-Space
				&ASU 9487 E-ZK N19-HW-NEMA		
3E	BUS A MAIN BREAKER PT'S	12 in. blank relay panel		Y		
3G	BUS A MAIN BREAKER CONTROL POWER	PDG2 Bkr (30A trip)		Y	PDG2 3P 30	1 PD TH FIX STD RAT STD INT
						1 Standard Trip
3J		12" Door		Y		
3M		18" Door		Y		
4M	Transfer Controls CAB1	20 in. blank relay structure, 21" deep		Y		
5M	Transfer Controls CAB2	20 in. blank relay structure, 21" deep		Y		
6B	UNIT 202	FVNR Starter Size 1	F206	1	Tm. Brk.	1 Size 1, STARTER-100VA Typical, w/extra 50VA
		[TM Ckt Brk]		7.5	3P	2 Size 1-4 Starter - Normally Open
				&ASU 9487 E-ZK 20		2 Size 1-4 Starter - Normally Closed
				N2.1-HW-NEMA		1 Standard Trip
						1 PD TH FIX STD RAT STD INT
						1 Red Run
6D	UNIT 203	FVNR Starter Size 1	F206	1	Tm. Brk.	1 Size 1, STARTER-100VA Typical, w/extra 50VA
		[TM Ckt Brk]		6	3P	2 Size 1-4 Starter - Normally Open
				&ASU 9487 E-ZK 20		2 Size 1-4 Starter - Normally Closed
				N2.1-HW-NEMA		1 Standard Trip
						1 PD TH FIX STD RAT STD INT
						1 Red Run
6F	UNIT 204	FVNR Starter Size 1	F206	1	Tm. Brk.	1 Size 1, STARTER-100VA Typical, w/extra 50VA
		[TM Ckt Brk]		2	3P	2 Size 1-4 Starter - Normally Open
				&ASU 9487 E-ZK 15		2 Size 1-4 Starter - Normally Closed
				N2.1-HW-NEMA		1 Standard Trip
						1 PD TH FIX STD RAT STD INT
						1 Red Run
6H	UNIT 206	PDG2 Bkr (50A trip)			PDG2	1 PD PXR 20 Stand. Rating, Stand. Inter
				Y	3P 50	

The information on this document is created by Eaton Corporation. It is disclosed in confidence and it is only to be used for the purpose in which it is supplied.	PREPARED BY		DATE	Eaton Fayetteville, NC		
	Jacob Simonsen		8/19/2026			
	APPROVED BY		DATE	JOB NAME Linde Phoenix AZ TSMC Phases AP21-1+ 5		
				DESIGNATION 480V MCC#2 15-ES9487.2		
	VERSION 1.0.3.7		TYPE Freedom Arc Resistant MCC		DRAWING TYPE Customer Appr.	
NEG-ALT Number RH130721X6K2-0005	REVISION	DWG SIZE A	G.O.		ITEM	SHEET 8 of 14

Unit	Nameplate	Description	Class	Starter Size HP/FLA Wire Diag.	Bkr/Sw Poles Trip/Clip	Unit Features
6K	UNIT 207	PDG2 Bkr (225A trip)			PDG2	1 PD PXR 20 Stand. Rating, Stand. Inter
				Y	3P 225	
6M	UNIT 208	PDG2 Bkr (225A trip)			PDG2	1 PD PXR 20 Stand. Rating, Stand. Inter
				Y	3P 225	
7A		6" Door		Y		
7C	UNIT 209	PDG2 Bkr (225A trip)			PDG2	1 PD PXR 20 Stand. Rating, Stand. Inter
				Y	3P 225	
7E	UNIT 214	FVNR Starter Size 1 [TM Ckt Brk]	F206	1 10 &ASU 9487 E-ZK 20 N2.1-HW-NEMA	Tm. Brk. 3P	1 Size 1, STARTER-100VA Typical, w/extra 50VA 2 Size 1-4 Starter - Normally Open 2 Size 1-4 Starter - Normally Closed 1 Standard Trip 1 PD TH FIX STD RAT STD INT 1 Red Run
7M	UNIT 205	PDG5E Bkr (800A trip)		Y	PDG5E 3P 800	1 PD PXR 20 Stand. Rating, Stand. Inter
8M	UNIT 210	SPX9000 VFD-VT, 140 FLA, 480V, MCCB		100/140 Y	Tm. Brk. 3P 300	1 Standard Trip 1 Blank Device Panel 1 6 DI, 1 DO, 2 AI, 1 AO, 1 +10 Vdc ref, 2 ext, +24 Vdc/EXT + 24 Vdc 1 2 RO (NC-NO) 1 SPX Upgrade 1 SVX9000 Dv/Dt Output Filter - FR8 1 White Power On 1 Amber Fault 1 1 Unit PB (Reset) 1 Additional 150VA CPT 3 C-H Model D15 NEMA A600, 4 Pole 1 Fdr Bkr 1 N.O.-1 N.C. Aux Sw.
9M	UNIT 211	SPX9000 VFD-VT, 140 FLA, 480V, MCCB		100/140 Y	Tm. Brk. 3P 300	1 Standard Trip 1 Blank Device Panel 1 6 DI, 1 DO, 2 AI, 1 AO, 1 +10 Vdc ref, 2 ext, +24 Vdc/EXT + 24 Vdc 1 2 RO (NC-NO) 1 SPX Upgrade 1 SVX9000 Dv/Dt Output Filter - FR8 1 White Power On 1 Amber Fault 1 1 Unit PB (Reset) 1 Additional 150VA CPT 3 C-H Model D15 NEMA A600, 4 Pole 1 Fdr Bkr 1 N.O.-1 N.C. Aux Sw.
10F	UNIT 212	FVNR Starter Size 5 [TM Ckt Brk]	F206	5 200 Y	Tm. Brk. 3P 400	2 Size 5-6 Starter - Normally Open 2 Size 5-6 Starter - Normally Closed 1 PD PXR 20 Stand. Rating, Stand. Inter 1 Red Run 1 C-H Model D15 NEMA A600, 4 Pole 1 Size 5, STARTER-250VA Typical, w/extra 50VA

The information on this document is created by Eaton Corporation. It is disclosed in confidence and it is only to be used for the purpose in which it is supplied.	PREPARED BY		DATE	Eaton Fayetteville, NC		
	Jacob Simonsen		8/19/2026			
	APPROVED BY		DATE	JOB NAME Linde Phoenix AZ TSMC Phases AP21-1+ 5		
				DESIGNATION 480V MCC#2 15-ES9487.2		
NEG-ALT Number RH130721X6K2-0005	VERSION 1.0.3.7		TYPE Freedom Arc Resistant MCC		DRAWING TYPE Customer Appr.	
	REVISION	DWG SIZE A	G.O.	ITEM	SHEET 9 of 14	

Unit	Nameplate	Description	Class	Starter Size HP/FLA Wire Diag.	Bkr/Sw Poles Trip/Clip	Unit Features
						1 Description missing for NOCATNUM
10H	UNIT 215	FVNR Starter Size 1 [TM Ckt Brk]	F206	1 10 &ASU 9487 E-ZK 20 N2.1-HW-NEMA	Tm. Brk. 3P	1 Size 1, STARTER-100VA Typical, w/extra 50VA 2 Size 1-4 Starter - Normally Open 2 Size 1-4 Starter - Normally Closed 1 Standard Trip 1 PD TH FIX STD RAT STD INT 1 Red Run
10K	UNIT 216	FVNR Starter Size 1 [TM Ckt Brk]	F206	1 10 &ASU 9487 E-ZK 20 N2.1-HW-NEMA	Tm. Brk. 3P	1 Size 1, STARTER-100VA Typical, w/extra 50VA 2 Size 1-4 Starter - Normally Open 2 Size 1-4 Starter - Normally Closed 1 Standard Trip 1 PD TH FIX STD RAT STD INT 1 Red Run
10M	UNIT 217	FVNR Starter Size 2 [TM Ckt Brk]	F206	2 25 &ASU 9487 E-ZK 50 N2.2-HW-NEMA	Tm. Brk. 3P	2 Size 1-4 Starter - Normally Open 2 Size 1-4 Starter - Normally Closed 1 PD PXR 20 Stand. Rating, Stand. Inter 1 Size 2, STARTER-100VA Typical, w/extra 50VA 1 Red Run 1 Bkr Aux-1NO/1NC
11C		18" Door		Y		
11M	UNIT 213	FVNR Starter Size 6 [TM Ckt Brk]	F206	6 300 Y	Tm. Brk. 3P 600	1 250VA Individual CPT, Fused 2 Size 5-6 Starter - Normally Open 2 Size 5-6 Starter - Normally Closed 1 PD PXR 20 Stand. Rating, Stand. Inter 1 Red Run 1 C-H Model D15 NEMA A600, 4 Pole 1 Size 6, STARTER-250VA Typical, w/extra 50VA
12C		18" Door		Y		
12E		12" Door		Y		
12G	UNIT 218	FVNR Starter Size 2 [TM Ckt Brk]	F206	2 25 &ASU 9487 E-ZK 50 N2.2-HW-NEMA	Tm. Brk. 3P	2 Size 1-4 Starter - Normally Open 2 Size 1-4 Starter - Normally Closed 1 PD PXR 20 Stand. Rating, Stand. Inter 1 Size 2, STARTER-100VA Typical, w/extra 50VA 1 Red Run 1 Bkr Aux-1NO/1NC
12K	UNIT 219	FVNR Starter Size 3 [TM Ckt Brk]	F206	3 50 &ASU 9487 E-ZK 70 N2.2-HW-NEMA	Tm. Brk. 3P	1 Size 3, STARTER-150VA Typical, w/extra 50VA 2 Size 1-4 Starter - Normally Open 2 Size 1-4 Starter - Normally Closed 1 Bkr Aux-1NO/1NC 1 PD PXR 20 Stand. Rating, Stand. Inter 1 Red Run
12M	UNIT 220	PDG2 Bkr (150A trip)			PDG2	1 PD PXR 20 Stand. Rating, Stand. Inter
The information on this document is created by Eaton Corporation. It is disclosed in confidence and it is only to be used for the purpose in which it is supplied.		PREPARED BY	DATE	Eaton Fayetteville, NC		
		Jacob Simonsen	8/19/2026	JOB NAME	Linde Phoenix AZ TSMC Phases AP21-1+ 5	
		APPROVED BY	DATE	DESIGNATION	480V MCC#2 15-ES9487.2	
		VERSION	TYPE	DRAWING TYPE		
		1.0.3.7	Freedom Arc Resistant MCC	Customer Appr.		
NEG-ALT Number	REVISION	DWG SIZE	G.O.	ITEM	SHEET	
RH130721X6K2-0005		A			10 of 14	

Unit	Nameplate	Description	Class	Starter Size HP/FLA Wire Diag.	Bkr/Sw Poles Trip/Clip	Unit Features
				Y	3P 150	
13M	UNIT 200C	MDPXR Main Tie Bkr			MDPXR	1 PD PXR 25 Stand. Rating, High Inter ARMS LSI
	TIE BREAKER	(2500A trip), Lugs: 5-#4-750Kcmil		Y	3P 2500	1 Blue ARMS 3 Other Specify 1 2 Pos. Sel. Sw. (Misc) 1 Main-Tie-Main using PLC / Operator Interface 1 Cell Position Switch 1 Portable Lift Truck 1 Manual 'Close' PB Cover 1 Electrical Operation 1 Bell Alarm Contact 1 Auxiliary Switch 2A/2B
14B	UNIT 221	FVNR Starter Size 1	F206	1	Tm. Brk.	1 Size 1, STARTER-100VA Typical, w/extra 50VA
		[TM Ckt Brk]		7.5 &ASU 9487 E-ZK 20 N2.1-HW-NEMA	3P	2 Size 1-4 Starter - Normally Open 2 Size 1-4 Starter - Normally Closed
14D	UNIT 222	FVNR Starter Size 1	F206	1	Tm. Brk.	1 Standard Trip 1 PD TH FIX STD RAT STD INT 1 Red Run
		[TM Ckt Brk]		6 &ASU 9487 E-ZK 20 N2.1-HW-NEMA	3P	1 Size 1, STARTER-100VA Typical, w/extra 50VA 2 Size 1-4 Starter - Normally Open 2 Size 1-4 Starter - Normally Closed
14F	UNIT 223	FVNR Starter Size 1	F206	1	Tm. Brk.	1 Standard Trip 1 PD TH FIX STD RAT STD INT 1 Red Run
		[TM Ckt Brk]		2 &ASU 9487 E-ZK 15 N2.1-HW-NEMA	3P	1 Size 1, STARTER-100VA Typical, w/extra 50VA 2 Size 1-4 Starter - Normally Open 2 Size 1-4 Starter - Normally Closed
14H	UNIT 224	FVNR Starter Size 1	F206	1	Tm. Brk.	1 Standard Trip 1 PD TH FIX STD RAT STD INT 1 Red Run
		[TM Ckt Brk]		7.5 &ASU 9487 E-ZK 20 N2.1-HW-NEMA	3P	1 Size 1, STARTER-100VA Typical, w/extra 50VA 2 Size 1-4 Starter - Normally Open 2 Size 1-4 Starter - Normally Closed
14K	UNIT 225	FVNR Starter Size 1	F206	1	Tm. Brk.	1 Standard Trip 1 PD TH FIX STD RAT STD INT 1 Red Run
		[TM Ckt Brk]		6 &ASU 9487 E-ZK 20 N2.1-HW-NEMA	3P	1 Size 1, STARTER-100VA Typical, w/extra 50VA 2 Size 1-4 Starter - Normally Open 2 Size 1-4 Starter - Normally Closed
14M	UNIT 226	FVNR Starter Size 1	F206	1	Tm. Brk.	1 Standard Trip 1 PD TH FIX STD RAT STD INT 1 Red Run
		[TM Ckt Brk]		2 &ASU 9487 E-ZK 15 N2.1-HW-NEMA	3P	1 Size 1, STARTER-100VA Typical, w/extra 50VA 2 Size 1-4 Starter - Normally Open 2 Size 1-4 Starter - Normally Closed
The information on this document is created by Eaton Corporation. It is disclosed in confidence and it is only to be used for the purpose in which it is supplied.			PREPARED BY	DATE	Eaton Fayetteville, NC	
			Jacob Simonsen	8/19/2026		
			APPROVED BY	DATE	JOB NAME	Linde Phoenix AZ TSMC Phases AP21-1+ 5
					DESIGNATION	480V MCC#2 15-ES9487.2
			VERSION	TYPE	DRAWING TYPE	
			1.0.3.7	Freedom Arc Resistant MCC	Customer Appr.	
NEG-ALT Number			REVISION	DWG SIZE	G.O.	ITEM
RH130721X6K2-0005				A		SHEET
			11 of 14			

Unit	Nameplate	Description	Class	Starter Size HP/FLA Wire Diag.	Bkr/Sw Poles Trip/Clip	Unit Features
						1 Standard Trip 1 PD TH FIX STD RAT STD INT 1 Red Run
15M	UNIT 227	SPX9000 VFD-VT, 140 FLA, 480V, MCCB		100/140 Y	Tm. Brk. 3P 300	1 Standard Trip 1 Blank Device Panel 1 6 DI, 1 DO, 2 AI, 1 AO, 1 +10 Vdc ref, 2 ext, +24 Vdc/EXT + 24 Vdc 1 2 RO (NC-NO) 1 SPX Upgrade 1 SVX9000 Dv/Dt Output Filter - FR8 1 White Power On 1 Amber Fault 1 1 Unit PB (Reset) 1 Additional 150VA CPT 3 C-H Model D15 NEMA A600, 4 Pole 1 Fdr Bkr 1 N.O.-1 N.C. Aux Sw.
16M	UNIT 228	SPX9000 VFD-VT, 140 FLA, 480V, MCCB		100/140 Y	Tm. Brk. 3P 300	1 Standard Trip 1 Blank Device Panel 1 6 DI, 1 DO, 2 AI, 1 AO, 1 +10 Vdc ref, 2 ext, +24 Vdc/EXT + 24 Vdc 1 2 RO (NC-NO) 1 SPX Upgrade 1 SVX9000 Dv/Dt Output Filter - FR8 1 White Power On 1 Amber Fault 1 1 Unit PB (Reset) 1 Additional 150VA CPT 3 C-H Model D15 NEMA A600, 4 Pole 1 Fdr Bkr 1 N.O.-1 N.C. Aux Sw.
17F	UNIT 229	FVNR Starter Size 5 [TM Ckt Brk]	F206	5 200 Y	Tm. Brk. 3P 400	2 Size 5-6 Starter - Normally Open 2 Size 5-6 Starter - Normally Closed 1 PD PXR 20 Stand. Rating, Stand. Inter 1 Red Run 1 C-H Model D15 NEMA A600, 4 Pole 1 Size 5, STARTER-250VA Typical, w/extra 50VA 1 Description missing for NOCATNUM
17H	UNIT 231	PDG2 Bkr (50A trip)			PDG2 3P 50	1 PD PXR 20 Stand. Rating, Stand. Inter
17K	UNIT 232	PDG2 Bkr (50A trip)		Y	PDG2 3P 50	1 PD PXR 20 Stand. Rating, Stand. Inter
17M	UNIT 233	PDG2 Bkr (50A trip)		Y	PDG2 3P 50	1 PD PXR 20 Stand. Rating, Stand. Inter
18A		6" Door		Y		
18C	UNIT 234	PDG2 Bkr (30A trip)			PDG2 3P 30	1 PD PXR 20 Stand. Rating, Stand. Inter
18M	UNIT 230	FVNR Starter Size 6 [TM Ckt Brk]	F206	6 300 Y	Tm. Brk. 3P 600	1 250VA Individual CPT, Fused 2 Size 5-6 Starter - Normally Open 2 Size 5-6 Starter - Normally Closed
The information on this document is created by Eaton Corporation. It is disclosed in confidence and it is only to be used for the purpose in which it is supplied.		PREPARED BY	DATE	Eaton		
		Jacob Simonsen	8/19/2026	Fayetteville, NC		
		APPROVED BY	DATE	JOB NAME	Linde Phoenix AZ TSMC Phases AP21-1+ 5	
				DESIGNATION	480V MCC#2 15-ES9487.2	
		VERSION	TYPE	DRAWING TYPE		
		1.0.3.7	Freedom Arc Resistant MCC	Customer Appr.		
NEG-ALT Number	REVISION	DWG SIZE	G.O.	ITEM	SHEET	
RH130721X6K2-0005		A			12 of 14	

Unit	Nameplate	Description	Class	Starter Size HP/FLA Wire Diag.	Bkr/Sw Poles Trip/Clip	Unit Features
						1 PD PXR 20 Stand. Rating, Stand. Inter 1 Red Run 1 C-H Model D15 NEMA A600, 4 Pole 1 Size 6, STARTER-250VA Typical, w/extra 50VA
19B	UNIT 235	PDG2 Bkr (50A trip)			PDG2	1 PD PXR 20 Stand. Rating, Stand. Inter
				Y	3P 50	
19D	UNIT 236	PDG2 Bkr (30A trip)			PDG2	1 PD PXR 20 Stand. Rating, Stand. Inter
				Y	3P 30	
19F	UNIT 237	FVNR Starter Size 1 [TM Ckt Brk]	F206	1 10 &ASU 9487 E-ZK 20 N2.1-HW-NEMA	Tm. Brk. 3P	1 Size 1, STARTER-100VA Typical, w/extra 50VA 2 Size 1-4 Starter - Normally Open 2 Size 1-4 Starter - Normally Closed 1 Standard Trip 1 PD TH FIX STD RAT STD INT 1 Red Run
19H	UNIT 238	FVNR Starter Size 1 [TM Ckt Brk]	F206	1 10 &ASU 9487 E-ZK 20 N2.1-HW-NEMA	Tm. Brk. 3P	1 Size 1, STARTER-100VA Typical, w/extra 50VA 2 Size 1-4 Starter - Normally Open 2 Size 1-4 Starter - Normally Closed 1 Standard Trip 1 PD TH FIX STD RAT STD INT 1 Red Run
19K	UNIT 239	FVNR Starter Size 1 [HMCP]	F206	1 10 &ASU 9487 E-ZK 15 N2.1-HW-NEMA	HMCP 3P	1 Size 1, STARTER-100VA Typical, w/extra 50VA 2 Size 1-4 Starter - Normally Open 2 Size 1-4 Starter - Normally Closed 1 Standard Trip 1 Breaker HMCP 1 Red Run
19M	UNIT 240	FVNR Starter Size 2 [TM Ckt Brk]	F206	2 25 &ASU 9487 E-ZK 50 N2.2-HW-NEMA	Tm. Brk. 3P	2 Size 1-4 Starter - Normally Open 2 Size 1-4 Starter - Normally Closed 1 PD PXR 20 Stand. Rating, Stand. Inter 1 Size 2, STARTER-100VA Typical, w/extra 50VA 1 Red Run 1 Bkr Aux-1NO/1NC
20B		12" Door		Y		
20E		18" Door		Y		
20G	UNIT 241	FVNR Starter Size 2 [TM Ckt Brk]	F206	2 25 &ASU 9487 E-ZK 50 N2.2-HW-NEMA	Tm. Brk. 3P	2 Size 1-4 Starter - Normally Open 2 Size 1-4 Starter - Normally Closed 1 PD PXR 20 Stand. Rating, Stand. Inter 1 Size 2, STARTER-100VA Typical, w/extra 50VA 1 Red Run 1 Bkr Aux-1NO/1NC
20K	UNIT 242	FVNR Starter Size 3	F206	3	Tm. Brk.	1 Size 3, STARTER-150VA Typical, w/extra 50VA
The information on this document is created by Eaton Corporation. It is disclosed in confidence and it is only to be used for the purpose in which it is supplied.		PREPARED BY	DATE	Eaton Fayetteville, NC		
		Jacob Simonsen	8/19/2026	JOB NAME	Linde Phoenix AZ TSMC Phases AP21-1+ 5	
		APPROVED BY	DATE	DESIGNATION	480V MCC#2 15-ES9487.2	
		VERSION	TYPE	DRAWING TYPE		
		1.0.3.7	Freedom Arc Resistant MCC	Customer Appr.		
NEG-ALT Number	REVISION	DWG SIZE	G.O.	ITEM	SHEET	
RH130721X6K2-0005		A			13 of 14	

Unit	Nameplate	Description	Class	Starter Size HP/FLA Wire Diag.	Bkr/Sw Poles Trip/Clip	Unit Features
		[TM Ckt Brk]		50 &ASU 9487 E-ZK 70 N2.2-HW-NEMA	3P	2 Size 1-4 Starter - Normally Open 2 Size 1-4 Starter - Normally Closed 1 Bkr Aux-1NO/1NC 1 PD PXR 20 Stand. Rating, Stand. Inter 1 Red Run
20M	UNIT 243	PDG2 Bkr (150A trip)			PDG2 3P 150	1 PD PXR 20 Stand. Rating, Stand. Inter
21M	UNIT 200D	MDPXR Bkr (2500A	Y		MDPXR	1 PD PXR 25 Stand. Rating, High Inter ARMS LSI
	GENERATOR MAIN BREAKER	trip)	Y		3P 2500	1 Blue ARMS 3 Other Specify 1 2 Pos. Sel. Sw. (Misc) 1 Cell Position Switch 1 Description missing for NOCATNUM 1 Electrical Operation 1 Bell Alarm Contact 1 Auxiliary Switch 2A/2B
22C	UNIT 201B	Voltmeter and Switch		&ASU 9487 E-ZK N19-HW-NEMA		1 Additional X-Space
22E	BUS B MAIN BREAKER PT'S	12 in. blank relay panel	Y			
22G	BUS B MAIN BREAKER CONTROL POWER	PDG2 Bkr (30A trip)	Y		PDG2 3P 30	1 PD TH FIX STD RAT STD INT 1 Standard Trip
22J		12" Door	Y			
22M		18" Door	Y			
23M	UNIT 200B	MDPXR Main 3 Bkr			MDPXR	1 PD PXR 25 Stand. Rating, High Inter ARMS LSI
	BUS B MAIN	(2500A trip), Lugs: 5-#4-750Kcmil	Y		3P 2500	1 Blue ARMS 3 Other Specify 1 2 Pos. Sel. Sw. (Misc) 1 Main-Tie-Main using PLC / Operator Interface 1 Cell Position Switch 1 Portable Lift Truck 1 Manual 'Close' PB Cover 1 Electrical Operation 1 Bell Alarm Contact 1 Auxiliary Switch 2A/2B
The information on this document is created by Eaton Corporation. It is disclosed in confidence and it is only to be used for the purpose in which it is supplied.		PREPARED BY	DATE	Eaton Fayetteville, NC		
		Jacob Simonsen	8/19/2026	JOB NAME	Linde Phoenix AZ TSMC Phases AP21-1+ 5	
		APPROVED BY	DATE	DESIGNATION	480V MCC#2 15-ES9487.2	
		VERSION	TYPE	DRAWING TYPE		
		1.0.3.7	Freedom Arc Resistant MCC	Customer Appr.		
NEG-ALT Number	REVISION	DWG SIZE	G.O.	ITEM	SHEET	
RH130721X6K2-0005		A			14 of 14	

MCC General Information

MCC General Information

Wiring Diagram Type Customer Specific
MCC Quantity 1
Standards UL845, NEMA, NEC
Special Codes UL
Service Voltage (3 Phase) 480
Frequency 60
System 3PH3W
Witness Testing No

PL Color (Rev/Slow) Amber
Exertherm Continuous Thermal Monitoring No
System

Structure Schedule

There are 24 structure(s).
Structure(s) 7 have a 1200 A Vertical Bus.
Structure(s) 1, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 2, 20, 21, 22, 23, 24, 3, 4, 5, 6, 8, 9 have a 600 A Vertical Bus.
Total width of all sections is 464"
Height of all sections is 90"

Enclosure Specifications

Total Structures 24
Type NEMA 1 Gasketed
Depth 21" Front Mt Only
Height 90"
Horizontal Wireways 9" High, Top & Bottom
Vertical Wireways 4"
Channel Sills No
150 Watt Space Heaters No
Master Terminal Block Location None
IBC/CBC Seismic Qualified Yes
ABS Certified No
Bottom Plates Standard
Space Heater Thermostat No

Unit Modifications

Device Labels
#14awg, MTW Control Wire
Wiremarkers at Each End
Solid State Overload Relay (Standard C440)
Terminal Block - Latching Pull-Apart, Std.
Motor Management Relay (C445)

Bus System Specifications

Main Bus Amps 2500
Main Bus Bar Plating Tin
Insulated Horiz. Bus Yes
1000A/sq in. Cu Bus No
Vertical Bus Amps See Structure Schedule
Vertical Bus Material Tin-Plated Copper
Bus Bracing 65
Ground Bus Location Bottom
Ground Bus Lug Size 1-#6-350Kcmil
Ground Bus Lug Type Screw
Plug-in 300A Vert. Gnd. Bus No
Neutral None
Horizontal Bus Temperature Rise 50 deg C
Bottom Vert. Bus Barrier Yes
Vertical Ground Bus No
Vertical Bus Barrier Labyrinth, Isolated/
Insulated with shutters
Ground Bus 800

Incoming Line Termination

Cable Entry Bottom
Splice Kit / Transition None
MCC Type Match Up **None**
MCC Type Match Up GO#
Device: MDPXR Main 1 Bkr (2500A trip), Lugs: 5-#4-750Kcmil

MCC Starter Specifications

Wiring Class 1B
Control Voltage 120
Control Voltage Src Ind CPT
Nameplate Size 1" X 2.5"
Nameplate Color Black / White Letters
Pilot Dev. Model 10250T
Ind. Light Type 6v Xfmr

The information on this document is created by Eaton Corporation. It is disclosed in confidence and it is only to be used for the purpose in which it is supplied.	PREPARED BY		DATE	Eaton Fayetteville, NC		
	Jacob Simonsen		8/19/2026			
	APPROVED BY		DATE	JOB NAME	Linde Phoenix AZ TSMC Phases AP21-1+ 5	
				DESIGNATION	480V MCC#3 13-ES9487.3	
	VERSION		TYPE		DRAWING TYPE	
	1.0.3.7		Freedom Arc Resistant MCC		Customer Appr.	
NEG-ALT Number	REVISION	DWG SIZE		G.O.	ITEM	SHEET
RH130721X6K2-0005		A				1 of 14

Notes/Special Instructions

Breaker control switch - unit 2M
 External Arms light and switch - unit 2M
 Padlock cover for ARMs selector switch - unit 2M
 Breaker to have 6a/6b MOC contacts - unit 2M
 Breaker to have 4 Form-C cell switch contacts - unit 2M
 Breaker to have 2 Form-C OTS contacts - unit 2M
 Shunt trip, motor operator and spring release all 120VAC - unit 2M
 PTs to ATS - unit 3E
 PTs connected to line said of main breakers - unit 3E
 Breaker terminal shield - unit 3G
 Control power to ATS main breakers - unit 3G
 CPT connected to line side of main breakers - unit 3G
 Breaker terminal shield - unit 6B
 Breaker terminal shield - unit 6D
 Breaker terminal shield - unit 6F
 Breaker terminal shield - unit 6H
 Breaker terminal shield - unit 6K
 Breaker terminal shield - unit 6M
 Breaker terminal shield - unit 7E
 Breaker terminal shield - unit 7C
 Breaker terminal shield - unit 8B
 Control wire before CPT to be black and labeled "Hot with line side bus energized" - unit 8H
 Breaker terminal shield - unit 8H
 C445 is place holder for SEL-849 - unit 8H
 Add electrical interlock between 8H and 17F - unit 8H
 Breaker terminal shield - unit 8K
 Breaker terminal shield - unit 8M
 Breaker terminal shield - unit 10M
 VFD control relay coil surge supressor - unit 10M
 Add electrical interlock between 9M and 15M - unit 10M
 Add electrical interlock between 10M and 16M - unit 10M
 Control wire before CPT to be black and labeled "Hot with line side bus energized" - unit 11M
 Breaker to be NGH 800AF/T - ARMS not required - unit 11M
 C445 is place holder for SEL-849 - unit 11M
 Add electrical interlock between 11M and 18M - unit 11M
 Breaker terminal shield - unit 11C
 Breaker terminal shield - unit 9M
 VFD control relay coil surge supressor - unit 9M
 Add electrical interlock between 9M and 15M - unit 9M
 Add electrical interlock between 10M and 16M - unit 9M
 Master NP to read "480V MCC#3 9-ES9487.3"
 Control wire above 150VAC to be black - add caution label to bucket doors
 Include Magnum breaker lifting yoke to work with lift truck
 PSC Provided Main-Tie-Main-Gen transfer scheme
 Breaker terminal shield - unit 12M
 Breaker terminal shield - unit 12K
 Breaker terminal shield - unit 12G
 Breaker terminal shield - unit 12E
 Breaker control switch - unit 13M




The information on this document is created by Eaton Corporation. It is disclosed in confidence and it is only to be used for the purpose in which it is supplied.	PREPARED BY Jacob Simonsen		DATE 8/19/2026	Eaton Fayetteville, NC		
	APPROVED BY		DATE	JOB NAME Linde Phoenix AZ TSMC Phases AP21-1+ 5		
				DESIGNATION 480V MCC#3 13-ES9487.3		
	VERSION 1.0.3.7		TYPE Freedom Arc Resistant MCC		DRAWING TYPE Customer Appr.	
NEG-ALT Number RH130721X6K2-0005	REVISION	DWG SIZE A	G.O.		ITEM	SHEET 2 of 14

External Arms light and switch - unit 13M
 Padlock cover for ARMs selector switch - unit 13M
 Breaker to have 6a/6b MOC contacts - unit 13M
 Breaker to have 4 Form-C cell switch contacts - unit 13M
 Breaker to have 2 Form-C OTS contacts - unit 13M
 Shunt trip, motor operator and spring release all 120VAC - unit 13M
 Breaker terminal shield - unit 14B
 Breaker terminal shield - unit 14D
 Breaker terminal shield - unit 14F
 Breaker terminal shield - unit 14H
 Breaker terminal shield - unit 14K
 Breaker terminal shield - unit 14M
 Breaker terminal shield - unit 15M
 VFD control relay coil surge supressor - unit 15M
 Add electrical interlock between 9M and 15M - unit 15M
 Add electrical interlock between 10M and 16M - unit 15M
 Breaker terminal shield - unit 16M
 VFD control relay coil surge supressor - unit 16M
 Add electrical interlock between 9M and 15M - unit 16M
 Add electrical interlock between 10M and 16M - unit 16M
 Control wire before CPT to be black and labeled "Hot with line side bus energized" - unit 17F
 Breaker terminal shield - unit 17F
 C445 is place holder for SEL-849 - unit 17F
 Add electrical interlock between 8H and 17F - unit 17F
 Breaker terminal shield - unit 17H
 Breaker terminal shield - unit 17K
 Breaker terminal shield - unit 17M
 Control wire before CPT to be black and labeled "Hot with line side bus energized" - unit 18M
 Breaker to be NGH 800AF/T - ARMS not required - unit 18M
 C445 is place holder for SEL-849 - unit 18M
 Add electrical interlock between 11M and 18M - unit 18M
 Breaker terminal shield - unit 18C
 Breaker terminal shield - unit 19B
 Breaker terminal shield - unit 19D
 Breaker terminal shield - unit 19F
 Breaker terminal shield - unit 19H
 Breaker terminal shield - unit 19K
 Breaker terminal shield - unit 19M
 Breaker terminal shield - unit 20M
 Breaker terminal shield - unit 20K
 Breaker terminal shield - unit 20G
 Breaker control switch - unit 21M
 External ARMs light and switch - unit 21M
 Padlock cover for ARMs selector switch - unit 21M
 Breaker to have 6a/6b MOC contacts - unit 21M
 Breaker to have 4 Form-C cell switch contacts - unit 21M
 Breaker to have 2 Form-C OTS contacts - unit 21M
 Shunt trip, motor operator and spring release all 120VAC - unit 21M
 Breaker terminal shield - unit 22G
 Control power to ATS main breakers - unit 22G
 CPT connected to line side of main breakers - unit 22G


The information on this document is created by Eaton Corporation. It is disclosed in confidence and it is only to be used for the purpose in which it is supplied.	PREPARED BY Jacob Simonsen		DATE 8/19/2026	Eaton Fayetteville, NC		
	APPROVED BY		DATE	JOB NAME Linde Phoenix AZ TSMC Phases AP21-1+ 5		
				DESIGNATION 480V MCC#3 13-ES9487.3		
	VERSION 1.0.3.7		TYPE Freedom Arc Resistant MCC		DRAWING TYPE Customer Appr.	
NEG-ALT Number RH130721X6K2-0005	REVISION	DWG SIZE A	G.O.		ITEM	SHEET 3 of 14

Breaker control switch - unit 23M
 External Arms light and switch - unit 23M
 Padlock cover for ARMs selector switch - unit 23M
 Breaker to have 6a/6b MOC contacts - unit 23M
 Breaker to have 4 Form-C cell switch contacts - unit 23M
 Breaker to have 2 Form-C OTS contacts - unit 23M
 Shunt trip, motor operator and spring release all 120VAC - unit 23M
 Motor operators

The information on this document is created by Eaton Corporation. It is disclosed in confidence and it is only to be used for the purpose in which it is supplied.	PREPARED BY Jacob Simonsen		DATE 8/19/2026		Eaton Fayetteville, NC	
	APPROVED BY		DATE		JOB NAME Linde Phoenix AZ TSMC Phases AP21-1+ 5	
			DESIGNATION 480V MCC#3 13-ES9487.3			
	VERSION 1.0.3.7		TYPE Freedom Arc Resistant MCC		DRAWING TYPE Customer Appr.	
NEG-ALT Number RH130721X6K2-0005	REVISION	DWG SIZE A	G.O.		ITEM	SHEET 4 of 14

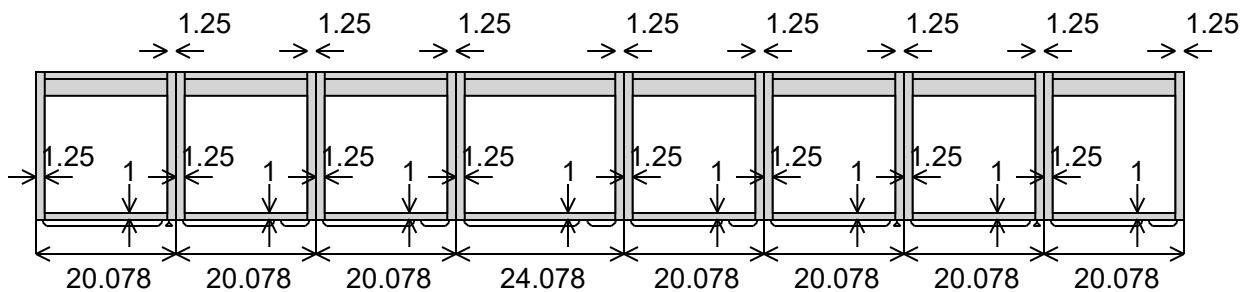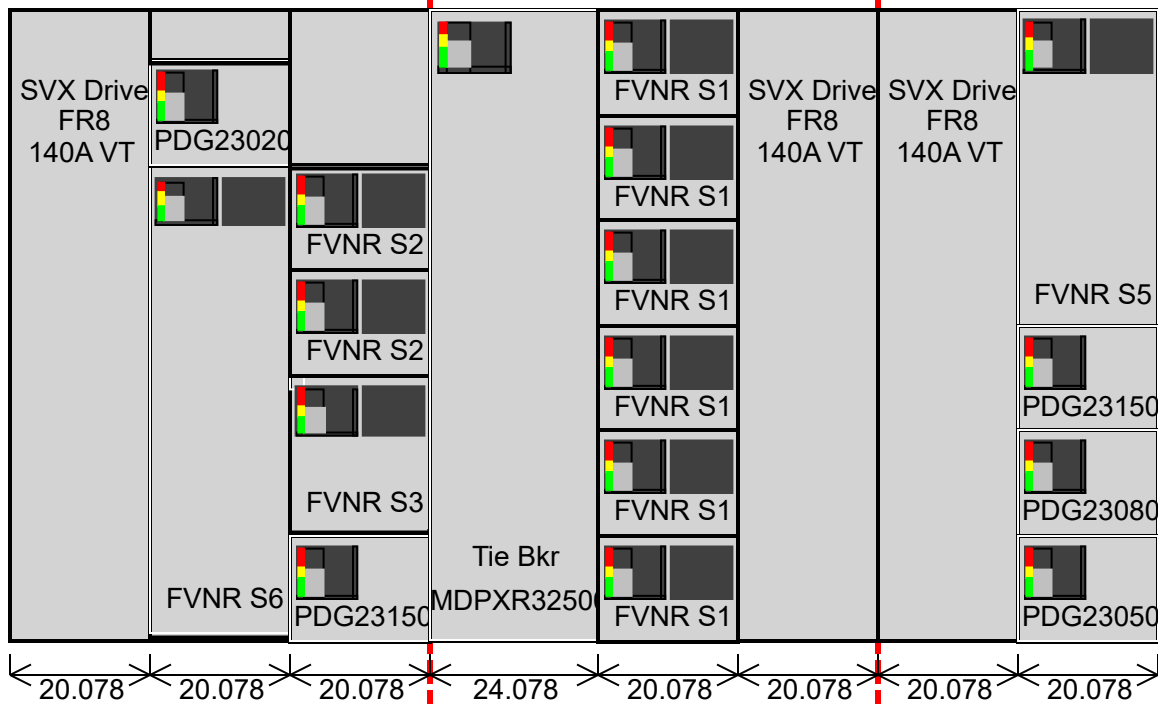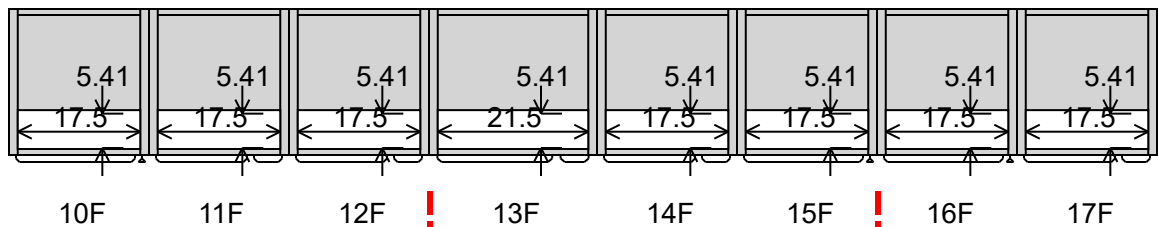

The information on this document is created by Eaton Corporation. It is disclosed in confidence and it is only to be used for the purpose in which it is supplied.	PREPARED BY		DATE	Eaton Fayetteville, NC		
	Jacob Simonsen		8/19/2026			
	APPROVED BY		DATE	JOB NAME Linde Phoenix AZ TSMC Phases AP21-1+ 5		
				DESIGNATION 480V MCC#3 13-ES9487.3		
NEG-ALT Number	VERSION		TYPE		DRAWING TYPE	
	1.0.3.7		Freedom Arc Resistant MCC		Customer Appr.	
RH130721X6K2-0005	REVISION	DWG SIZE	G.O.	ITEM	SHEET	
		A			6 of 14	

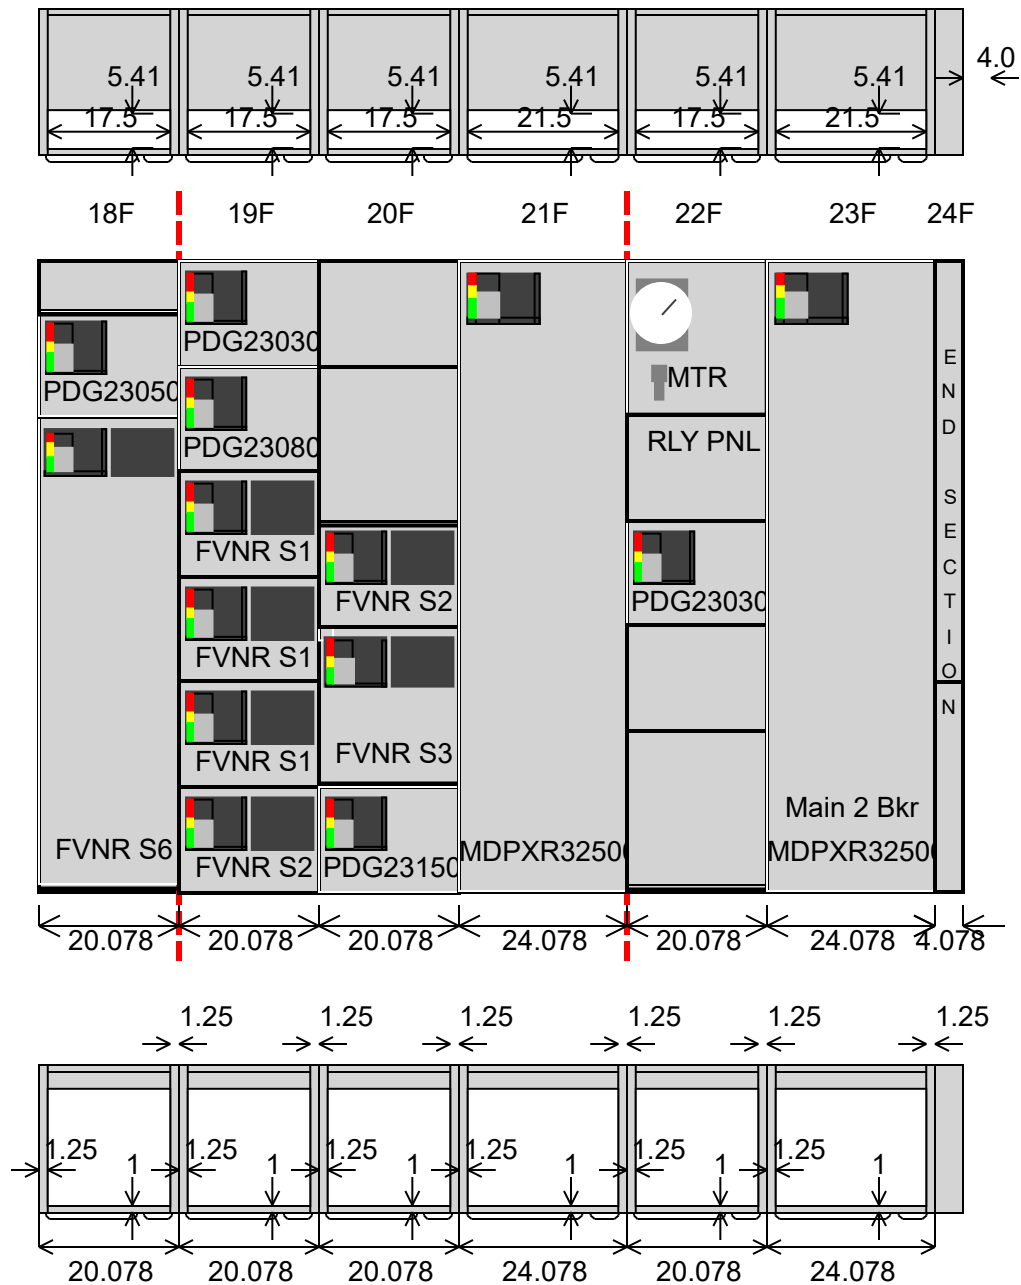

The information on this document is created by Eaton Corporation. It is disclosed in confidence and it is only to be used for the purpose in which it is supplied.

PREPARED BY		DATE	Eaton		Fayetteville, NC	
Jacob Simonsen		8/19/2026				
APPROVED BY		DATE	JOB NAME		Linde Phoenix AZ TSMC Phases AP21-1+ 5	
			DESIGNATION		480V MCC#3 13-ES9487.3	
VERSION		TYPE		DRAWING TYPE		
1.0.3.7		Freedom Arc Resistant MCC		Customer Appr.		
REVISION		DWG SIZE	G.O.		ITEM	SHEET
		A				7 of 14

Unit	Nameplate	Description	Class	Starter Size HP/FLA Wire Diag.	Bkr/Sw Poles Trip/Clip	Unit Features
2M	UNIT 300A	MDPXR Main 1 Bkr			MDPXR	1 PD PXR 25 Stand. Rating, High Inter ARMS LSI
	BUS A	(2500A trip), Lugs:		Y	3P	1 Blue ARMS
	MAIN	5-#4-750Kcmil			2500	3 Other Specify
						1 2 Pos. Sel. Sw. (Misc)
						1 Main-Tie-Main using PLC / Operator Interface
						1 Cell Position Switch
						1 Portable Lift Truck
						1 Manual 'Close' PB Cover
						1 Electrical Operation
						1 Bell Alarm Contact
						1 Auxiliary Switch 2A/2B
3C	UNIT 301A	Voltmeter and Switch				1 Additional X-Space
				&ASU 9487 E-ZK N19-HW-NEMA		
3E	BUS A MAIN BREAKER PT'S	12 in. blank relay panel		Y		
3G	BUS A MAIN BREAKER CONTROL POWER	PDG2 Bkr (30A trip)		Y	PDG2 3P 30	1 PD TH FIX STD RAT STD INT
						1 Standard Trip
3J		12" Door		Y		
3M		18" Door		Y		
4M	Transfer Controls CAB1	20 in. blank relay structure, 21" deep		Y		
5M	Transfer Controls CAB2	20 in. blank relay structure, 21" deep		Y		
6B	UNIT 302	FVNR Starter Size 1	F206	1	Tm. Brk.	1 Size 1, STARTER-100VA Typical, w/extra 50VA
		[TM Ckt Brk]		7.5	3P	2 Size 1-4 Starter - Normally Open
				&ASU 9487 E-ZK 20		2 Size 1-4 Starter - Normally Closed
				N2.1-HW-NEMA		1 Standard Trip
						1 PD TH FIX STD RAT STD INT
						1 Red Run
6D	UNIT 303	FVNR Starter Size 1	F206	1	Tm. Brk.	1 Size 1, STARTER-100VA Typical, w/extra 50VA
		[TM Ckt Brk]		6	3P	2 Size 1-4 Starter - Normally Open
				&ASU 9487 E-ZK 20		2 Size 1-4 Starter - Normally Closed
				N2.1-HW-NEMA		1 Standard Trip
						1 PD TH FIX STD RAT STD INT
						1 Red Run
6F	UNIT 304	FVNR Starter Size 1	F206	1	Tm. Brk.	1 Size 1, STARTER-100VA Typical, w/extra 50VA
		[TM Ckt Brk]		2	3P	2 Size 1-4 Starter - Normally Open
				&ASU 9487 E-ZK 15		2 Size 1-4 Starter - Normally Closed
				N2.1-HW-NEMA		1 Standard Trip
						1 PD TH FIX STD RAT STD INT
						1 Red Run
6H	UNIT 306	PDG2 Bkr (150A trip)			PDG2	1 PD PXR 20 Stand. Rating, Stand. Inter
				Y	3P 150	

The information on this document is created by Eaton Corporation. It is disclosed in confidence and it is only to be used for the purpose in which it is supplied.	PREPARED BY		DATE	Eaton Fayetteville, NC		
	Jacob Simonsen		8/19/2026			
	APPROVED BY		DATE	JOB NAME Linde Phoenix AZ TSMC Phases AP21-1+ 5		
				DESIGNATION 480V MCC#3 13-ES9487.3		
	VERSION 1.0.3.7		TYPE Freedom Arc Resistant MCC		DRAWING TYPE Customer Appr.	
NEG-ALT Number RH130721X6K2-0005	REVISION	DWG SIZE A	G.O.		ITEM	SHEET 8 of 14

Unit	Nameplate	Description	Class	Starter Size HP/FLA Wire Diag.	Bkr/Sw Poles Trip/Clip	Unit Features
6K	UNIT 307	PDG2 Bkr (50A trip)		Y	PDG2 3P 50	1 PD PXR 20 Stand. Rating, Stand. Inter
6M	UNIT 308	PDG2 Bkr (150A trip)		Y	PDG2 3P 150	1 PD PXR 20 Stand. Rating, Stand. Inter
7A		6" Door		Y		
7C	UNIT 309	PDG2 Bkr (150A trip)		Y	PDG2 3P 150	1 PD PXR 20 Stand. Rating, Stand. Inter
7E	UNIT 310	PDG2 Bkr (225A trip)		Y	PDG2 3P 225	1 PD PXR 20 Stand. Rating, Stand. Inter
7M	UNIT 305	PDG5E Bkr (800A trip)		Y	PDG5E 3P 800	1 PD PXR 20 Stand. Rating, Stand. Inter
8B	UNIT 311	PDG2 Bkr (225A trip)		Y	PDG2 3P 225	1 PD PXR 20 Stand. Rating, Stand. Inter
8H	UNIT 314	FVNR Starter Size 5 [TM Ckt Brk]	F206	5 200 Y	Tm. Brk. 3P 400	2 Size 5-6 Starter - Normally Open 2 Size 5-6 Starter - Normally Closed 1 PD PXR 20 Stand. Rating, Stand. Inter 1 Red Run 1 C-H Model D15 NEMA A600, 4 Pole 1 Size 5, STARTER-250VA Typical, w/extra 50VA 1 Description missing for NOCATNUM
8K	UNIT 316	PDG2 Bkr (20A trip)		Y	PDG2 3P 20	1 PD PXR 20 Stand. Rating, Stand. Inter
8M	UNIT 317	PDG2 Bkr (20A trip)		Y	PDG2 3P 20	1 PD PXR 20 Stand. Rating, Stand. Inter
9M	UNIT 312	SPX9000 VFD-VT, 140 FLA, 480V, MCCB		100/140 Y	Tm. Brk. 3P 300	1 Standard Trip 1 Blank Device Panel 1 6 DI, 1 DO, 2 AI, 1 AO, 1 +10 Vdc ref, 2 ext, +24 Vdc/EXT + 24 Vdc 1 2 RO (NC-NO) 1 SPX Upgrade 1 SVX9000 Dv/Dt Output Filter - FR8 1 White Power On 1 Amber Fault 1 1 Unit PB (Reset) 1 Additional 150VA CPT 3 C-H Model D15 NEMA A600, 4 Pole 1 Fdr Bkr 1 N.O.-1 N.C. Aux Sw.
10M	UNIT 313	SPX9000 VFD-VT, 140 FLA, 480V, MCCB		100/140 Y	Tm. Brk. 3P 300	1 Standard Trip 1 Blank Device Panel 1 6 DI, 1 DO, 2 AI, 1 AO, 1 +10 Vdc

The information on this document is created by Eaton Corporation. It is disclosed in confidence and it is only to be used for the purpose in which it is supplied.	PREPARED BY		DATE	Eaton Fayetteville, NC	
	Jacob Simonsen		8/19/2026		
	APPROVED BY		DATE	JOB NAME Linde Phoenix AZ TSMC Phases AP21-1+ 5	
				DESIGNATION 480V MCC#3 13-ES9487.3	
	VERSION		TYPE	DRAWING TYPE	
	1.0.3.7		Freedom Arc Resistant MCC	Customer Appr.	
NEG-ALT Number	REVISION	DWG SIZE	G.O.	ITEM	SHEET
RH130721X6K2-0005		A			9 of 14

Unit	Nameplate	Description	Class	Starter Size HP/FLA Wire Diag.	Bkr/Sw Poles Trip/Clip	Unit Features
						ref, 2 ext, +24 Vdc/EXT + 24 Vdc 1 2 RO (NC-NO) 1 SPX Upgrade 1 SVX9000 Dv/Dt Output Filter - FR8 1 White Power On 1 Amber Fault 1 1 Unit PB (Reset) 1 Additional 150VA CPT 3 C-H Model D15 NEMA A600, 4 Pole 1 Fdr Bkr 1 N.O.-1 N.C. Aux Sw.
11A		6" Door		Y		
11C	UNIT 318	PDG2 Bkr (20A trip)			PDG2	1 PD PXR 20 Stand. Rating, Stand. Inter
				Y	3P 20	
11M	UNIT 315	FVNR Starter Size 6 [TM Ckt Brk]	F206	6 300 Y	Tm. Brk. 3P 600	1 250VA Individual CPT, Fused 2 Size 5-6 Starter - Normally Open 2 Size 5-6 Starter - Normally Closed 1 PD PXR 20 Stand. Rating, Stand. Inter 1 Red Run 1 C-H Model D15 NEMA A600, 4 Pole 1 Size 6, STARTER-250VA Typical, w/extra 50VA
12C		18" Door		Y		
12E	UNIT 319	FVNR Starter Size 2 [TM Ckt Brk]	F206	2 25 &ASU 9487 E-ZK 50 N2.2-HW-NEMA	Tm. Brk. 3P	2 Size 1-4 Starter - Normally Open 2 Size 1-4 Starter - Normally Closed 1 PD PXR 20 Stand. Rating, Stand. Inter 1 Size 2, STARTER-100VA Typical, w/extra 50VA 1 Red Run 1 Bkr Aux-1NO/1NC
12G	UNIT 320	FVNR Starter Size 2 [TM Ckt Brk]	F206	2 25 &ASU 9487 E-ZK 50 N2.2-HW-NEMA	Tm. Brk. 3P	2 Size 1-4 Starter - Normally Open 2 Size 1-4 Starter - Normally Closed 1 PD PXR 20 Stand. Rating, Stand. Inter 1 Size 2, STARTER-100VA Typical, w/extra 50VA 1 Red Run 1 Bkr Aux-1NO/1NC
12K	UNIT 321	FVNR Starter Size 3 [TM Ckt Brk]	F206	3 50 &ASU 9487 E-ZK 70 N2.2-HW-NEMA	Tm. Brk. 3P	1 Size 3, STARTER-150VA Typical, w/extra 50VA 2 Size 1-4 Starter - Normally Open 2 Size 1-4 Starter - Normally Closed 1 Bkr Aux-1NO/1NC 1 PD PXR 20 Stand. Rating, Stand. Inter 1 Red Run
12M	UNIT 332	PDG2 Bkr (150A trip)			PDG2	1 PD PXR 20 Stand. Rating, Stand. Inter
				Y	3P 150	
13M	UNIT 300C	MDPXR Main Tie Bkr			MDPXR	1 PD PXR 25 Stand. Rating, High Inter ARMS LSI
	TIE BREAKER	(2500A trip), Lugs: 5-#4-750Kcmil		Y	3P 2500	1 Blue ARMS 3 Other Specify
The information on this document is created by Eaton Corporation. It is disclosed in confidence and it is only to be used for the purpose in which it is supplied.		PREPARED BY		DATE	Eaton Fayetteville, NC	
		Jacob Simonsen		8/19/2026	JOB NAME Linde Phoenix AZ TSMC Phases AP21-1+ 5	
		APPROVED BY		DATE	DESIGNATION 480V MCC#3 13-ES9487.3	
		VERSION		TYPE	DRAWING TYPE	
		1.0.3.7		Freedom Arc Resistant MCC	Customer Appr.	
NEG-ALT Number		REVISION	DWG SIZE		G.O.	ITEM
RH130721X6K2-0005			A			SHEET
						10 of 14

Unit	Nameplate	Description	Class	Starter Size HP/FLA Wire Diag.	Bkr/Sw Poles Trip/Clip	Unit Features
						1 2 Pos. Sel. Sw. (Misc) 1 Main-Tie-Main using PLC / Operator Interface 1 Cell Position Switch 1 Portable Lift Truck 1 Manual 'Close' PB Cover 1 Electrical Operation 1 Bell Alarm Contact 1 Auxiliary Switch 2A/2B
14B	UNIT 323	FVNR Starter Size 1 [TM Ckt Brk]	F206	1 7.5 &ASU 9487 E-ZK 20 N2.1-HW-NEMA	Tm. Brk. 3P	1 Size 1, STARTER-100VA Typical, w/extra 50VA 2 Size 1-4 Starter - Normally Open 2 Size 1-4 Starter - Normally Closed 1 Standard Trip 1 PD TH FIX STD RAT STD INT 1 Red Run
14D	UNIT 324	FVNR Starter Size 1 [TM Ckt Brk]	F206	1 6 &ASU 9487 E-ZK 20 N2.1-HW-NEMA	Tm. Brk. 3P	1 Size 1, STARTER-100VA Typical, w/extra 50VA 2 Size 1-4 Starter - Normally Open 2 Size 1-4 Starter - Normally Closed 1 Standard Trip 1 PD TH FIX STD RAT STD INT 1 Red Run
14F	UNIT 325	FVNR Starter Size 1 [TM Ckt Brk]	F206	1 2 &ASU 9487 E-ZK 15 N2.1-HW-NEMA	Tm. Brk. 3P	1 Size 1, STARTER-100VA Typical, w/extra 50VA 2 Size 1-4 Starter - Normally Open 2 Size 1-4 Starter - Normally Closed 1 Standard Trip 1 PD TH FIX STD RAT STD INT 1 Red Run
14H	UNIT 326	FVNR Starter Size 1 [TM Ckt Brk]	F206	1 7.5 &ASU 9487 E-ZK 20 N2.1-HW-NEMA	Tm. Brk. 3P	1 Size 1, STARTER-100VA Typical, w/extra 50VA 2 Size 1-4 Starter - Normally Open 2 Size 1-4 Starter - Normally Closed 1 Standard Trip 1 PD TH FIX STD RAT STD INT 1 Red Run
14K	UNIT 327	FVNR Starter Size 1 [TM Ckt Brk]	F206	1 6 &ASU 9487 E-ZK 20 N2.1-HW-NEMA	Tm. Brk. 3P	1 Size 1, STARTER-100VA Typical, w/extra 50VA 2 Size 1-4 Starter - Normally Open 2 Size 1-4 Starter - Normally Closed 1 Standard Trip 1 PD TH FIX STD RAT STD INT 1 Red Run
14M	UNIT 328	FVNR Starter Size 1 [TM Ckt Brk]	F206	1 2 &ASU 9487 E-ZK 15 N2.1-HW-NEMA	Tm. Brk. 3P	1 Size 1, STARTER-100VA Typical, w/extra 50VA 2 Size 1-4 Starter - Normally Open 2 Size 1-4 Starter - Normally Closed 1 Standard Trip 1 PD TH FIX STD RAT STD INT 1 Red Run
15M	UNIT 329	SPX9000 VFD-VT, 140 FLA, 480V, MCCB		100/140 Y	Tm. Brk. 3P 300	1 Standard Trip 1 Blank Device Panel 1 6 DI, 1 DO, 2 AI, 1 AO, 1 +10 Vdc
The information on this document is created by Eaton Corporation. It is disclosed in confidence and it is only to be used for the purpose in which it is supplied.		PREPARED BY	DATE	Eaton Fayetteville, NC		
		Jacob Simonsen	8/19/2026	JOB NAME	Linde Phoenix AZ TSMC Phases AP21-1+ 5	
		APPROVED BY	DATE	DESIGNATION	480V MCC#3 13-ES9487.3	
		VERSION	TYPE	DRAWING TYPE		
		1.0.3.7	Freedom Arc Resistant MCC	Customer Appr.		
NEG-ALT Number	REVISION	DWG SIZE	G.O.	ITEM	SHEET	
RH130721X6K2-0005		A			11 of 14	

Unit	Nameplate	Description	Class	Starter Size HP/FLA Wire Diag.	Bkr/Sw Poles Trip/Clip	Unit Features
						ref, 2 ext, +24 Vdc/EXT + 24 Vdc 1 2 RO (NC-NO) 1 SPX Upgrade 1 SVX9000 Dv/Dt Output Filter - FR8 1 White Power On 1 Amber Fault 1 1 Unit PB (Reset) 1 Additional 150VA CPT 3 C-H Model D15 NEMA A600, 4 Pole 1 Fdr Bkr 1 N.O.-1 N.C. Aux Sw.
16M	UNIT 330	SPX9000 VFD-VT, 140 FLA, 480V, MCCB		100/140 Y	Tm. Brk. 3P 300	1 Standard Trip 1 Blank Device Panel 1 6 DI, 1 DO, 2 AI, 1 AO, 1 +10 Vdc ref, 2 ext, +24 Vdc/EXT + 24 Vdc 1 2 RO (NC-NO) 1 SPX Upgrade 1 SVX9000 Dv/Dt Output Filter - FR8 1 White Power On 1 Amber Fault 1 1 Unit PB (Reset) 1 Additional 150VA CPT 3 C-H Model D15 NEMA A600, 4 Pole 1 Fdr Bkr 1 N.O.-1 N.C. Aux Sw.
17F	UNIT 331	FVNR Starter Size 5 [TM Ckt Brk]	F206	5 200 Y	Tm. Brk. 3P 400	2 Size 5-6 Starter - Normally Open 2 Size 5-6 Starter - Normally Closed 1 PD PXR 20 Stand. Rating, Stand. Inter 1 Red Run 1 C-H Model D15 NEMA A600, 4 Pole 1 Size 5, STARTER-250VA Typical, w/extra 50VA 1 Description missing for NOCATNUM
17H	UNIT 333	PDG2 Bkr (150A trip)			PDG2 3P 150	1 PD PXR 20 Stand. Rating, Stand. Inter
17K	UNIT 334	PDG2 Bkr (80A trip)		Y	PDG2 3P 80	1 PD PXR 20 Stand. Rating, Stand. Inter
17M	UNIT 335	PDG2 Bkr (50A trip)		Y	PDG2 3P 50	1 PD PXR 20 Stand. Rating, Stand. Inter
18A		6" Door		Y		
18C	UNIT 336	PDG2 Bkr (50A trip)			PDG2 3P 50	1 PD PXR 20 Stand. Rating, Stand. Inter
18M	UNIT 332	FVNR Starter Size 6 [TM Ckt Brk]	F206	6 300 Y	Tm. Brk. 3P 600	1 250VA Individual CPT, Fused 2 Size 5-6 Starter - Normally Open 2 Size 5-6 Starter - Normally Closed 1 PD PXR 20 Stand. Rating, Stand. Inter 1 Red Run 1 C-H Model D15 NEMA A600, 4 Pole 1 Size 6, STARTER-250VA Typical, w/extra 50VA
The information on this document is created by Eaton Corporation. It is disclosed in confidence and it is only to be used for the purpose in which it is supplied.		PREPARED BY	DATE	Eaton Fayetteville, NC		
		Jacob Simonsen	8/19/2026	JOB NAME	Linde Phoenix AZ TSMC Phases AP21-1+ 5	
		APPROVED BY	DATE	DESIGNATION	480V MCC#3 13-ES9487.3	
		VERSION	TYPE	DRAWING TYPE		
		1.0.3.7	Freedom Arc Resistant MCC	Customer Appr.		
NEG-ALT Number	REVISION	DWG SIZE	G.O.	ITEM	SHEET	
RH130721X6K2-0005		A			12 of 14	

Unit	Nameplate	Description	Class	Starter Size HP/FLA Wire Diag.	Bkr/Sw Poles Trip/Clip	Unit Features
19B	UNIT 337	PDG2 Bkr (30A trip)			PDG2	1 PD PXR 20 Stand. Rating, Stand. Inter
				Y	3P 30	
19D	UNIT 338	PDG2 Bkr (80A trip)			PDG2	1 PD PXR 20 Stand. Rating, Stand. Inter
				Y	3P 80	
19F	UNIT 339	FVNR Starter Size 1 [TM Ckt Brk]	F206	1 10 &ASU 9487 E-ZK 20 N2.1-HW-NEMA	Tm. Brk. 3P	1 Size 1, STARTER-100VA Typical, w/extra 50VA 2 Size 1-4 Starter - Normally Open 2 Size 1-4 Starter - Normally Closed 1 Standard Trip 1 PD TH FIX STD RAT STD INT 1 Red Run
19H	UNIT 340	FVNR Starter Size 1 [TM Ckt Brk]	F206	1 10 &ASU 9487 E-ZK 20 N2.1-HW-NEMA	Tm. Brk. 3P	1 Size 1, STARTER-100VA Typical, w/extra 50VA 2 Size 1-4 Starter - Normally Open 2 Size 1-4 Starter - Normally Closed 1 Standard Trip 1 PD TH FIX STD RAT STD INT 1 Red Run
19K	UNIT 341	FVNR Starter Size 1 [HMCP]	F206	1 10 &ASU 9487 E-ZK 15 N2.1-HW-NEMA	HMCP 3P	1 Size 1, STARTER-100VA Typical, w/extra 50VA 2 Size 1-4 Starter - Normally Open 2 Size 1-4 Starter - Normally Closed 1 Standard Trip 1 Breaker HMCP 1 Red Run
19M	UNIT 342	FVNR Starter Size 2 [TM Ckt Brk]	F206	2 25 &ASU 9487 E-ZK 50 N2.2-HW-NEMA	Tm. Brk. 3P	2 Size 1-4 Starter - Normally Open 2 Size 1-4 Starter - Normally Closed 1 PD PXR 20 Stand. Rating, Stand. Inter 1 Size 2, STARTER-100VA Typical, w/extra 50VA 1 Red Run 1 Bkr Aux-1NO/1NC
20B		12" Door		Y		
20E		18" Door		Y		
20G	UNIT 343	FVNR Starter Size 2 [TM Ckt Brk]	F206	2 25 &ASU 9487 E-ZK 50 N2.2-HW-NEMA	Tm. Brk. 3P	2 Size 1-4 Starter - Normally Open 2 Size 1-4 Starter - Normally Closed 1 PD PXR 20 Stand. Rating, Stand. Inter 1 Size 2, STARTER-100VA Typical, w/extra 50VA 1 Red Run 1 Bkr Aux-1NO/1NC
20K	UNIT 344	FVNR Starter Size 3 [TM Ckt Brk]	F206	3 50 &ASU 9487 E-ZK 70 N2.2-HW-NEMA	Tm. Brk. 3P	1 Size 3, STARTER-150VA Typical, w/extra 50VA 2 Size 1-4 Starter - Normally Open 2 Size 1-4 Starter - Normally Closed 1 Bkr Aux-1NO/1NC 1 PD PXR 20 Stand. Rating, Stand. Inter
The information on this document is created by Eaton Corporation. It is disclosed in confidence and it is only to be used for the purpose in which it is supplied.			PREPARED BY	DATE	Eaton Fayetteville, NC	
			Jacob Simonsen	8/19/2026		
			APPROVED BY	DATE	JOB NAME	Linde Phoenix AZ TSMC Phases AP21-1+ 5
					DESIGNATION	480V MCC#3 13-ES9487.3
			VERSION	TYPE	DRAWING TYPE	
			1.0.3.7	Freedom Arc Resistant MCC	Customer Appr.	
NEG-ALT Number			REVISION	DWG SIZE	G.O.	ITEM
RH130721X6K2-0005				A		SHEET 13 of 14

Unit	Nameplate	Description	Class	Starter Size HP/FLA Wire Diag.	Bkr/Sw Poles Trip/Clip	Unit Features
20M	UNIT 345	PDG2 Bkr (150A trip)			PDG2	1 Red Run 1 PD PXR 20 Stand. Rating, Stand. Inter
				Y	3P 150	
21M	UNIT 300D	MDPXR Bkr (2500A			MDPXR	1 PD PXR 25 Stand. Rating, High Inter ARMS LSI
	GENERATOR	trip)		Y	3P 2500	1 Blue ARMS 3 Other Specify 1 2 Pos. Sel. Sw. (Misc) 1 Cell Position Switch 1 Description missing for NOCATNUM 1 Electrical Operation 1 Bell Alarm Contact 1 Auxiliary Switch 2A/2B
22C	UNIT 301B	Voltmeter and Switch				1 Additional X-Space
				&ASU 9487 E-ZK N19-HW-NEMA		
22E	BUS B MAIN BREAKER PT'S	12 in. blank relay panel		Y		
22G	BUS B MAIN BREAKER CONTROL POWER	PDG2 Bkr (30A trip)		Y	PDG2 3P 30	1 PD TH FIX STD RAT STD INT 1 Standard Trip
22J		12" Door		Y		
22M		18" Door		Y		
23M	UNIT 300B	MDPXR Main 3 Bkr			MDPXR	1 PD PXR 25 Stand. Rating, High Inter ARMS LSI
	BUS B MAIN	(2500A trip), Lugs: 5-#4-750Kcmil		Y	3P 2500	1 Blue ARMS 3 Other Specify 1 2 Pos. Sel. Sw. (Misc) 1 Main-Tie-Main using PLC / Operator Interface 1 Cell Position Switch 1 Portable Lift Truck 1 Manual 'Close' PB Cover 1 Electrical Operation 1 Bell Alarm Contact 1 Auxiliary Switch 2A/2B
The information on this document is created by Eaton Corporation. It is disclosed in confidence and it is only to be used for the purpose in which it is supplied.		PREPARED BY	DATE	Eaton Fayetteville, NC		
		Jacob Simonsen	8/19/2026	JOB NAME	Linde Phoenix AZ TSMC Phases AP21-1+ 5	
		APPROVED BY	DATE	DESIGNATION	480V MCC#3 13-ES9487.3	
		VERSION	TYPE	DRAWING TYPE		
		1.0.3.7	Freedom Arc Resistant MCC	Customer Appr.		
NEG-ALT Number	REVISION	DWG SIZE	G.O.	ITEM	SHEET	
RH130721X6K2-0005		A			14 of 14	

General Information: ENCLOSC

Description	Value
=====	=====
PRODUCT INFORMATION	
CATALOG NUMBER:	ECN2478CAU-CA
COUNTRY:	USA Enclosed Control
LEAD TIME CODE:	U
LEAD TIME (BUSSINESS DAYS):	140 Days
QTY:	1
=====	=====
ENCLOSED CONTROL	
STARTER DESIGN:	NEMA - Freedom
STARTER/CONTACTOR TYPE:	Full Voltage Non-Rev.
=====	=====
STARTER CONFIGURATION	
MOTOR/LOAD VOLTAGE:	460V
COIL VOLTAGE:	120V/60 110V/50
CPT SELECTION:	C7 - With 300 VA extra capacity CPT, 120V/60HZ, 110V
-	50HZ secondary w/2 primary & 1 secondary fuse
MAX HORSEPOWER RATING:	600
NOMINAL MOTOR / LOAD AMPS:	Consult Factory
RESULTANT SIZE:	7
OVERLOAD TYPE:	SSOL - C440
=====	=====
ENCLOSURE	
DISCONNECT:	Circuit Breaker
DISCONNECT RATING (FURE CLIP OR CIRCUIT BREAKER):	Engineering will determine size
ENCLOSURE TYPE:	NEMA 12 - Dusttight

The information on this document is created by Eaton Corporation. It is disclosed in confidence and it is only to be used for the purpose in which it is supplied.

PREPARED BY
Jacob Simonsen

DATE

8/19/2026



APPROVED BY

DATE

JOB NAME **Linde Phoenix AZ TSMC Phases AP21-1+ 5**

DESIGNATION **13.ES9487.1D**

VERSION

1.0.5.2

TYPE

ENCLOSC

DRAWING TYPE

Customer Appr.

NEG-ALT Number

RH130721X6K2-0005

REVISION

0

DWG SIZE

A

G.O.

ITEM

SHEET

1 of 1